

Camojojo Trail Camera  
Quick Start Guide



Model: Trace  
(V 3.0)




camojojo.com  
support@camojojo.com

Toll-Free: 888 533 1006  
MON-FRI: 9 AM-5 PM CST

What's in the Box & Camera Introduction



Features

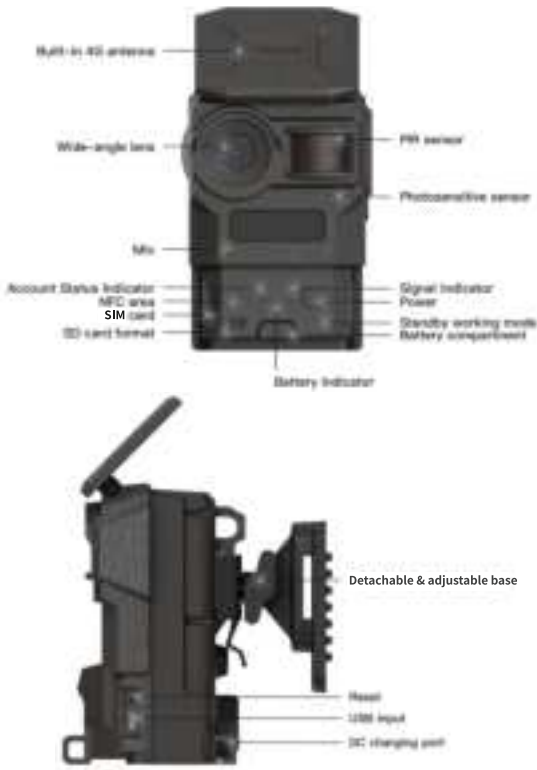

Indicator Light Specification

	Light States	Descriptions
Account Indicator Light	Solid green light	The camera has bound to the account and connected to the server successfully
	Slowly blink green light (1s interval)	The camera is syncing with the server
	Solid yellow light	The camera is in debug mode
	Quickly blink yellow light (0.5s interval)	The camera is formatting on Setup mode
	Slowly blink red light (1s interval)	The camera has bound to the account, but failed to connect with the server
Battery Indicator Light	Solid red light	The camera has not been bound to the account. If the indicator light continues to red after you adding the camera to your smartphone, please contact our support team for help with support@camojojo.com
	Solid green light	The battery power is more than 80% or the DC charger is connected
	Quickly blink green light (0.5s interval)	Firmware updating
	Solid yellow light	The battery power is between 20% to 80%
	Quickly blink yellow light (0.5s interval)	Firmware updating failed
	Solid red light	The battery power is less than 20%
	Quickly blink red light (0.5s interval)	Low power, the camera will turn off after 1s

Signal Indicator Light	Slowly blink green light (1s interval)	The network of camera is initializing and connecting
	Solid green light	There is a SIM card in the camera and the signal is strong
	Solid yellow light	There is a SIM card in the camera and the signal is good
	Solid red light	There is a SIM card in the camera and the signal is weak or fail to connect the server
	Slowly blink red light (1s interval)	No SIM card or the camera does not support the SIM card
Indicator Lights Combination	Quickly blink red light (0.5s interval)	Fail to connect to the server, confirm the camera is in available data plan and try to restart
	All lights in solid red light for a while, then all lights turn off	Camera reset



Step1: Unpack the camera box, install batteries and turn on the camera

1. Install the batteries (NOT INCLUDED) and check MEGA SIM card (INCLUDED).

(1) Start by opening the camera's latch, then insert 12 AA batteries into the battery compartment the right way, and finally, push the battery compartment into the camera until you hear a "click."



(2) Please check and confirm the MEGA SIM card was inserted in your camera (included in the SIM card slot).



(3) Open the latch, short press the Power to turn on the camera.

(4) You will see 3 indicator lights (account indicator, battery indicator and signal indicator) in solid green if everything goes well (the account indicator is in solid red light before you bind the camera to your account).



Step2: Download App and add the camera


1. Install the Camojojo App.



2. Sign in after creating an account in Camojojo App.  
3. Add the camera by NFC or scanning QR code.




4. Name and group your camera.

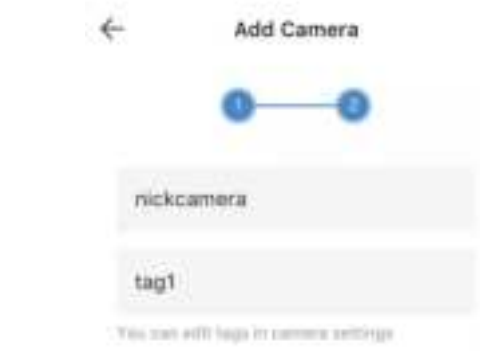

5. After adding your camera to your account (App), close the latch of the camera, then start to use it.

Step3: Start using your cellular trail camera with App

1. You can view camera card in your App (Home->Trail Camera->Device) and see the detailed status of the camera by clicking "Status" button under the camera card.

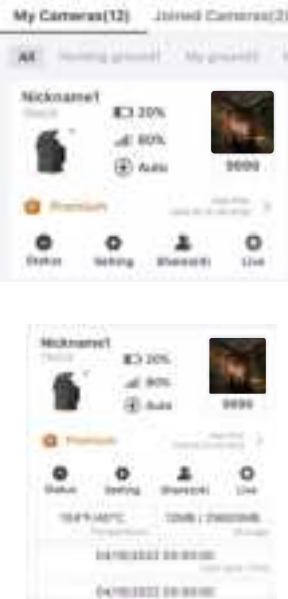

2. You can press the Power if the latch is open (the camera is in Setup mode) to take a photo and send to your phone.



3. You can wave your hand in front of the camera to get new photo/video by PIR when the latch is closed (the camera is in ON mode), the indicator light will flash once the PIR has been triggered successfully.



4. If everything goes well, congratulations, and enjoy it.

Camera Default Settings

Work Mode	Eco/Auto/Boost	Time Lapse	OFF/ON
Camera Mode	Photo/Video/Photo+Video	Flash Power	High/Low
Image Size	5M/3M	Working Timer1	OFF/ON
Multi-Shot	OFF/2P/3P	Working Timer2	OFF/ON
Video Size	1080P/720P	Water Stamp	OFF/ON
Send Frequency	3H/6H/12H/24H	Battery Type	Alkaline/Ni-MH/Lithium
PIR Sensitivity	0-9	Cycling Recording	OFF/ON
PIR Delay	OFF/ON		

Note:

1. The camera only works with the MEGA SIM card (included in package).  
2. The camera setting can only be changed via App.  
3. The camera will get a longer battery life if you use Eco for Work Mode, in which photos and videos can't be sent instantly.  
4. The camera in Eco mode will update status and settings within 24H. If the camera is in Auto mode and Boost mode, it will update status and settings after a trigger occurs. If the camera is in the Boost mode, the status and settings will update instantly.  
5. The camera will only send the first photo to your phone and all photos will be saved in the SD card if you turn on Multi-Shot.  
6. If you use the AA batteries with your camera, please do not change the Battery Type in the settings.

Data Plan

Premier	Elite
• Unlimited Pics / Videos per month • 365 days cloud storage • 20 HD per month • 20 min live stream per month	• 800 Pics / Videos per month • 365 days cloud storage • 10 HD per month • 10 min live stream per month
Basic	Free Trial
• 300 Pics / Videos per month • 365 days cloud storage	• Unlimited Pics / Videos in first 7 days • 7 days cloud storage
HD Package	Live Stream Package
• 100 HD items for Pics & Video • Available for all cameras	• 60 min live stream • Available for all cameras

Note:

1.The items in data plan include pics/video transmission quota, cloud storage for pics/video and live stream minutes are based on the camera. The HD quota included in the data plan could be shared to other cameras in your account.  
2.The HD package includes 100 HD quota for all cameras in your account.  
3.The live stream package includes 60 minutes for all cameras in your account.  
4.Choose the data plan and package suit you best.

The price and more detailed information about data plan please view on [www.camojojo.com](http://www.camojojo.com)