

Triple Monitor Desk Mount

Instruction Manual



75×75mm
100×100mm

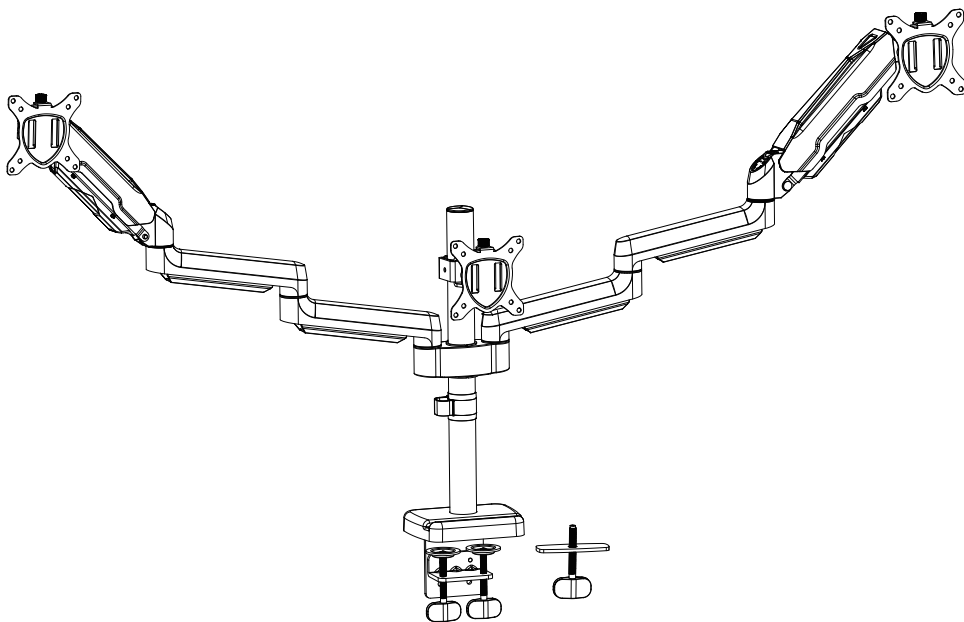

Each Monitor:
4.4 lbs ~ 19.8 lbs
(2kg ~ 9kg)

AHP-63-22_US2.0

If you have any questions, please feel free to contact our customer support before returning.



Safety Caution

BEFORE ASSEMBLY

- Layout all components and hardware. Check all parts are included and undamaged.
- Should anybody intends to install or use this mount, please read and understand this manual carefully.
- If you do not understand these instructions or have any doubt about the safety instructions, assembly or use of this product, please contact our customer service.


WARNING

- This product contains small items that could be a choking hazard if swallowed.
- **KEEP AWAY FROM CHILDREN UNDER 3 YEARS OLD. ADULT SUPERVISION IS REQUIRED.**
- Improper installation, such as using the product for monitors over its load capacity or for any purpose not explicitly specified, may cause damage or serious injury. We would not be liable for any damage or injury caused by improper mounting or inappropriate use.

CAUTION AND MAINTENANCE

- Never allow children to climb, stand, hang, or play on any part of monitor or stand.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
- Check that the bracket is secure and safe to use at regular intervals (at least every three months).

PACKAGE CONTENTS

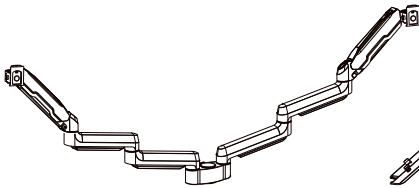


1A (x1)
Arm



1B (x2)
Cable Cover



02 (x3)
VESA Plate




03 (x1)
Pole



04 (x1)
Decorative Cover




05 (x1)
Support Plate



06 (x1)
L Plate



07 (x1)
Clamp




08 (x1)
Middle Head



09 (x2)
Plastic Spacer

All are included in 07



7-1
Bracket



7-2
Clip Plate



7-3
Bolt



7-4
screw



7-5
Washer



A (x2)
Bolt
M6×8mm



B (x2)
Bolt
M6×10mm



C (x1)
Bolt
M8×10mm



D1 (x1)
Allen Key
5mm



D2 (x1)
Allen Key
6mm



E (x3)
Pad



F (x3)
Security Bolt



G (x1)
Cable Clip



M-A (x12)
Screw M4×12mm



M-B (x12)
Screw M4×30mm



M-C (x12)
Washer d5mm




M-D (x24)
Spacer H5mm

ASSEMBLY STEPS

STEP 1: Apply Pads to the Base Bottom


Apply the pads (E) onto the bottom of pole (03) to avoid desk scratches.

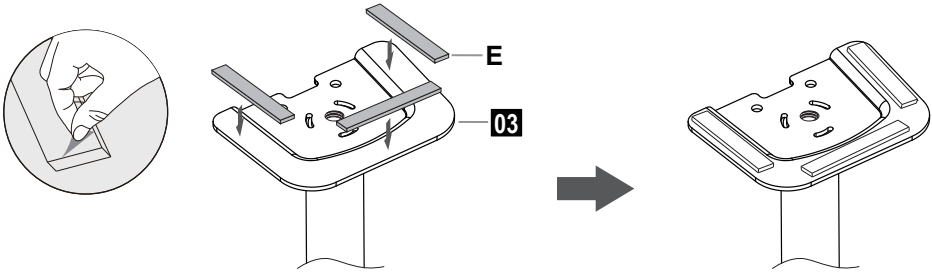

STEP 2: Clamp Installation or Grommet Base Installation



OPTION A : Clamp Installation

1. Connect the base of pole (03) and the L plate (06) by using the screws (A).
2. Tighten the screw (C).
3. Connect the clamp (07) and the L plate (06) by using the screws (B).

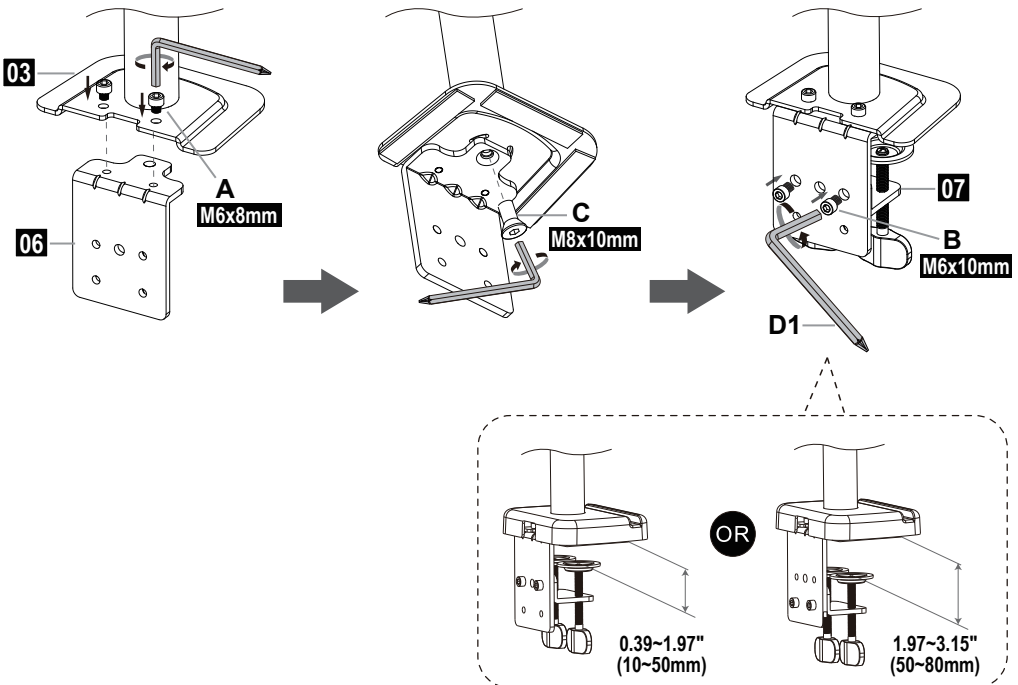



STEP 2: Continued

Fix the decorative cover (04) to the base of pole (03) and fix the bracket on the table by tightening the clamp (07).


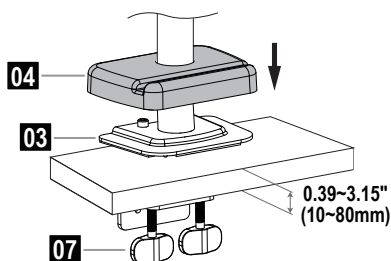


OPTION B: Grommet Base Installation

Detach the bolt (7-3) from the clamp (07).




Use the bolt (7-3) through the hole on support plate (05) to fix the pole (03) and the table board together. Install the decorative cover (04) to base finally.

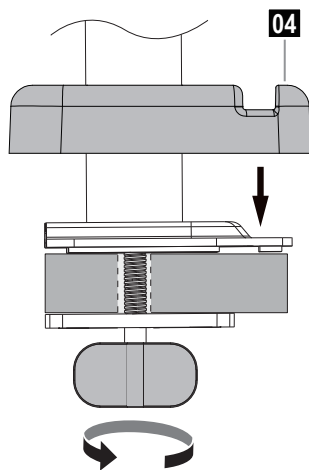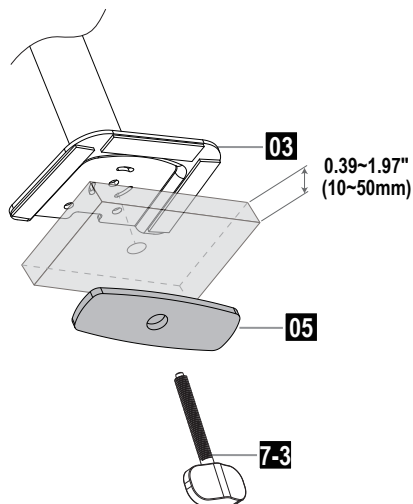

STEP 3: Arm Installation

Install the cable clip (G), arm (1A) and middle head (08) to the pole as shown below.
Then fasten the bolts with Allen key (D2).

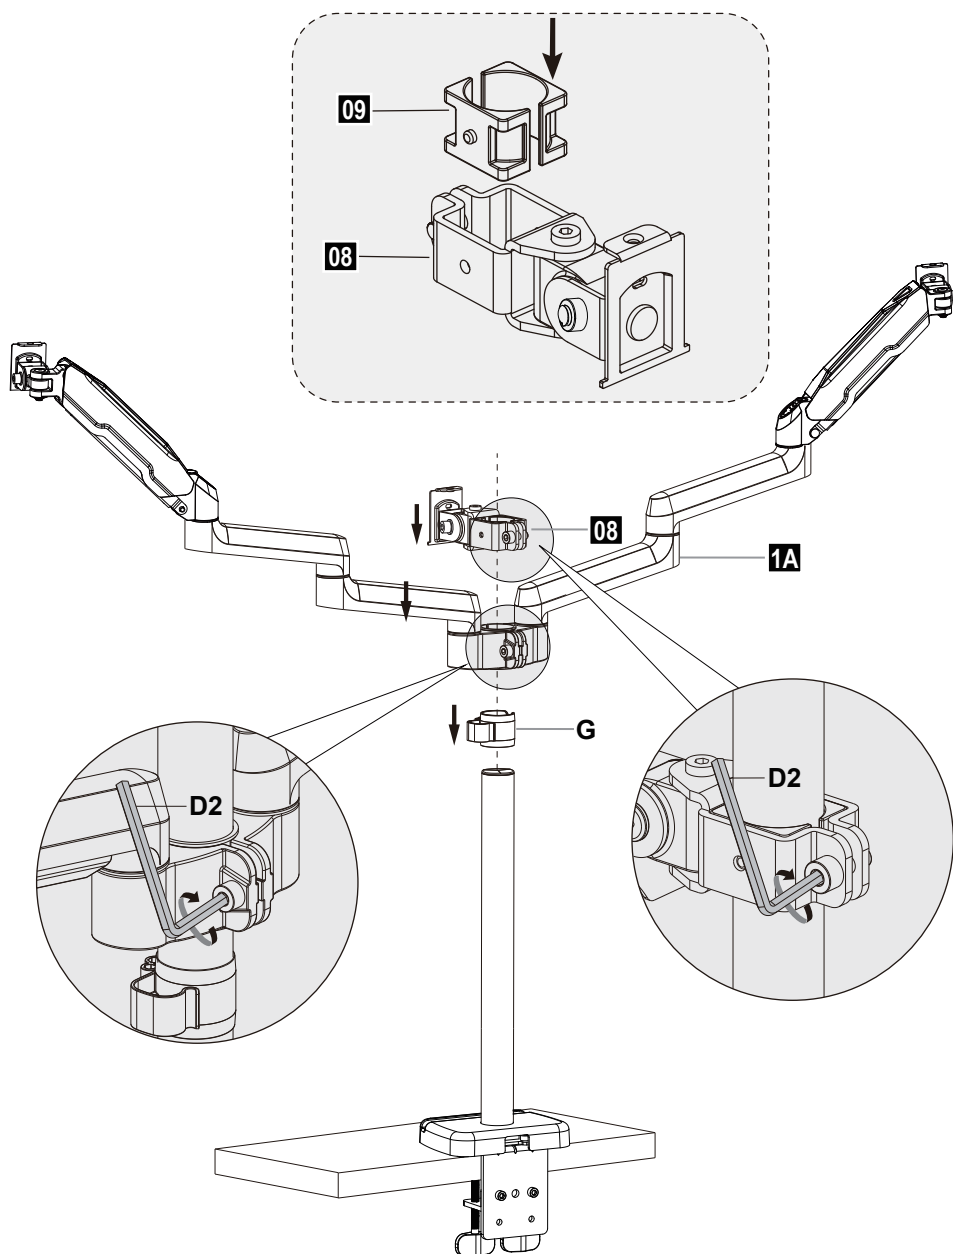



STEP 4: Attach Monitor

OPTION A: Flat Back Monitor

Attach the VESA plate (02) to back of monitor and secure it with screws and washers by using Allen key (D1).




!
Please make sure you don't tighten the screws much excessively or it may cause your monitor damage.

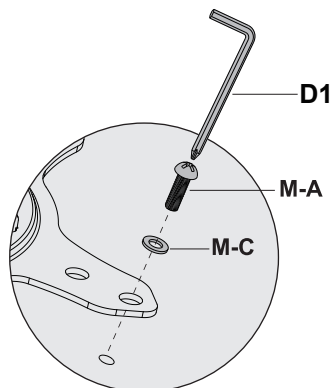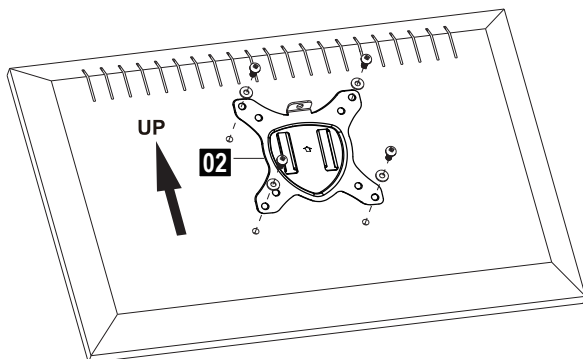



OPTION B: For Recessed / Curved Back Monitor

Attach the VESA plate (02) to back of monitor and secure it with screws, washers and spacers by using Allen key (D1).

Put 4 spacers between VESA plate and monitor.
Install 4 long screws through VESA plate, spacers to monitor via mounting holes.



!
Please make sure you don't tighten the screws much excessively or it may cause your monitor damage.

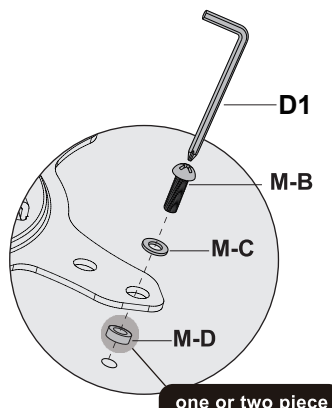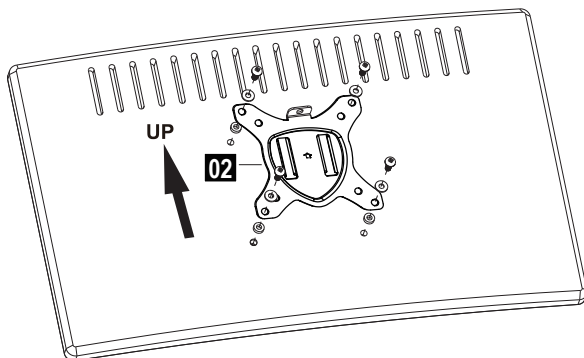


STEP 5: Hang Monitor


Slide the monitor onto the head of arm (1A), then install the security bolts (F). Make sure the security bolts (F) is installed before you rotate the monitor.

Attention:

The initial pressure value of the gas spring is set to a minimum value. So when the monitor is hung on, you need to hold it with both hands and leave the monitor in a slow and gentle way. DO NOT let it go down suddenly.

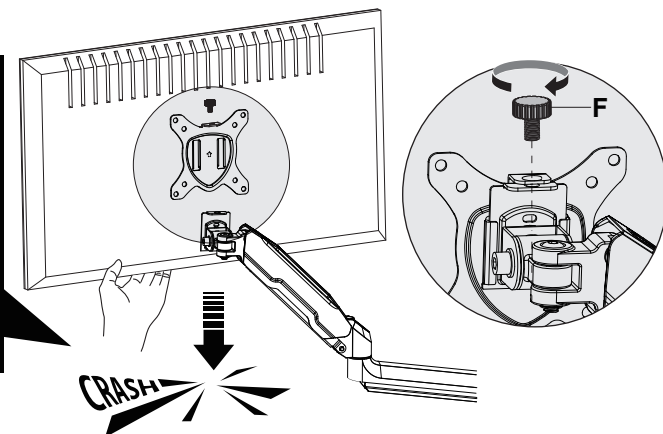

refer to below illuminations to adjust tilting angle of your monitor

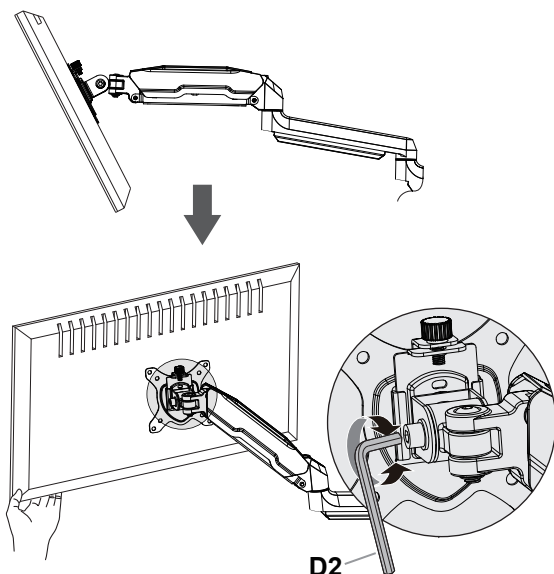

Problem:



If the monitor is facing down.

Solution:

1. Loosen the tilting bolt.
2. Hold the bottom of monitor with one hand and adjust to determine your desired tilt angle.
3. Retighten the tilting bolt towards "+" to fix the angle.

STEP 6: Tension Adjustment

For intended functioning of the mount, you will need to adjust the tension of arm in accordance with your monitor weight by 6mm Allen key (D2).

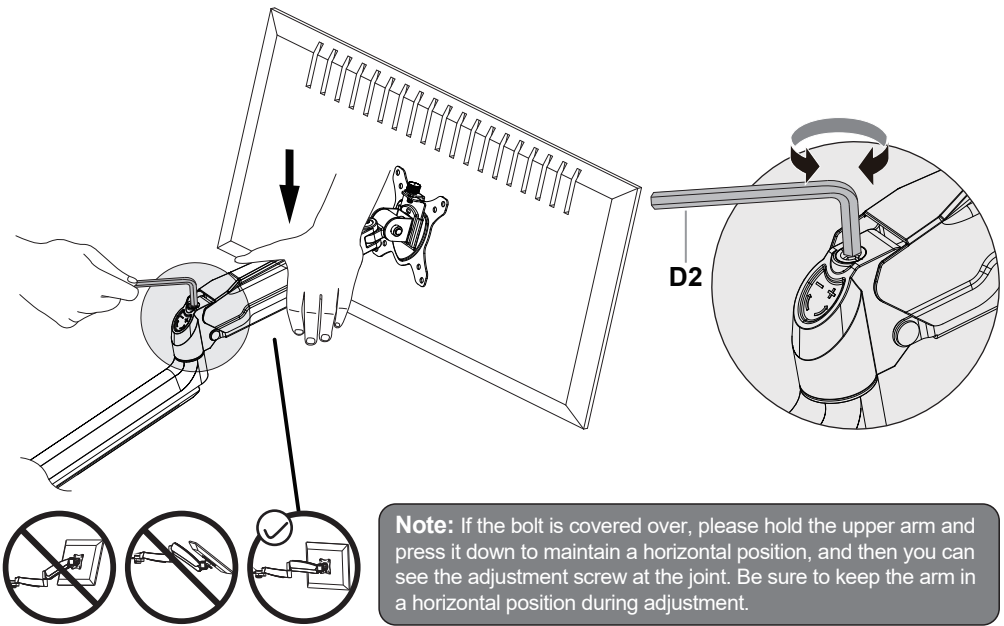


Situation 1: Arm falls down

Upper Arm with monitor falls down and fails to stay where intended.

Solution:



Turn the inside screw counterclockwise (“+” direction) to increase gas spring tension until the arm can stay as intended.



Situation 2: Arm rises up or can't press down

Upper Arm with monitor rises up and fails to stay where intended.

Solution:





Turn the inside screw clockwise (“-” direction) to decrease gas spring tension until the arm can stay as intended.

Note: For how many circles the screw should be turned, please refer to the table below.

Monitor Weight	4.4 lbs (2kg)	6.6 lbs (3kg)	8.8 lbs (4kg)	11 lbs (5kg)	13.2 lbs (6kg)	15.4 lbs (7kg)	17.6 lbs (8kg)	19.8 lbs (9kg)
Circles (AT LEAST)	min	2	4	6	8	10	12	15

STEP 7: Cable Management

Run cables through the cable cover.

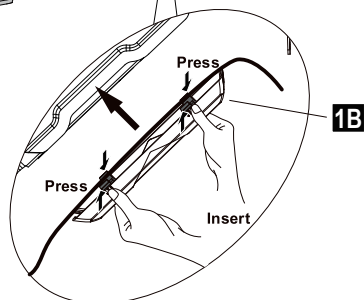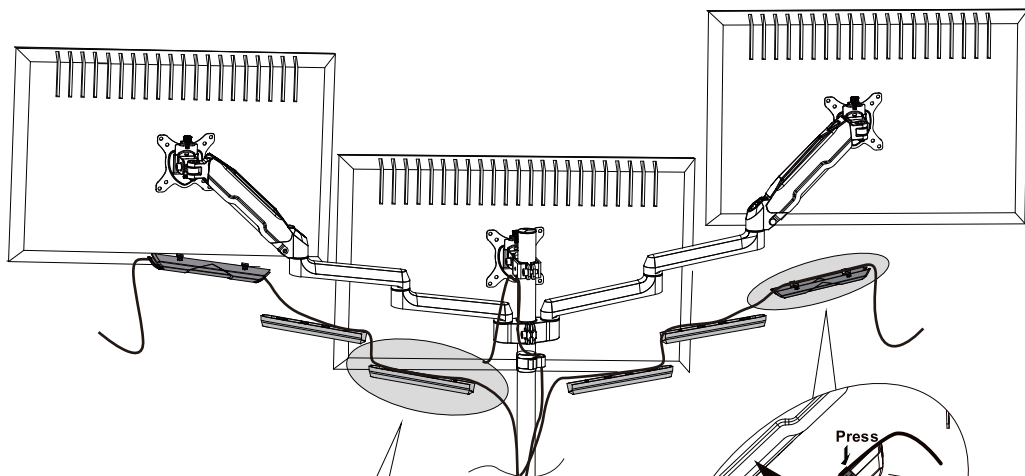


Upper Arm

Run cables through the cable cover (1B), then insert the cable cover into the upper arm.

Lower Arm



1. Remove the bottom cable cover.
2. Run cables through the cable cover.
3. Install and fix the cable cover on the arm.

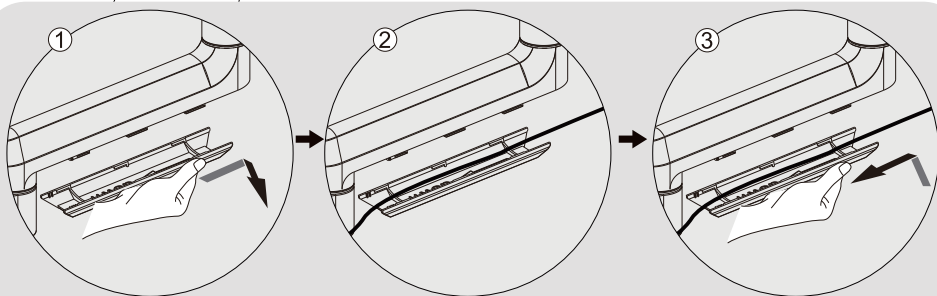


Adjust as Desired

Adjust monitor position and rotation. Store Allen keys in cable clip for future use.

- ☒ Tilt
- ☒ Swivel
- ☒ Rotation
- ☒ Height

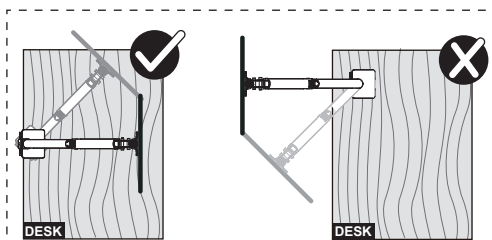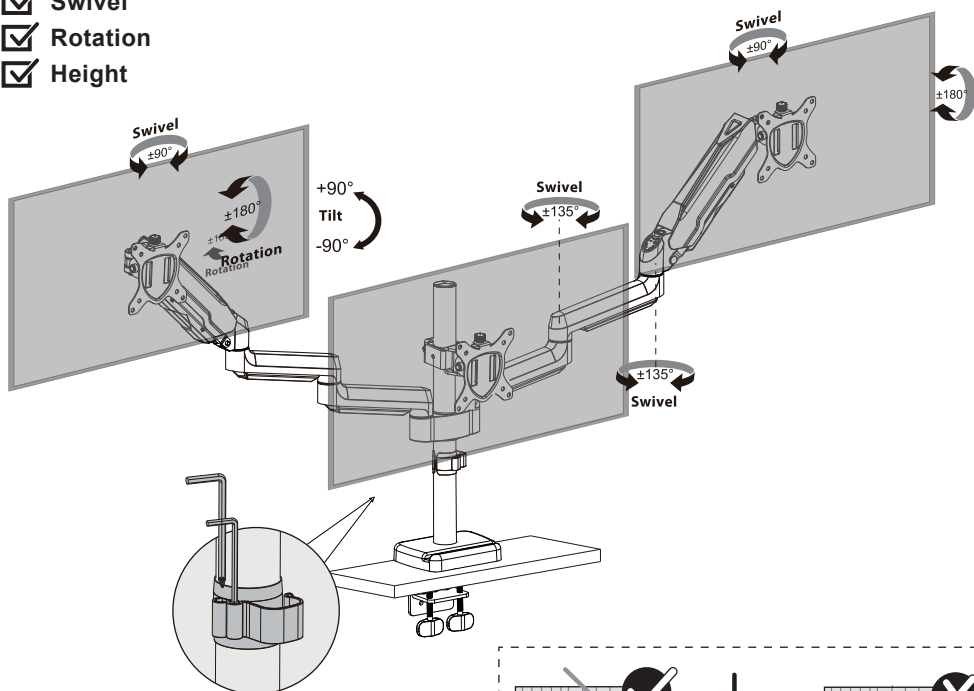

Please do not move stand outside desk for safety!



Note: To ensure stability, the tightness of the rotating axis has been preset, so it would be kind of difficult to rotate the VESA plate.

Suggestion: Please attach the monitor first, then hold the two sides of it with both hands, and rotate vigorously. If that doesn't work out, please do not hesitate to ask for our help.

Product Dimensions

