



All-in-1 Laptop Powerbank 24000


Quick guide

420-57




www.sandberg.world


Overview

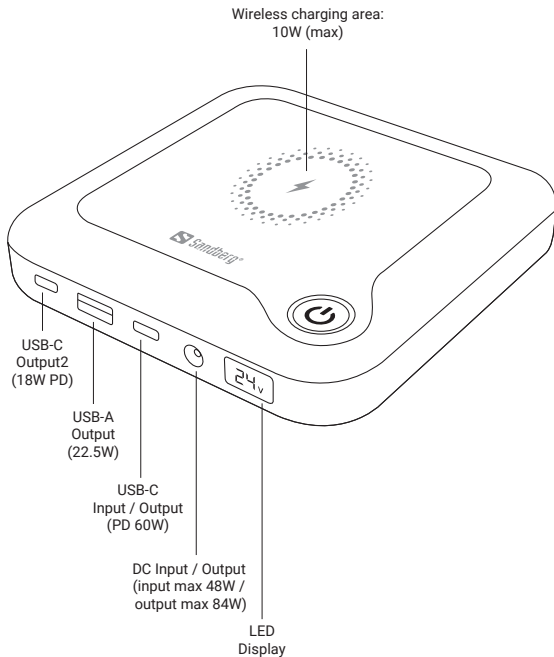

Detailed specification

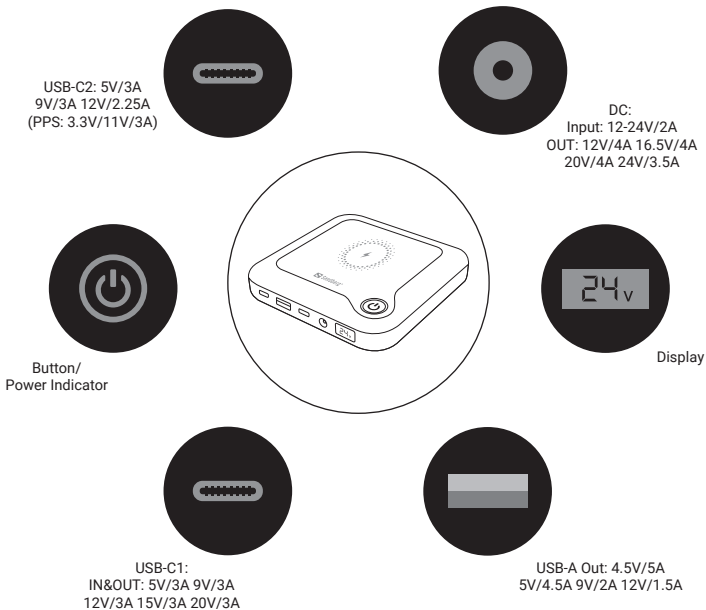

How to charge the power bank

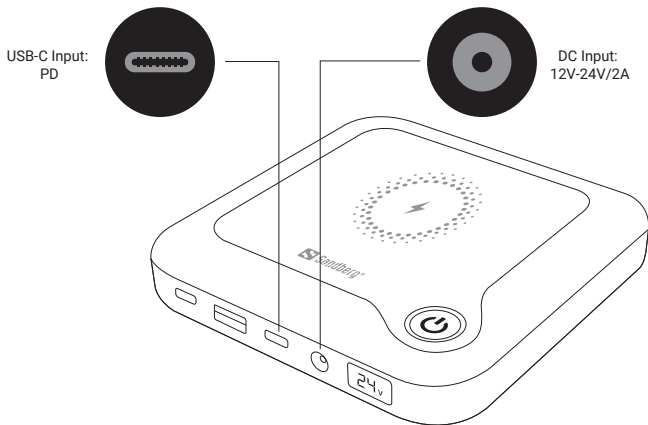

DC/PD Input



Solar Panel
Charger




Car
Charger



Wall
Charger

Power indicator button

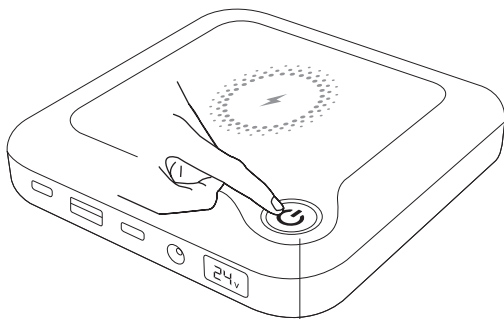

Press short to get
charging status:



1 LED: 25%



2 LED: 50%



3 LED: 75%




4 LED: 100%




LED: after 5 seconds

Charging a laptop with DC cable - important note

1. Choose correct tip to fit the DC port of your laptop.
2. Set the correct voltage on the power bank:
Keep long press on the button until display is flashing.

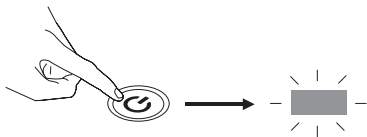

Click button short to step between Voltage 12V/16.5V/20V/24V.




3. Connect the laptop, charge will start.
4. After disconnecting the laptop, you need to set the Voltage next time.


For safety it will always start the cycle at lowest setting 12V.

NOTE: If you are in doubt on what DC-Voltage to choose, have a look at the label on the AC charger for the laptop.

Wireless charger

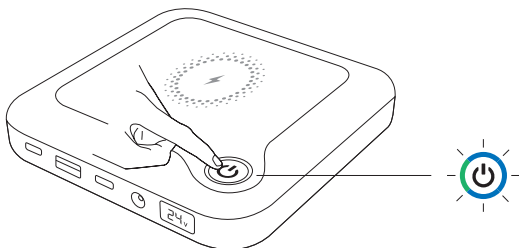

Press short on the button to activate the power bank. First 5 seconds the blue status LED is shown, then one green LED comes on to indicate wireless charge is ready. Turns blue when charging correctly..



Place mobile phone on the surface.



Support

<http://helpdesk.sandberg.world>

Warranty

There is a five-year warranty on your Sandberg product.
Please read the warranty terms and register your new
Sandberg product at www.sandberg.world/warranty

5
Years
Warranty



Sandberg All in One laptop
power bank 24000

Capacity: 3.7V/24000mAh/88.8Wh

USB-C input: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A

DC input: 12-24V/2A

Wireless output: 10W (MAX)

DC output: 12V/4A, 16.5V/4A, 20V/4A, 24V/3.5A

USB-A output: 4.5V/5A, 5V/4.5A, 9V/2A, 12V/1.5A

USB-C output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A

USB-C2 output: 5V/3A, 9V/3A, 12V/2.25A (PPS: 3.3V-11V/3A)

Item no. 420-57

www.sandberg.world

Made in China

Sandberg A/S

Bregnerødvej 133D,

3460 Birkerød, Denmark

UK
CA



For information on handling electronic waste, see www.sandberg.world/weee