

Bluetooth Switches Installation Manual | A v07



BT-4BTWS-A



BT-8BTWS-A



BT-DMSW-A

**This page intentionally
blank.**

WARNING!

**SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH
LOCAL AND NATIONAL ELECTRICAL CODES**

For indoor installations.



Risk of Electric Shock. All servicing should be performed by qualified service personnel.
To reduce the risks of electric shock disconnect power supplies before servicing.

SAVE THESE INSTRUCTIONS

- READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
- Be aware that Line Voltage Connections may be 120Vac or 277Vac or 347Vac
- Do not install near gas or electric heaters.
- Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for other than intended use
 - o Wireless devices are only for lighting control
 - o Wireless controls cannot be used with portable heating appliances

Contents

Bluetooth Switches Installation Manual | A v07

1. Introduction	5
2. Part Numbers & Names	5
3. Design Features	6
4. Specifications	6
Mounting	
Power	
Operating Environment	
Storage Temperature	
Approvals	
Note	
5. Dimensions	7
6. Installation Features	7
7. Installation / Wiring / Commissioning	8

1. Introduction

Douglas Lighting Controls **Bluetooth®** Wall Station Switches;

- BT-4BTSW-A (4-button switch)
- BT-8BTSW-A (8-button switch)
- BT-DMSW-A (dimmer & 1-button switch)

Provide ON/OFF, Dimming, and Scene control based on the device configuration and fixture wiring. The devices require a Douglas Lighting Controls Bluetooth Controller (BT-PP20-A) connected to the fixture(s).

Each switch is available in either a 120/277VAC or 347VAC model. The devices are capable of communicating with other Douglas Lighting Controls Bluetooth enabled devices (occupancy sensors, gateways, and controllers as part of the defined wireless eco-system) via the Bluetooth wireless network.

Commissioning is conveniently done at deck level with our free iOS App using the Bluetooth functionality of the smartphone.

2. Part Numbers & Names

Part Number	Model
BT-4BTSW-U-A	DOUGLAS LIGHTING CONTROLS Bluetooth 4-Button Switch 120/277VAC
BT-4BTSW-3-A	DOUGLAS LIGHTING CONTROLS Bluetooth 4-Button Switch 347VAC
BT-8BTSW-U-A	DOUGLAS LIGHTING CONTROLS Bluetooth 8-Button Switch 120/277VAC
BT-8BTSW-3-A	DOUGLAS LIGHTING CONTROLS Bluetooth 8-Button Switch 347VAC
BT-DMSW-U-A	DOUGLAS LIGHTING CONTROLS Bluetooth Dimmer & 1-Button Switch 120/277VAC
BT-DMSW-3-A	DOUGLAS LIGHTING CONTROLS Bluetooth Dimmer & 1-Button Switch 347VAC

3. Design Features

- Standard single gang dimensions
- Tinned and stripped, colour coded wires
- Bluetooth wireless technology
- 120/277VAC models
- 347VAC models

4. Specifications

Mounting

- The device is designed to be mounted into the appropriately sized 120/277VAC or 347VAC wall station gang box

Power

- Line Voltage: 120/277VAC or 347VAC (device dependent)
- Frequency: 60Hz

Operating Environment

- Indoor, stationary, non-vibrating, non-corrosive atmosphere and non-condensing humidity

Operating Temperature

- 32°F to 104°F (0°C to 40°C)

Storage Temperature

- -14° to 140°F (-25° to 60°C)


Approvals

- Certified to CAN/CSA Std. C22.2 No. 14
- Conforms to UL 508 Standard
- FCC Class A
- ASHRAE 90.1 Compliant
- CEC Title 24 Compliant

Note

- Contains IC: 8254A-B1010SP0
- Contains FCC ID: W7Z-B1010SP0

5. Dimensions

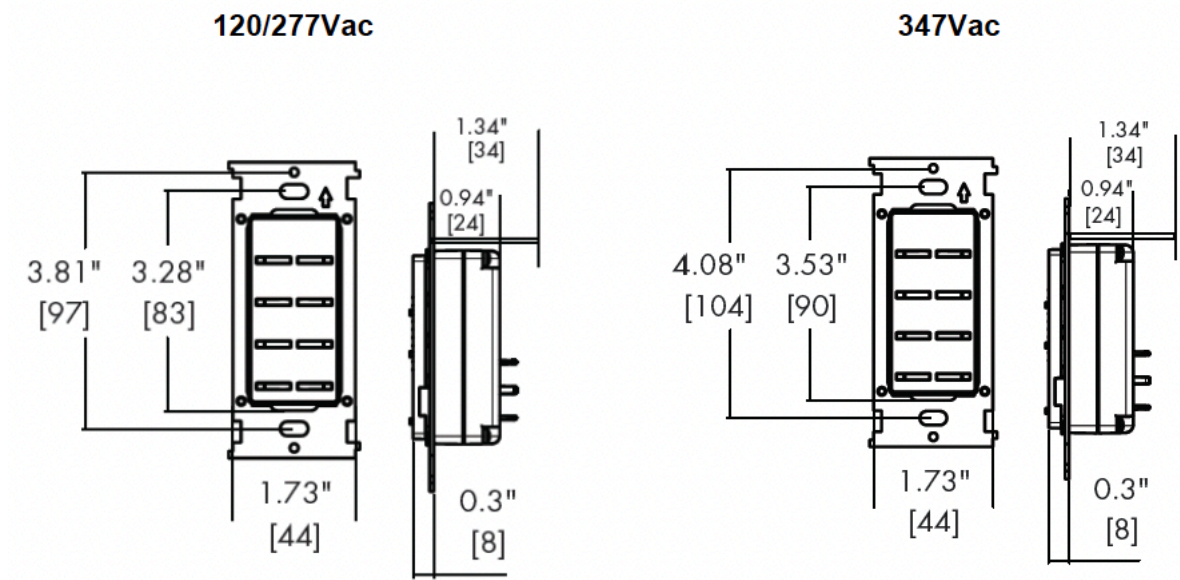

6. Installation Features

- Tinned and stripped, colour coded wires (Black – Line, White – Neutral, Green – Ground)
- Mounts into listed standard wall station gang box
- Bluetooth enabled for wireless fixture control and wireless mesh networking
- Switches can be used with Decora style switch covers

7. Installation/Wiring/Commissioning


CAUTION



Risk of Electric Shock. All servicing should be performed by qualified service personnel. To reduce the risks of electric shock disconnect power connections before servicing.

- For Installation with field-installed conductors of 60°C (140°F) minimum rating
- Mounts into the appropriately sized 120/277VAC or 347VAC wall station gang box – see dimension diagram
- Install device into position
- Connect wires as shown on diagram (14AWG)
- Download free smartphone Commissioning App
- Use Commissioning App to configure system

Side View

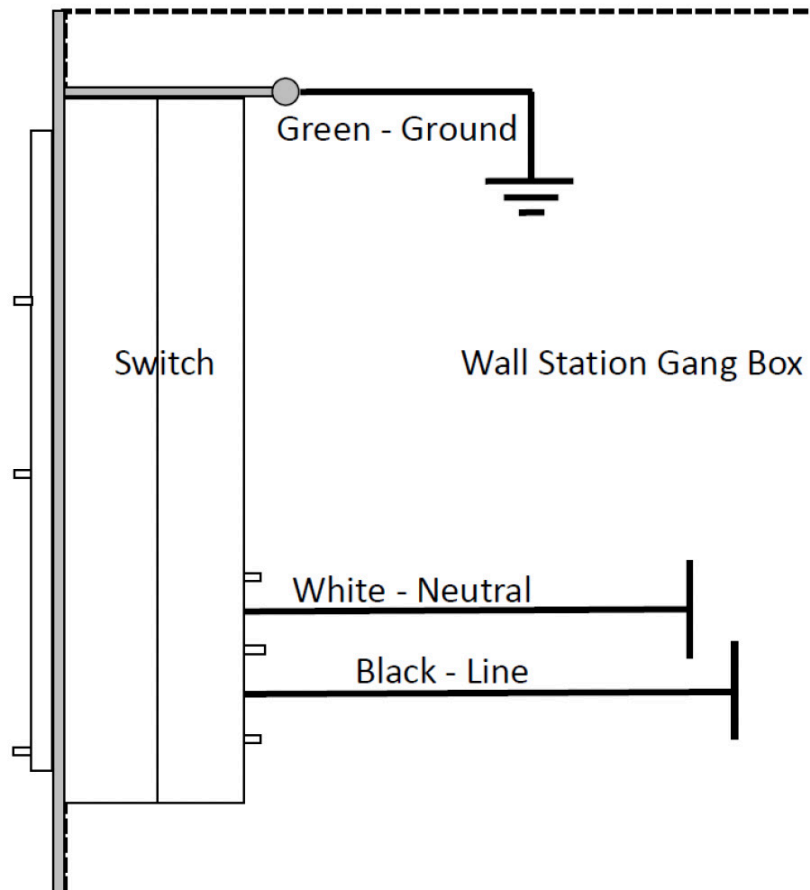

**This page intentionally
blank.**



universal douglas

*It's **EASY**
to **REACH US...***



DOUGLAS LIGHTING CONTROLS

toll free: 1-877-873-2797

techsupport@universaldouglas.com

www.universaldouglas.com

UNIVERSAL LIGHTING TECHNOLOGIES, INC.

toll free: 1-800-225-5278

tes@universaldouglas.com

www.universaldouglas.com

Dialog® is a Registered Trademark of Douglas Lighting Controls. January 2017 – Subject to change without notice.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks is under license.
Other trademarks and trade names are those of their respective owners.

Rev. 7/14/22