

Instruction Manual Smart Switch Module Model:WM-104-M

Wi-Fi

English

WORKS WITH alexa

WORKS WITH Google Assistant

2. With two 2/3 Way switches

3. With Wall Socket

5. Click "Done" to enter the device page to enjoy your smart life with home automation.

How to achieve multi-control association (only for N+L wire)

Note: Please confirm you have successfully finished the last method above for adding this switch to your MOES App before the association.

1. Add another smart switch to the same MOES App. (If there is a smart switch having been added before to the app, just go to next step.)

Note: If your switch requires a neutral wire, then there is no need to wire the new added switch to the light, only L and N are required for wiring. Then you can control 1 light with multiple switches in MOES App.

If your switch doesn't requires a neutral wire, you need to follow the wiring instructions to connect the L and N. At this point you can control the lights simultaneously with multiple switches.

2. Then you will see two devices in the app and click the main switch (as one gang switch as below) by entering into the next operation.

6. After successfully logging into your account, you need to give Alexa 20 seconds to search for devices.

Once the device is successfully discovered, your MOES application is now paired with Alexa. Clicking "x" will display all available devices in your APP, and now you can control smart devices through Alexa.

3. How to connect Smart Device to Google Home

1. Launch the Google Home App and make sure Google Home speaker is installed. If not, please follow Google Home speaker installation instruction to complete the installation.

2. Open the Google Home app and click on the plus sign in the top corner to enter the "add and manage" page, then click on "Set up device".

Global Information

Global Information Operation Whenever & Wherever You are, All-in-one Mobile APP

Step 1

Turn off the circuit breaker and use the electrical tester to test the power.

Ensure the circuit breaker is off before wiring.

Attention: Please disconnect the power supply before connecting the wires to the switch module. The color of your wire may be different from the color shown on the manual.

House local operation

FAQ

What should I do if I can't configure the switch module?

- Please check whether device is powered on.
- Make sure your mobile and switch module are under the same 2.4 GHz WiFi network.
- Whether it's in good internet conditions.
- Make sure the password entered in App is correct.
- Make sure the wiring is correct.

Q2: What device can be connected to this WiFi switch module?

Most of your household electrical appliances can be, such as lamps, laundry machine, coffee maker, etc.

Q3: What happens if the WIFI goes off?

You can still control the device connected the switch module with your traditional switch and once WIFI is active again the device connected to module will connect automatically to your WIFI network.

Q4: What should I do if I change the WIFI network or change the password?

You have to re-connect our WIFI switch module to the new WIFI network according to the App User Manual.

4. Choose the switch that you want to associate to and then choose the switch button that you want to control the same light. Then go back to previous page you will see two item in the page is you 'main switch', the other is the one you associate just now.

Note: Please confirm the associated switch is enabled.

3. Click "x" in the upper right corner and choose "Multi-Control Association, and then click "+" in the right corner.

5. Now you are able to control your light with two switches.

Do not associate another button in the same switch for multi-control.

SERVICE

Thank you for your trust and support to our products, we will provide you with a two-year worry-free after-sales service (freight is not included, please do not alter this warranty service card, but you may sign your name and interests. If you need service or have any questions, please consult the distributor or contact us).

Product quality problems occur within 24 months from the date of receipt, please prepare the product and the packaging, applying for after-sales maintenance in the site or store where you purchase; if the product is damaged due to personal reasons, a certain amount of maintenance fee shall be charged for repair.

The right to refuse to provide warranty service if:

- Products with damaged appearance, missing LOGO or beyond the service term.
- Products that are disassembled, injured, privately repaired, modified or have missing parts.
- The circuit is burned or the data cable or power interface is damaged.
- Products damaged by foreign matter intrusion (including but not limited to various forms of fluid, sand, dust, etc.).

RECYCLING INFORMATION

WEEE Directive 2012/19 / EU must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities.

Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

Step 2

Remove the old switch

Step 3

Remove the switch and pull it away from the wall. Identify Line/Load Wire (Note: The color of your wire may be different from the color shown on the manual.)

Very power is on! This power wire can remove the fuse/cable from the cut switch and this power wire can be connected to the neutral wire. There is no voltage in the wire. You may safely turn off and open the cut circuit breaker.

Download the MOES APP

1. Download MOES App on App store or scan the QR code

MOES App is upgraded as much more compatibility with your Smart Switch Life App, functional well for scenarios controlled by Siri, widget and some recommendations as the fully new customized service. (Note: "I use Smart Switch Life App still works, but MOES App is highly recommended")

2. Registration or Log in

Download "MOES" Application - Enter the Register/Login interface, tap the "I am a new user" button to create an account by entering your phone number to verify your account and "Set password". Choose "Log in" if you already have a MOES account.

Smart Device Linked Voice Speaker

- Complete product networking configuration in the App. Complete the device's networking configuration according to the prompts in the App. Note: in the App, change the name of the device to an easily identifiable name such as Alexa, names are usually in English, such as "bed light".
- How to connect Smart Switch to Amazon Alexa
- Launch MOES App, sign into your account and make sure Smart Device is on the device list.
- Minimize MOES App, then launch the Alexa App and sign in your Alexa account and make sure you have at least one Alexa smart speaker-controlled device installed like Echo dot, etc.
- In the Bottom right corner of Home page, press the button to show APP Menu. Then select "link with alexa in the menu."

WARRANTY CARD

Product Information

Product Name: _____
Product Type: _____
Purchase Date: _____
Warranty Period: _____
Dealer Information: _____
Customer's Name: _____
Customer Phone: _____
Customer Address: _____

Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

TECHNICAL SPECIFICATIONS

Model	WM-104-M
Product Type	Smart Switch Module
Voltage	80-250V AC 50/60Hz
Current	10A/Gang/Total 10A
Wireless Protocol	Wi-Fi, BLE
Operation Temp.	-10°C ~ 45°C
Case Temp.	Tc: 40°C ~ 60°C
Operation Range	< 70 m
Dim. (WxHxD)	44x40x18 mm
IP Rating	IP20

WIRING DIAGRAM

1Gang Smart Switch Module

1. With one 1 Gang switch

3. Enter Wi-Fi Password and click "Next", waiting for completing the connection.

4. Select the device you want to add click "+".

Add the device successfully, you can edit the name of the device to make the device page by click "Done".

6. After successfully logging into your account, you need to give Alexa 20 seconds to search for devices.

Once the device is successfully discovered, your MOES application is now paired with Alexa. Clicking "x" will display all available devices in your APP, and now you can control smart devices through Alexa.

3. How to connect Smart Device to Google Home

1. Launch the Google Home App and make sure Google Home speaker is installed. If not, please follow Google Home speaker installation instruction to complete the installation.

2. Open the Google Home app and click on the plus sign in the top corner to enter the "add and manage" page, then click on "Set up device".

EVATOST CONSULTING LTD

Address: Suite 11, First Floor, My Road
Business Centre, Taffs Well, Cardiff, Wales, CF15 7JN
Tel: +44-292-1060605
Email: contact@evatost.com

ANZALAB GmbH

Lehrhofstr 23, 45326 Essen
Made in China

Manufacturer: WENZHOU NOVA NEW ENERGY CO., LTD

Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang China
Tel: +86-577-57188815
After-sale Service: service@moeshouse.com

[illegible]

Manuel de l'utilisateur (Français)

Étape 1

- Retirez l'interrupteur et dégagez-le du mur. Identifiez le fil de ligne/courant (le bouton de votre fil peut être différent de celui indiqué dans le manuel).

Attention :

- Ne touchez pas l'alimentation électrique avant d'installer ou de retirer l'appareil afin d'éviter des dommages irréversibles dus au courant électrique ou des problèmes imprévisibles tels que le déclenchement du incendie.

Étape 2

- Retirez l'ancien interrupteur.

Figure 1

Module d'interrupteur intelligent 1 Gang

1. Avec un interrupteur 1 Gang

SCHEMA DE CÂBLAGE

Module d'interrupteur intelligent 1Gang

1. Avec un interrupteur 1 Gang

Figure 2

Télécharger l'application MOES

1 Téléchargez l'application MOES sur l'App store ou scannez le code QR

L'application MOES est beaucoup plus compatible que l'application Tuya Smart/Life/Life, elle fonctionne bien pour les scènes contrôlées par Siri, les widgets et les recommandations de scènes en tant que service personnalisé entièrement nouveau.

(Note : L'application Tuya Smart/Life/Life fonctionne également, mais l'application MOES est l'application recommandée)

2 S'inscrire ou se connecter.

«Téléchargez l'application "MOES"»
→ Entrez dans l'interface d'inscription/connexion, cliquez sur "Inscription" pour créer un compte en entrant votre numéro de téléphone pour obtenir la validation et "Connexion" si vous avez déjà un compte MOES.

3 Méthode de liaison Wi-Fi (deux méthodes d'accouplement)

- Assurez-vous que votre téléphone est connecté au Wi-Fi et au Bluetooth.
- Ouvrez l'application MOES/Life et cliquez sur "+", puis la page d'invite s'affichera automatiquement à l'écran. Cliquez sur "Ajouter".
- Entrez le mot de passe Wi-Fi et cliquez sur "Sulver", en attendant la fin de la connexion.
- Sélectionnez l'appareil que vous souhaitez ajouter et cliquez sur "+".

L'état de l'appareil a réussi, vous pouvez modifier le nom de l'appareil pour accéder à la page de l'appareil en cliquant sur "Terminer".

Figure 3

Manuale di istruzioni (Italiano)

Passo 1

- Scegliere l'interruttore automatico e utilizzare il tester elettrico per verificare l'alimentazione.
- Assicurarsi che l'interruttore automatico sia spento prima di effettuare il cablaggio.

Attenzione:

- Non toccare l'alimentazione elettrica prima di rimuovere il vecchio interruttore, scegliere l'alimentazione per evitare danni irreversibili al dispositivo. Assicurarsi che il cordoncino elettrico sia ben protetto e non si aggrovigli.

Passo 2

- Rimuovere il vecchio interruttore.

Figure 1

Modulo interruttore intelligente 1Gang

2. Con due interruttori a 2/3 vie

SCHEMA ELETTRICO

Modulo interruttore intelligente 1Gang

1. Con un interruttore a 1 canale

Figure 2

Scarica l'APP MOES

1 Scarica l'application MOES/Life sur App Store o scansiona il codice QR

L'app MOES/Life est plus compatible que l'application Tuya Smart/Life/Life, elle fonctionne bien pour les scènes contrôlées par Siri, les widgets et les recommandations de scènes en tant que service personnalisé entièrement nouveau.

(Note : L'application Tuya Smart/Life/Life fonctionne également, mais l'application MOES/Life est l'application recommandée)

2 Registration et accès.

«Téléchargez l'application "MOES"»
→ Accédez à l'interface d'inscription/connexion, cliquez sur "Inscription" pour créer un compte en entrant votre numéro de téléphone pour obtenir la validation et "Connexion" si vous avez déjà un compte MOES/Life.

3 Méthode de collage Wi-Fi (deux méthodes d'accouplement)

- Assurez-vous que le téléphone soit connecté au Wi-Fi et au Bluetooth.
- Ouvrez l'application MOES/Life et cliquez sur "+", puis la page de demande sera visualisée automatiquement sur l'écran. Cliquez sur "Ajouter".
- Entrez le mot de passe Wi-Fi et cliquez sur "Ajouter", en attendant la fin de la connexion.
- Sélectionnez l'appareil que vous souhaitez ajouter et cliquez sur "+".

Le dispositif vient d'être ajouté avec succès, il est possible de modifier le nom de l'appareil en cliquant sur la page de l'appareil.

Figure 3

5. Cliquez sur "Terminer" pour accéder à la page de l'appareil et profiter de votre vie intelligente grâce à la domotique.

Figure 4

5. Fare clic su "Fine" per accedere alla pagina del dispositivo e godersi la vita intelligente con la domotica.

Figure 4

Manual de Instruções (Português)

Etapa 1

- Desligar o interruptor e utilizar o testador eléctrico para testar a energia.
- Carregar-se de que o disjuntor está desligado antes da cablagem.

Atenção:

Antes de qualquer intervenção, desligar o interruptor antes de testar ou mesmo o dispositivo para evitar danos materiais ou lesões pessoais. Não tocar em partes energizadas, tais como interruptores de energia.


Etapa 2

- Retirar o interruptor antigo




Diagrama de Fiação


1Gang Smart Switch Module

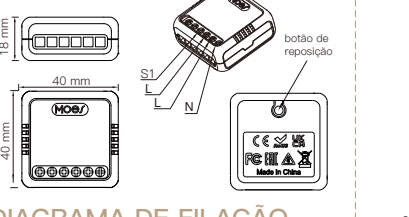

2. Com dois interruptores de 2/3 vias



3. Com tomada de parede



Descarregar o APP MOES

1 Descarregar a aplicação MOES na App Store ou digitalizar o código QR



MOES App é atualizado com muito mais compatibilidade do que o Tuya Smart/Smart Life app, funcionando bem para a casa controlada por Siri, widget e recomendações de casa como o serviço totalmente novo personalizado.

Nota: A aplicação Tuya Smart/Smart Life ainda funciona, mas a aplicação MOES é altamente recomendada.

2 Registo ou Entrar.

- Descarregar a aplicação "MOES".
- Introduza a interface.
- Registo/login, toque em "Registrar" para criar uma conta introduzindo o número de telefone para obter o código de verificação e "Tel" (password). Escolha "Entrar" se já tiver uma conta MOES.

Método de ligação Wi-Fi (dos métodos de emparelhamento)

1. Certifique-se de que o seu telefone está ligado a Wi-Fi e Bluetooth.

2. Abra MOES/Tuya App e clique em "+", depois a página de solicitação será automaticamente mostrada no ecrã. Clique em "Add".

3. Clique em "Done" (Concluído) para aceder à página do dispositivo e desfrutar da sua vida inteligente com a domótica.

3. Enter Wi-Fi Password and click on "Next" as espera de completar a ligação.

4. Seleccione o dispositivo que deseja adicionar e clique em "+".

5. Adicione o dispositivo com sucesso, vá editar o nome do dispositivo para entrar na página do dispositivo clicando em "Edit".

Руководство по эксплуатации (Русский язык)

Шаг 1

- Выключите автоматический выключатель и проверьте наличие напряжения тестером.
- Перед подключением убедитесь, что автоматический выключатель выключен.

Внимание:

Во избежание повреждения проводки и оборудования перед началом работ убедитесь, что автоматический выключатель выключен. Не прикасайтесь к оголенным частям проводов. Если вы не уверены в своих силах, обратитесь к квалифицированному специалисту.

Шаг 2

- Снимите старый выключатель






Схема подключения


Модуль интеллектуального выключателя 1Gang

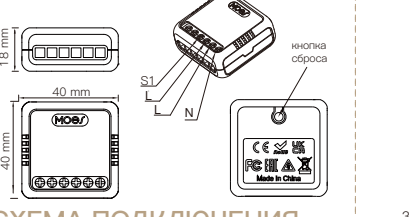

2. С двумя 2/3-ходовыми переключателями




3. С настенной розеткой



Скачать приложение MOES APP

1 Загрузите приложение MOES в App store или отсканируйте QR-код



Приложение MOES имеет более высокую совместимость, чем приложения Tuya Smart/Smart Life, функционирующие в вашей системе. MOES работает стабильно и поддерживает работу с Siri, виджеты и рекомендации по дому, как и полностью новый персонализированный сервис.

Примечание: Приложение Tuya Smart/Smart Life все еще работает, но настоятельно рекомендуем приложение MOES.

2 Регистрации или вход.

- Загрузите приложение "MOES".
- Введите в интерфейс.
- Регистрация/вход, нажмите "Зарегистрироваться", чтобы создать учетную запись, введя номер телефона для получения кода проверки и "Пароль" (пароль). Выберите "Войти", если у вас уже есть учетная запись MOES.

Метод соединения Wi-Fi (два метода сопряжения)

1. Убедитесь, что ваш телефон подключен к Wi-Fi и Bluetooth.

2. Откройте приложение MOES/Tuya и нажмите "+", после чего на экране автоматически появится страница загрузки. Нажмите "Добавить".

3. Введите пароль Wi-Fi и нажмите "Далее".

4. Выберите устройство, которое вы хотите добавить и нажмите "+".

5. Нажмите "Готово", чтобы войти на страницу устройства и наслаждаться умной жизнью с домашней автоматикой.

5. Нажмите "Готово", чтобы войти на страницу устройства и наслаждаться умной жизнью с домашней автоматикой.