

T2

T2






MANUFACTURER
Shenzhen SoundSOUL Information Technology Company Limited
Room 1308-1309, Building B, Huihai Square, Chuangye Road,
Longhua District, Shenzhen, China, 518109
support@soundpeatsaudio.com
www.soundpeatsaudio.com

FC RoHS CE E E 018-210003

FCC ID: 2AFTU-DD016 MADE IN CHINA

USER MANUAL | Manuel d'Utilisation | Bedienungsanleitung |
Manual de Instrucciones | Manuale di istruzioni | 取扱説明書 | 说明书


Package Content



Specifications

Bluetooth Version	5.1
Maximum Working Range	10m
Working Time	About 10 hours
Charging Time For Earbuds	About 2 hours
Charging Time For Charging Case	About 2 hours
Charging Case Recharge Earbuds	Twice
Dimension(L*W*H)	21.4*21.7*27.7mm (earbuds)

Product Diagram

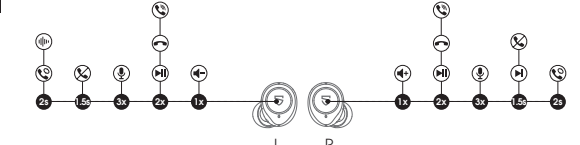


Controls

Power On	Automatically: Open the charging case Manually: Long press the multifunctional button for 1.5s
Power off	Automatically: Place the earbuds back into the charging docks and close the charging case Manually: Long press the multifunctional button for 10s
Play/Pause	Double click the multifunctional button
Volume-	Click the left button once
Volume+	Click the right button once
Next track	Long press the right button for 1.5s
Answer/Hang Up Phone Call	Double click the multifunctional button
Reject Phone Call	Long press the multifunctional button for 1.5s
Switch Between Two Active Calls	Long press the multifunctional button for 2s
Manually Enter Pairing Mode	Long press the multifunctional button for 6s
Activate Voice Assistant	Triple click the multifunctional button
Smart Note Cancellation	Long press the left button for 2s
Transparency Model	Long press the left button for 2s

Wearing

1. Identify the left and right earbuds.
2. Rotate the earbuds, and adjust to find the best angle.



Getting Started


Pairing and Re-Pairing

1. When the charging case is powered, open the charging case, then both earbuds will enter TWS pairing mode automatically. You will hear a voice prompt when the left and right earbuds connect to each other successfully. After this, the indicator for secondary earbud stays on and indicator for main earbud flashes in blue and white alternately with a voice prompt "Pairing" indicating the earbuds enter pairing mode.

2. "SOUNDPEATS T2" will show up on the Bluetooth list, click it to connect. You will hear a voice prompt "connected" when the earbuds connect with your device successfully.

3. SOUNDPEATS T2 Bluetooth earbuds can remember previously paired devices. When you make the second connection, simply activate the Bluetooth in your device, take out the both earbuds from the charging case. They will connect to each other and reconnect to your device automatically. If the earbud doesn't automatically connect to your device, please activate the Bluetooth in your device and hit "SOUNDPEATS T2" on the Bluetooth list.

4. Mono Mode: After successfully pairing of SOUNDPEATS T2, the left and right earbud can be used separately.

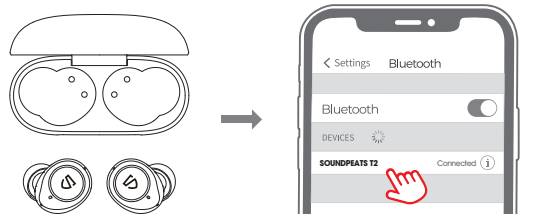

Factory Reset

(Try the following steps if you fail building connection between two earbuds or between Earphones and device)

1. Clear pairing record between the earbuds and all your devices.

2. Place back both earbuds into the charging docks and make sure the earbuds are charging properly. Then click the multifunction buttons of both earbuds 5 times until the LED light of the both earbuds flash blue and white twice indicating reset successfully.

Charge

SOUNDPEATS T2 Bluetooth earphones are equipped with a charging case which can not only charge the earphones, but also a case that is convenient to carry and store the earphones.

Built-in rechargeable battery, can charge two earphones twice.

Charging the headset

The earphones are partially charged at the factory. Please make sure they are fully charged before first use.

1. Put the earphones into corresponding charging docks and make sure the connectors for charging are connected properly.

2. The LED indicator lights up in blue indicating that the earphones start to charging.

Charge the case

When using the charging case to charge and it didn't indicate in blue, please charge the case soon.

1. Connect the charging port with Type-C charging adapter. (Please make sure the current is not greater than 1A) the indicator flashes in white. When the charging case charge until fully status, the LED indicator light will normal on after fully charged.


2. Please charge the case at least once every 3 months when not in use for a long time.

Warranty and Support

We warrant this device 12 MONTHS from date of the original purchase for manufacturer defects.

support@soundpeatsaudio.com
www.soundpeatsaudio.com

For more details, please scan the QR code to check the detailed PDF manually.



https://soundpeatsaudio.com/downloads/

Qualcomm

Qualcomm aptX, Qualcomm TrueWireless and Qualcomm cVc are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm and Qualcomm TrueWireless are trademarks of Qualcomm Incorporated, registered in the United States and other countries.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.