


ADDITIONAL INFORMATION

SALTO DBolt Touch IC






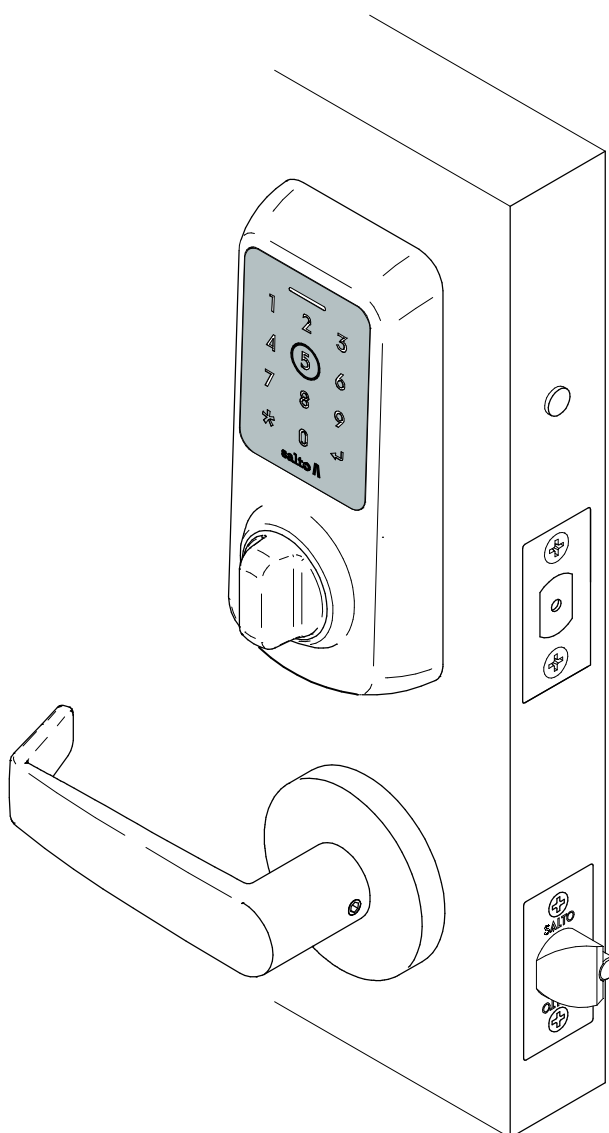


The SALTO DBolt Touch IC is a brand new electronic lock that implements the latest technology and the top level of functionality for multi-family housing and residential markets. The SALTO DBolt Touch offers a retrofit and smart locking solution for upgrading deadbolt mechanical locks in the residential market.

MODEL: ELECTRONIC INFO. DM0M

Copyright © 2025 Salto Systems, S.L.

DMM14xx.. series
DMM15xx.. series

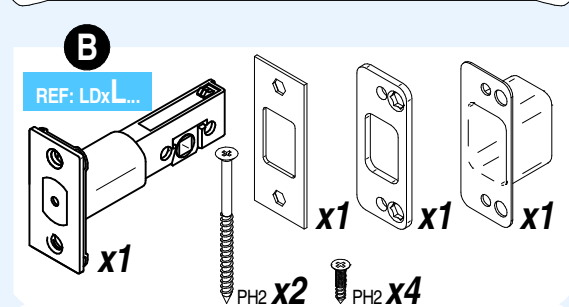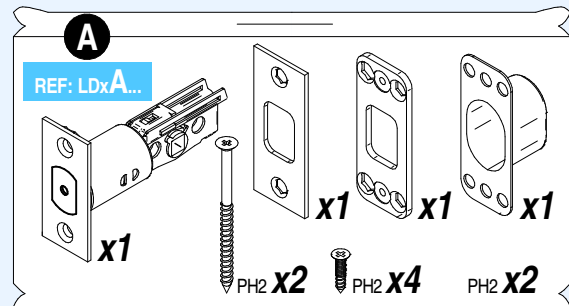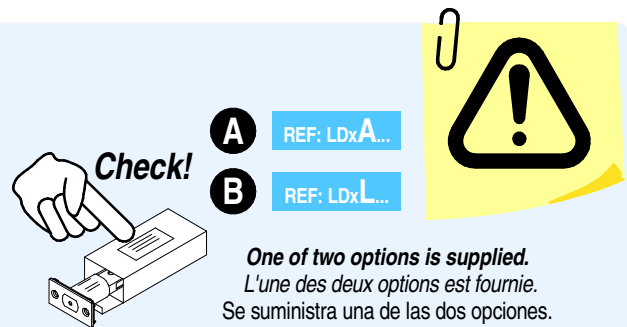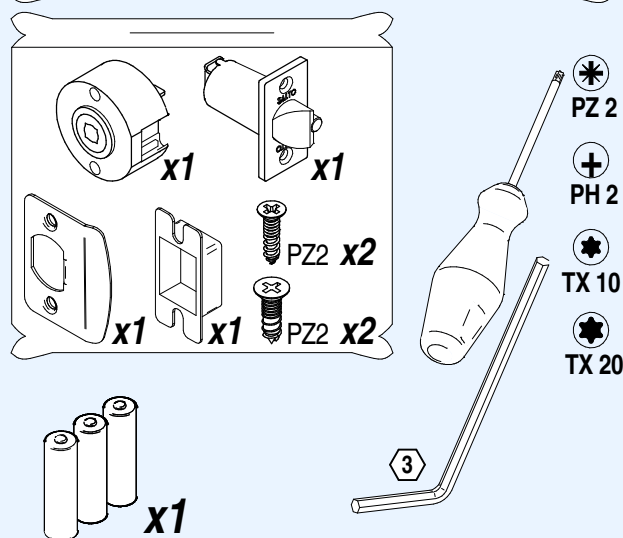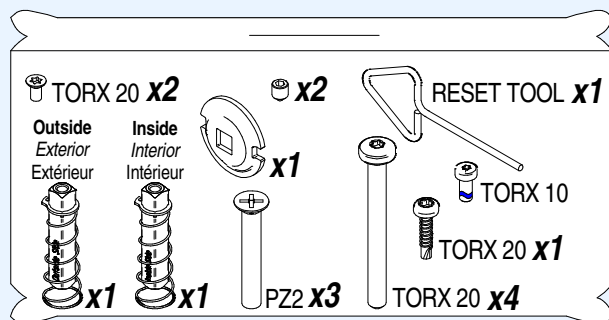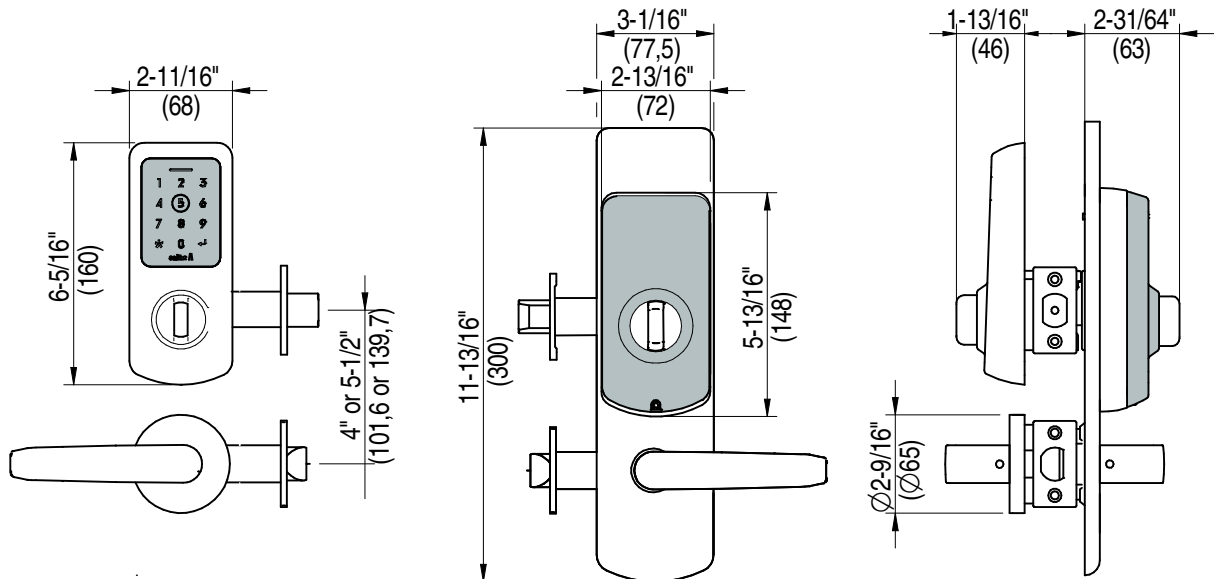



Paired!

The inside and outside esutcheons are paired, and will not work if you switch it in a different inside or outside escutcheon.

Les ensembles plaque-béquilles intérieurs et extérieurs sont appariés et ne fonctionneront pas si jamais ils sont connectés à d'autres ensembles différents.

Los esudos interior y exterior están emparejados, y no funcionarán si los conecta a un escudo interior o exterior diferente.




i

WOOD DOORS
RFDCTW30W01


STEEL DOORS
RFDCTS30W01

Not included!
Non inclus!
¡No incluido!

**CLICK
HERE**

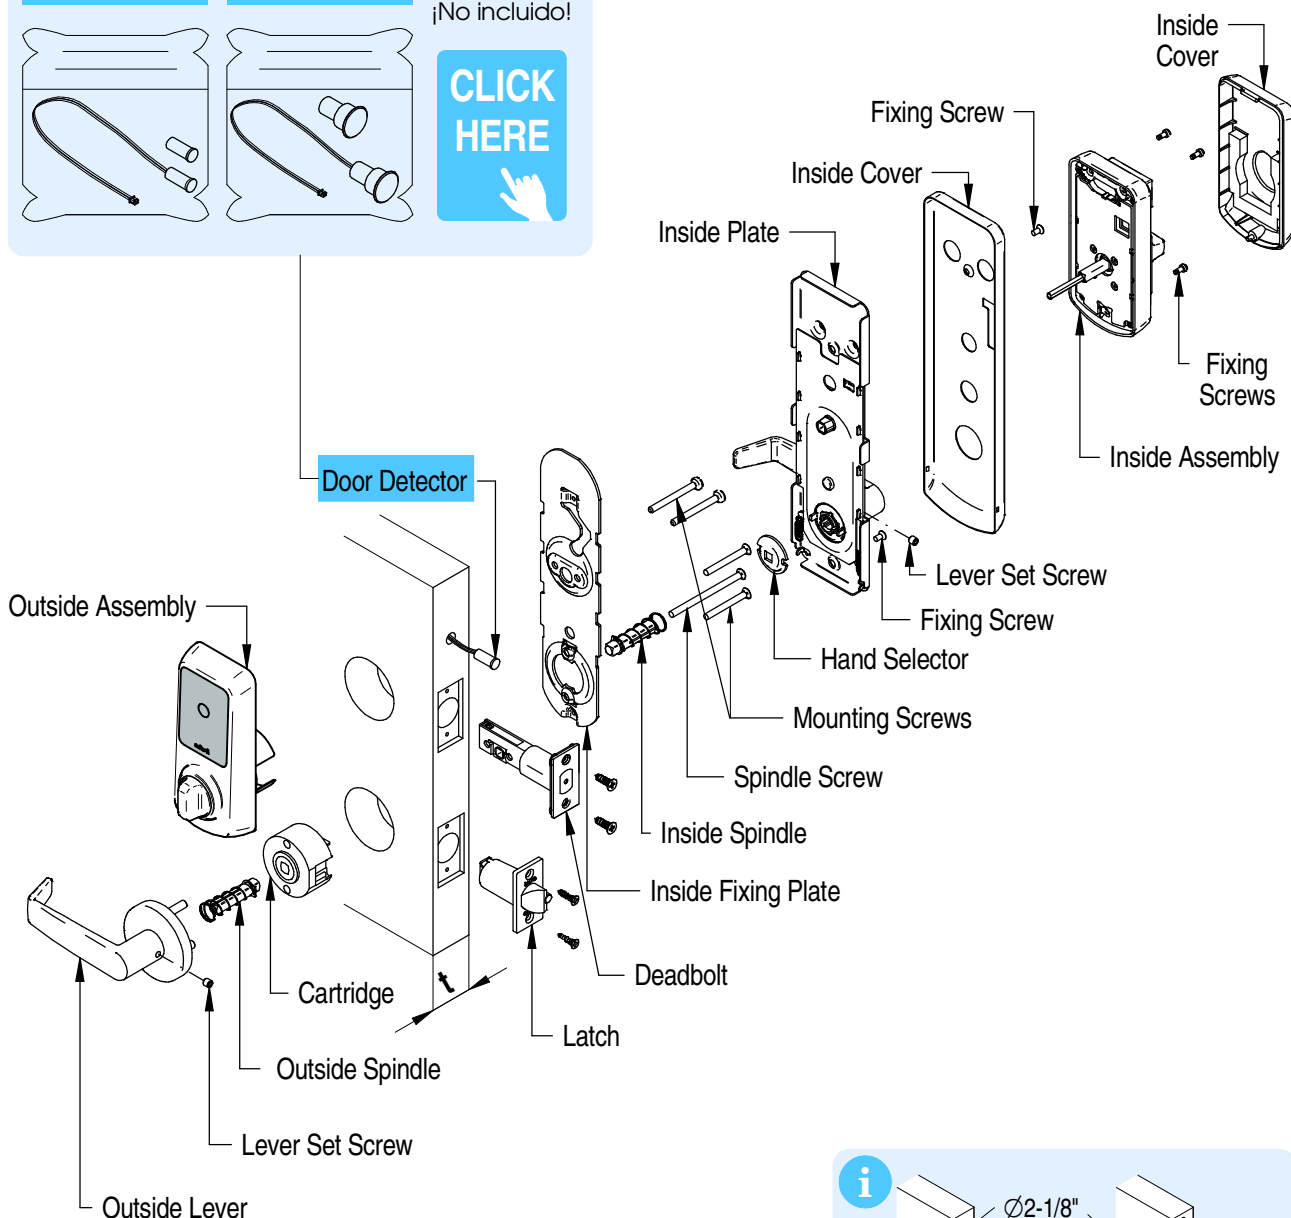

i

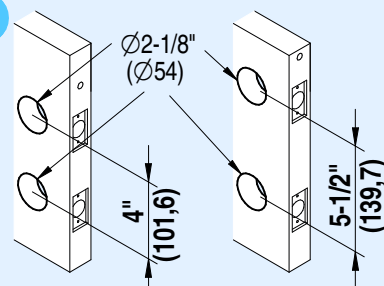

DMM14xx..

DMM15xx..

Eng Installation E Instalación R Installation

1

DOOR

FRAME

REF: LDxL...


REF: LDxA...

PH 2 | REAL SIZE


PH 2 | REAL SIZE

PH 2 | REAL SIZE


2

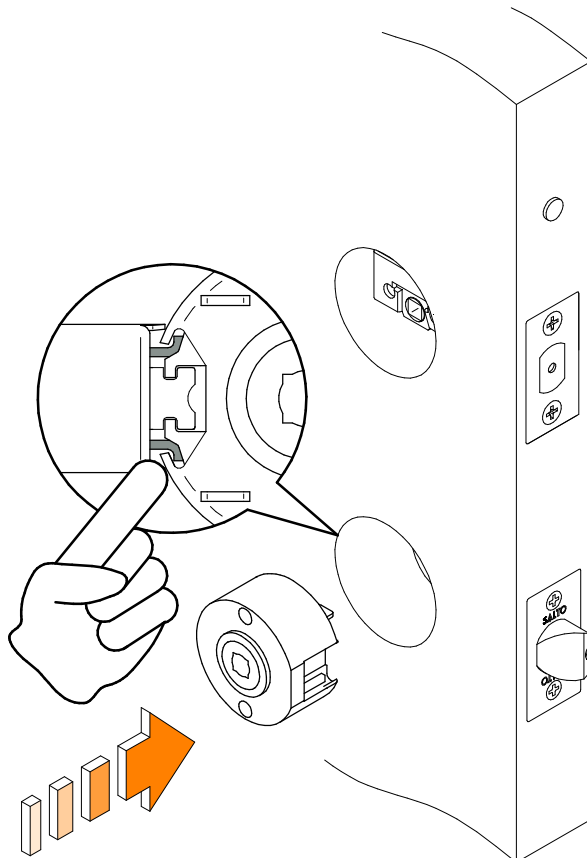

3

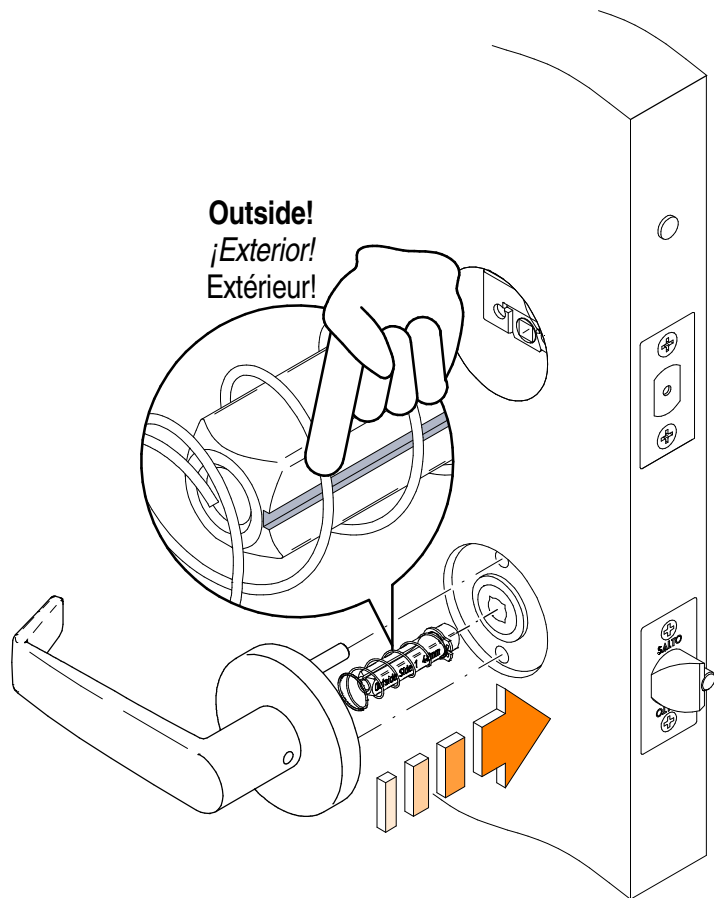


4

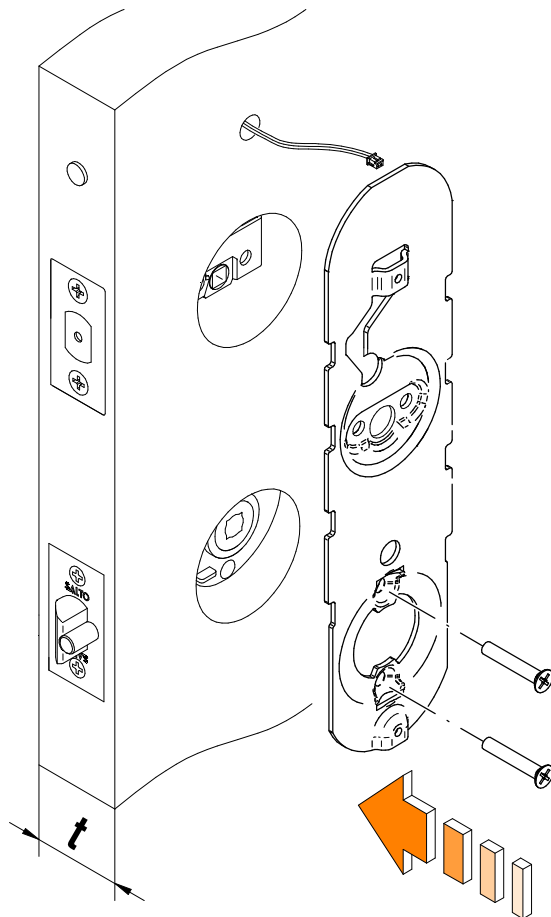

i

t Door thickness	L
1-9/16" - 1-3/4" (40 - 45 mm)	1-9/16" (40 mm)
1-3/4" - 1-31/32" (45 - 50 mm)	
1-31/32" - 2-3/16" (50 - 55 mm)	
2-3/16" - 2-3/8" (55 - 60 mm)	1-31/32" (50 mm)
2-3/8" - 2-9/16" (60 - 65 mm)	
2-9/16" - 2-3/4" (65 - 70 mm)	2-3/8" (60 mm)
2-3/4" - 2-15/16" (70 - 75 mm)	
2-15/16" - 3-5/32" (75 - 80 mm)	2-15/16" (75 mm)
3-5/32" - 3-11/32" (80 - 85 mm)	



5

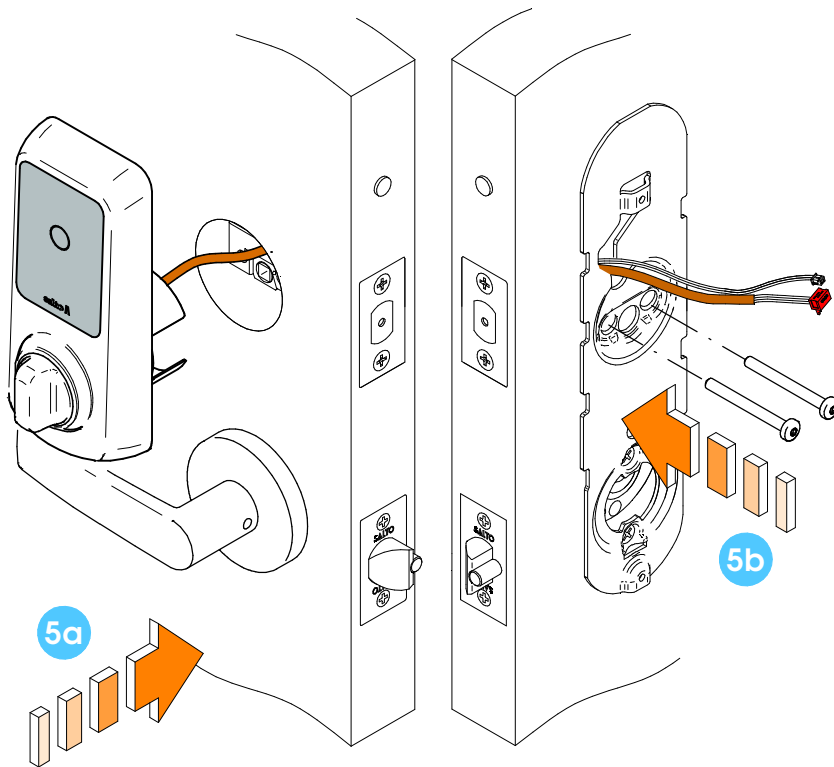


i

t Door thickness	L
1-9/16" - 1-3/4" (40 - 45 mm)	1-31/32" (50 mm)
1-3/4" - 1-31/32" (45 - 50 mm)	2-3/16" (55 mm)
1-31/32" - 2-3/16" (50 - 55 mm)	2-3/8" (60 mm)
2-3/16" - 2-3/8" (55 - 60 mm)	2-9/16" (65 mm)
2-3/8" - 2-9/16" (60 - 65 mm)	2-3/4" (70 mm)
2-9/16" - 2-3/4" (65 - 70 mm)	2-15/16" (75 mm)
2-3/4" - 2-15/16" (70 - 75 mm)	3-5/32" (80 mm)
2-15/16" - 3-5/32" (75 - 80 mm)	3-11/32" (85 mm)
3-5/32" - 3-11/32" (80 - 85 mm)	3-9/16" (90 mm)


6

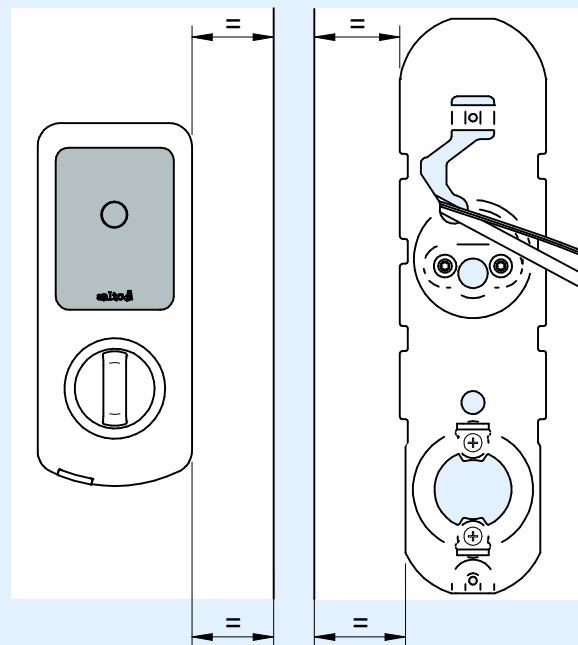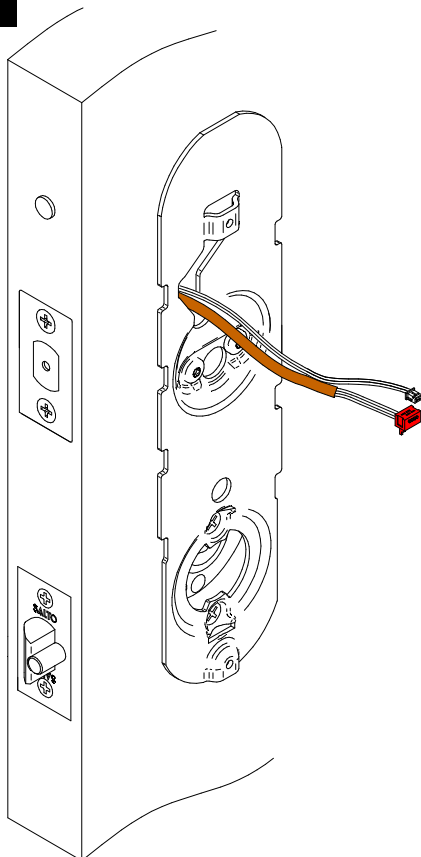


7

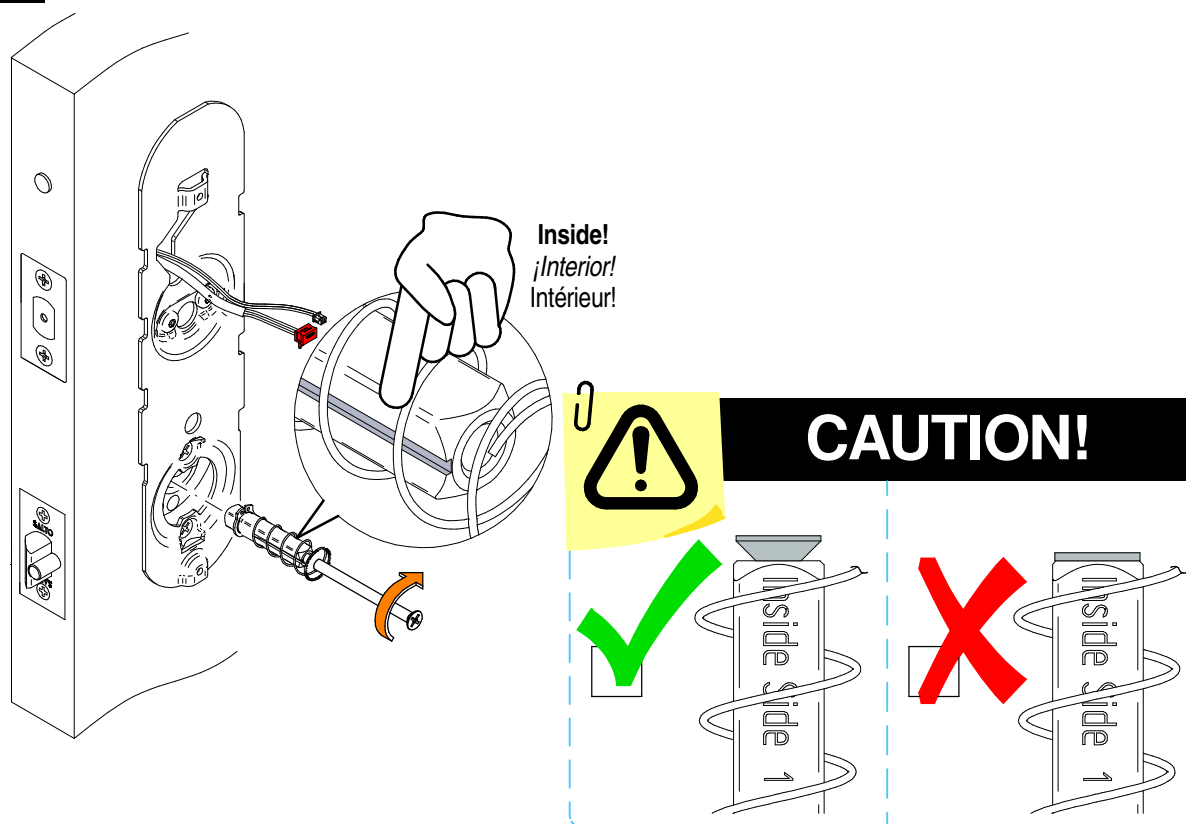


8

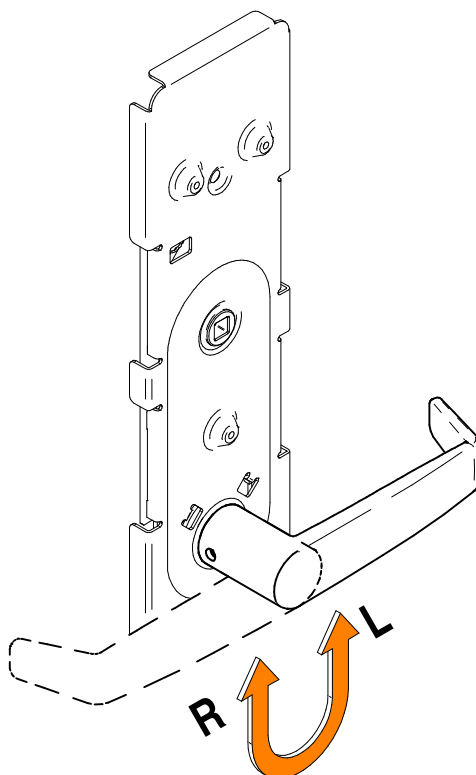



9

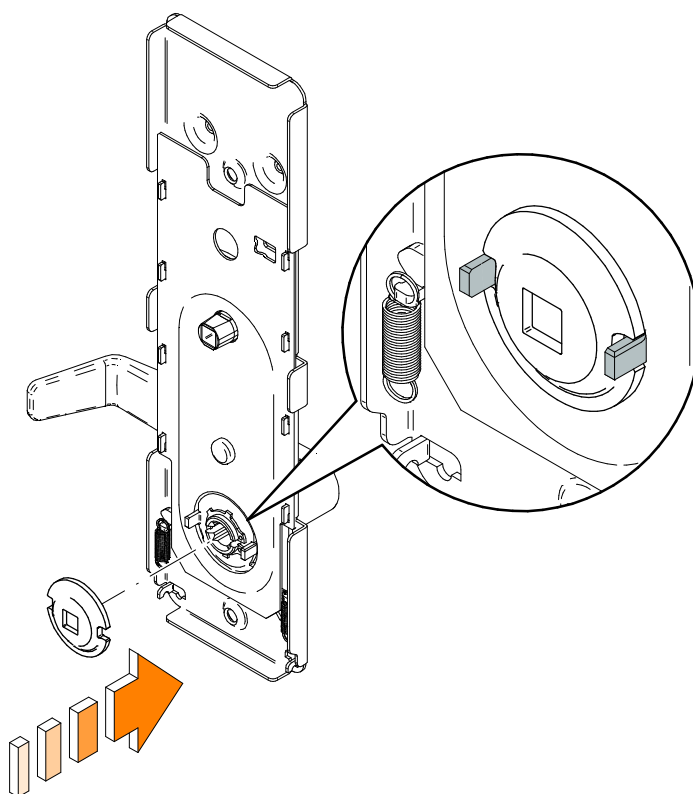


10

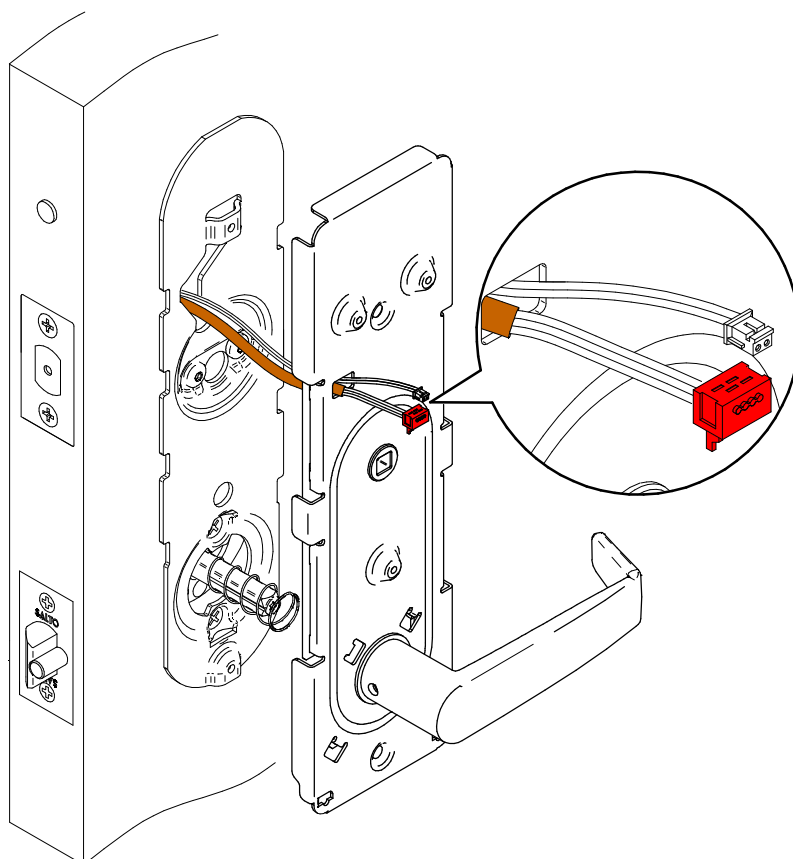


11

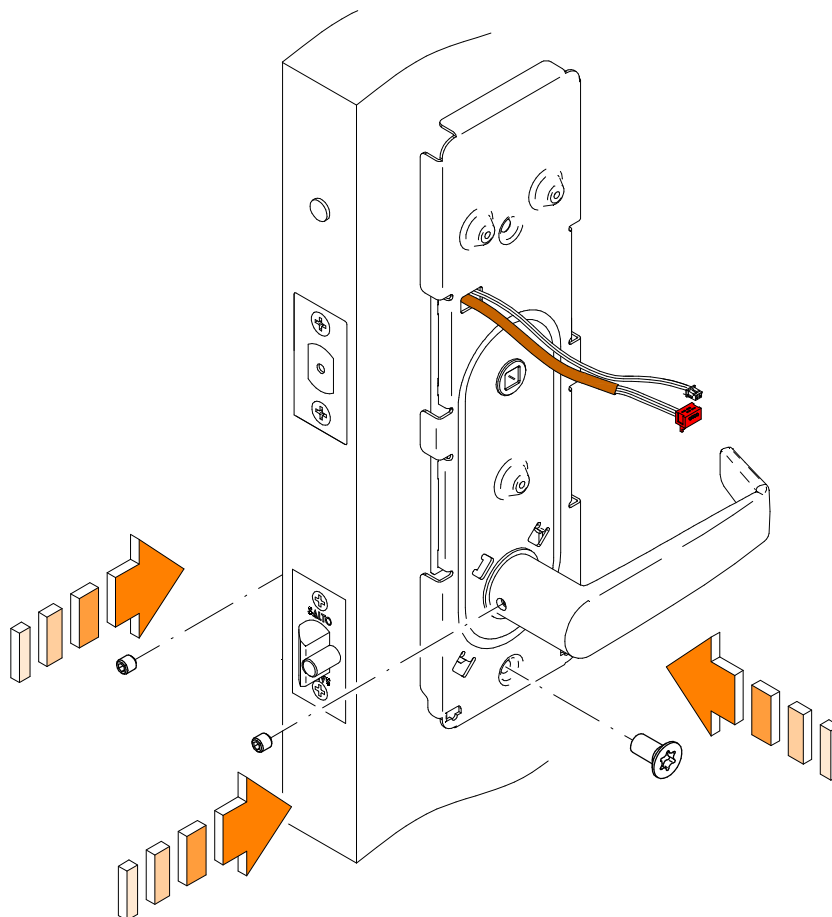



12

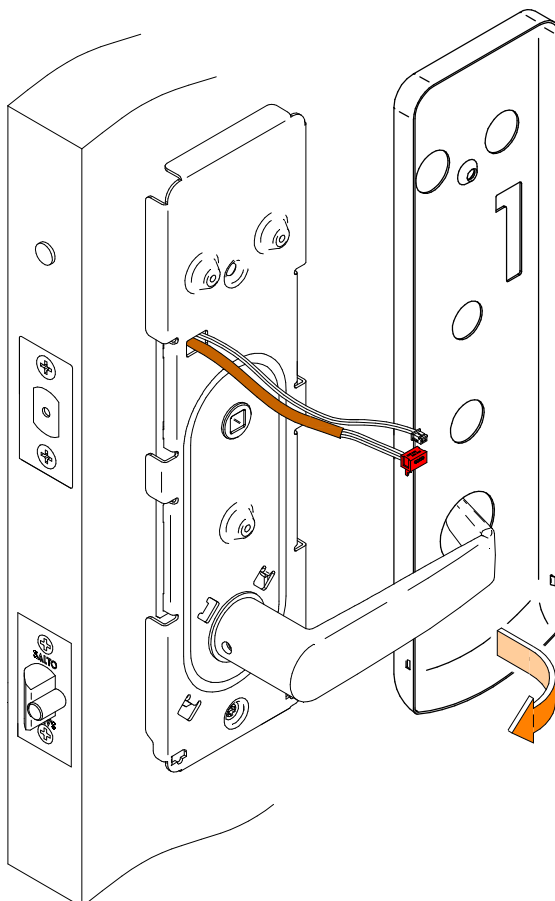


13

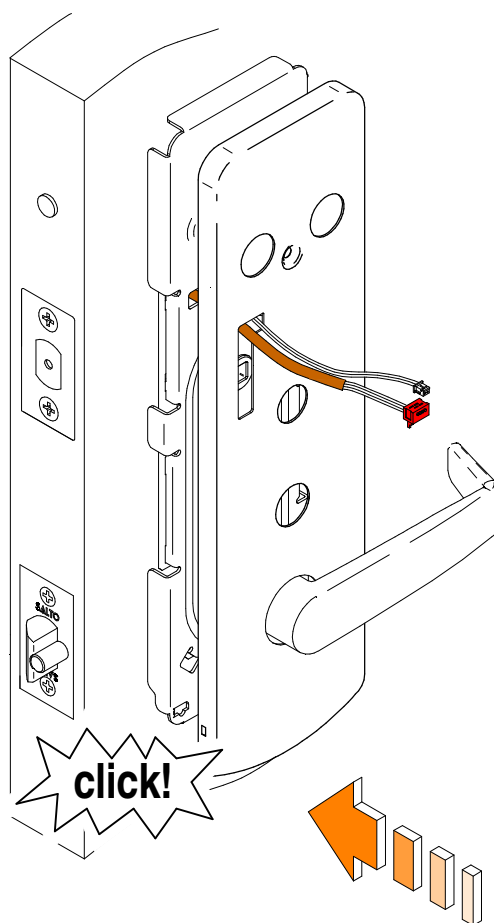


14

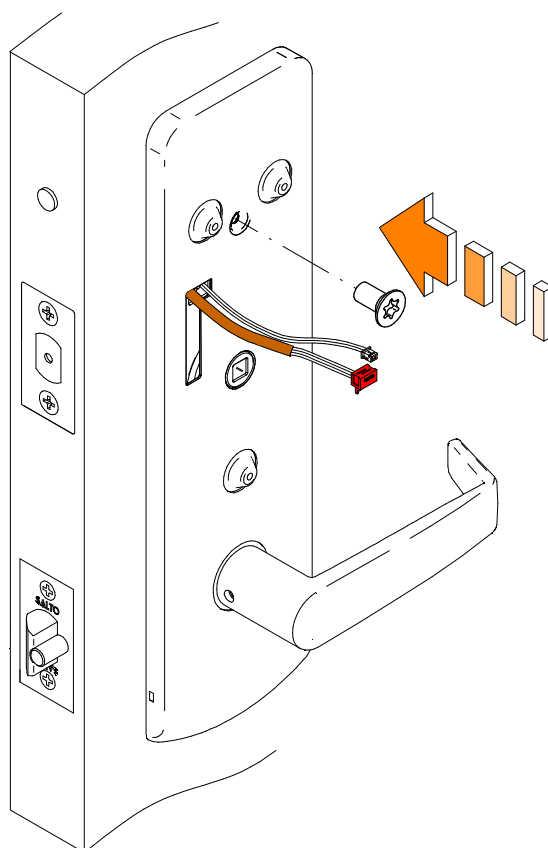


15

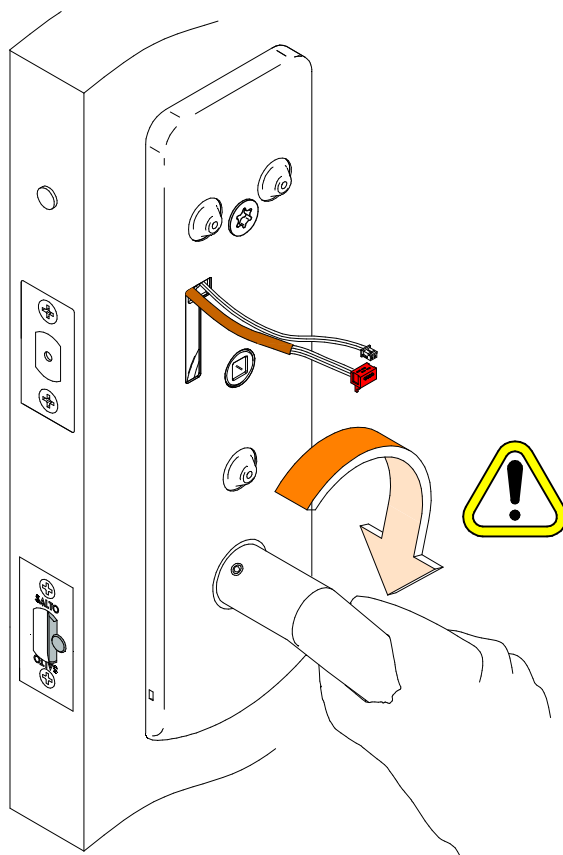


16

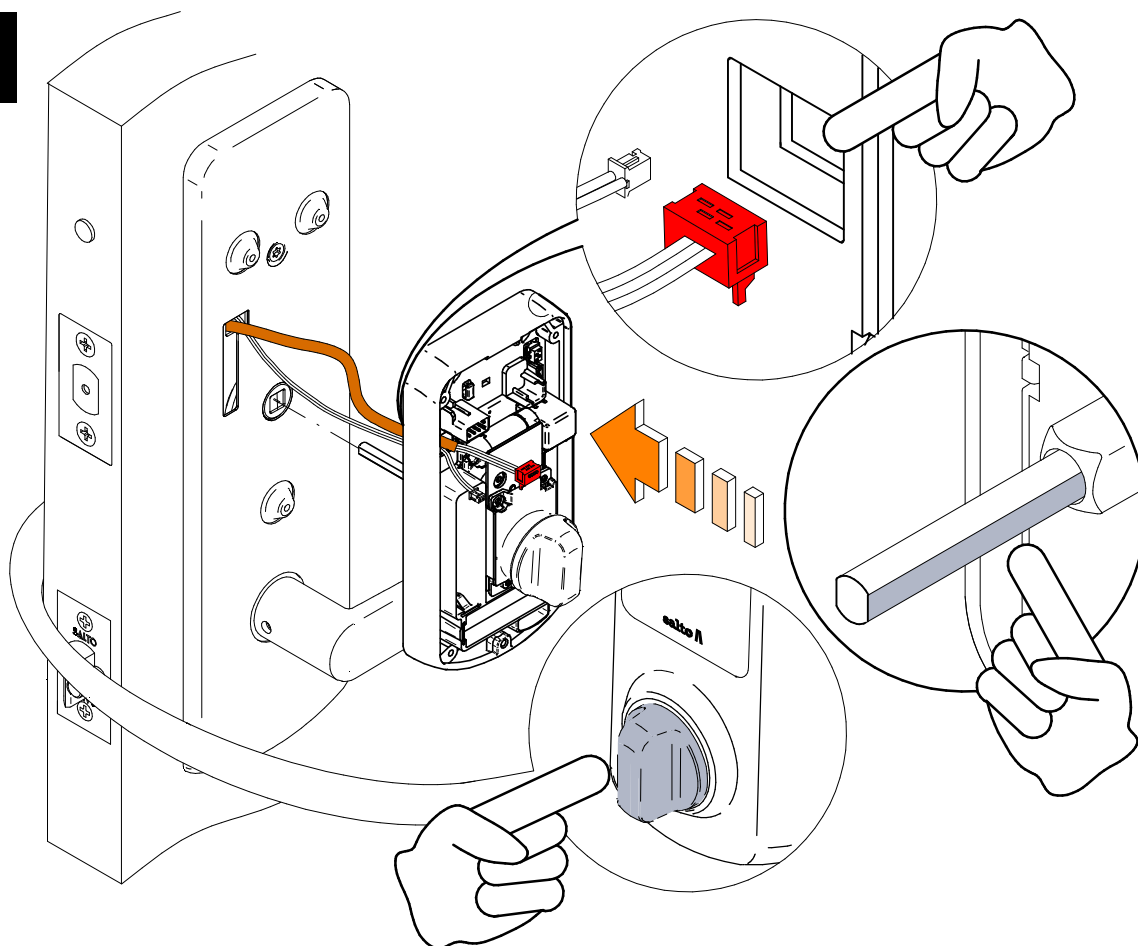


17

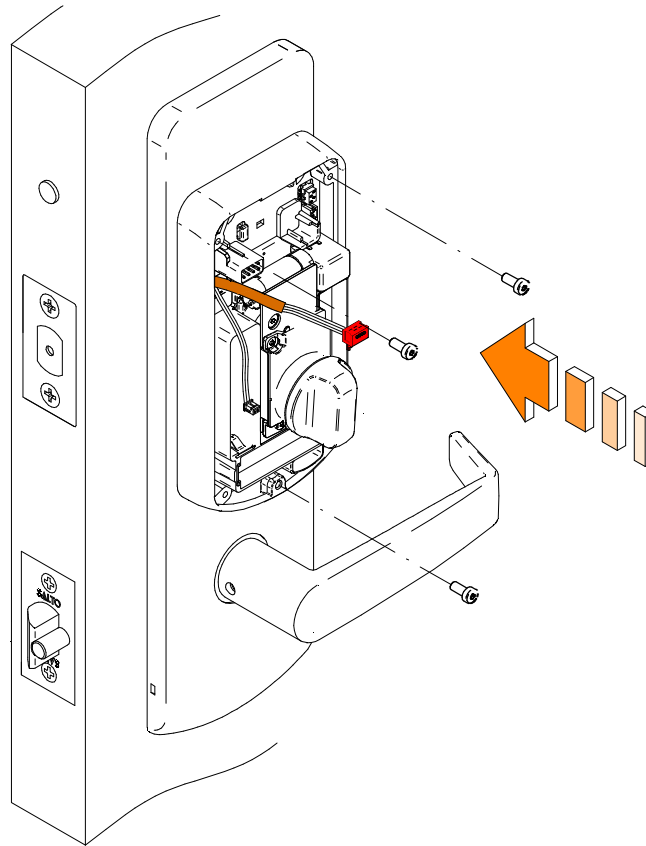

18

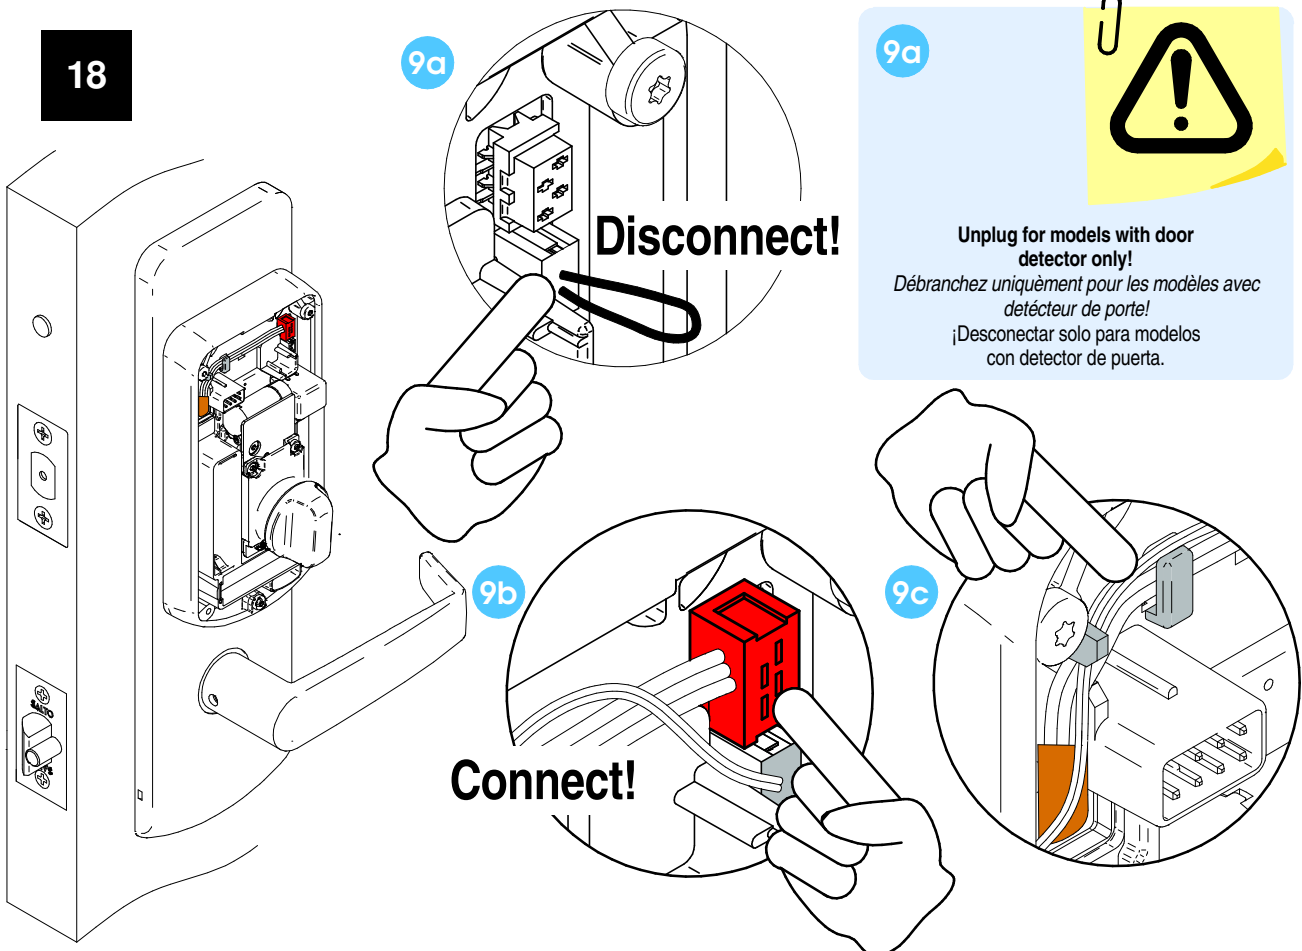


19

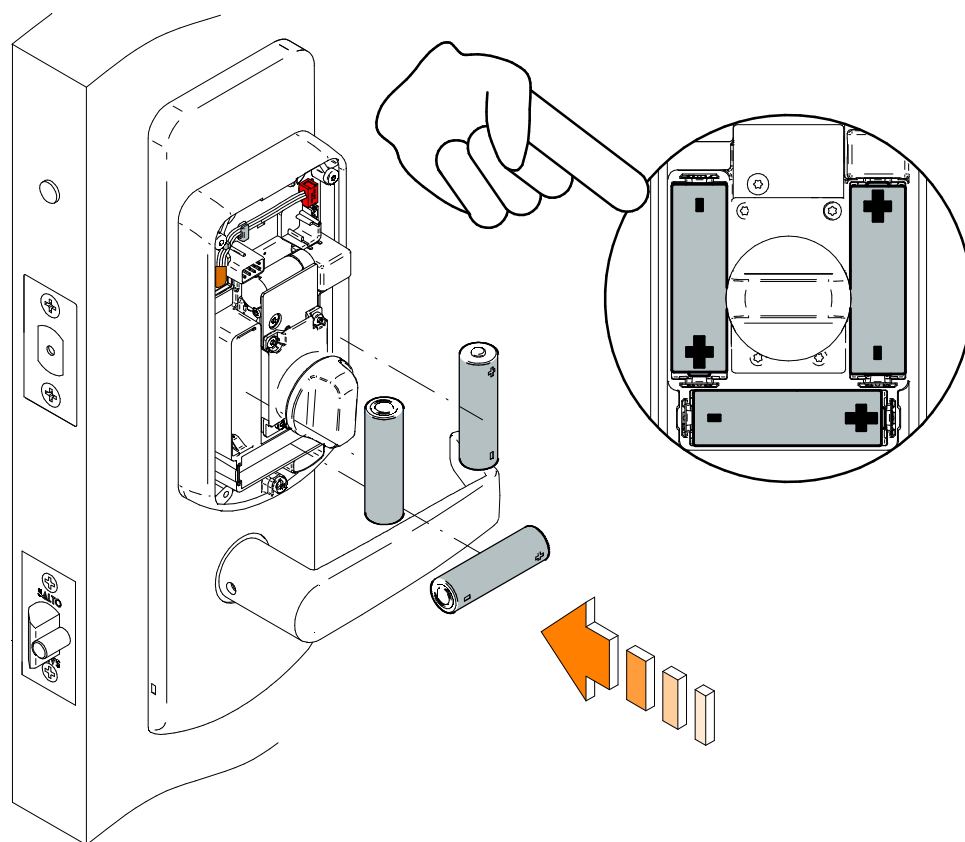


20

20a

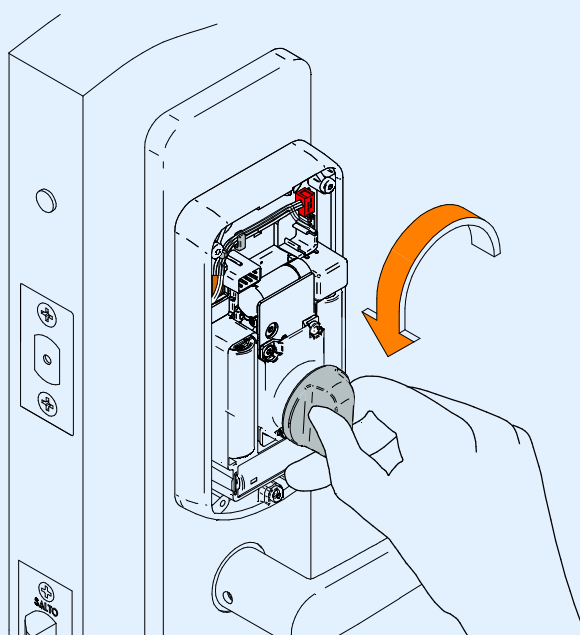


HANDING SET UP
DÉFINITION DU SENS D'OUVERTURE
CONFIGURACIÓN DE MANO

20b

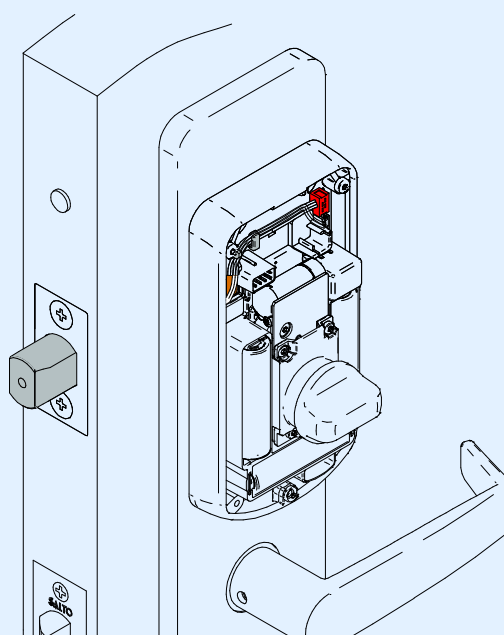


21

21a

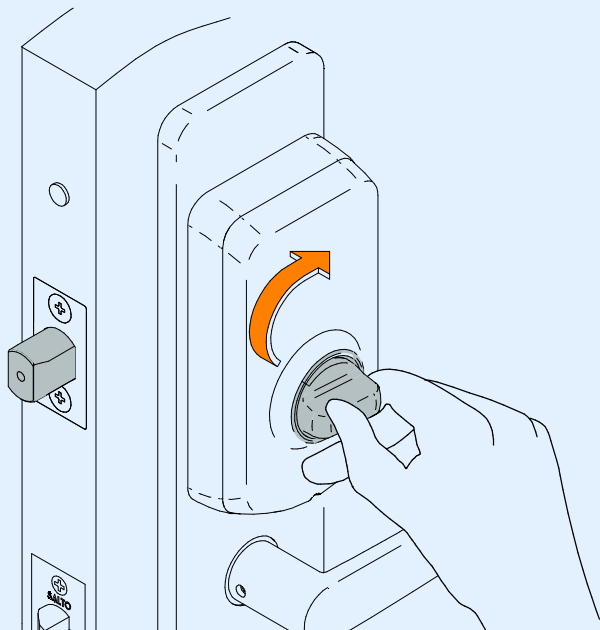

HANDING SET UP
DÉFINITION DU SENS D'OUVERTURE
CONFIGURACIÓN DE MANO


21b

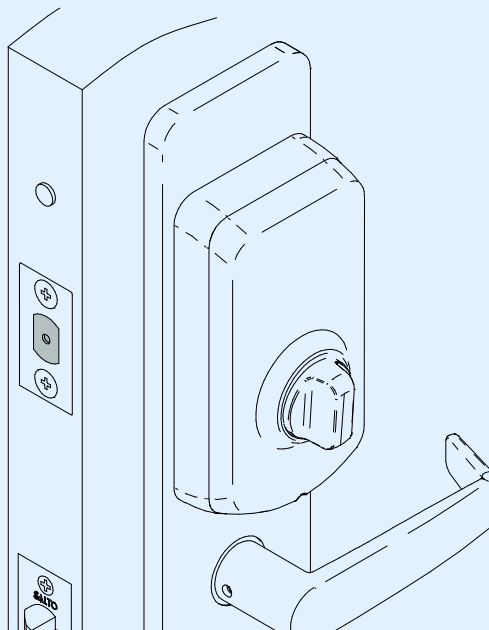


22

RESET
TOOL


22a

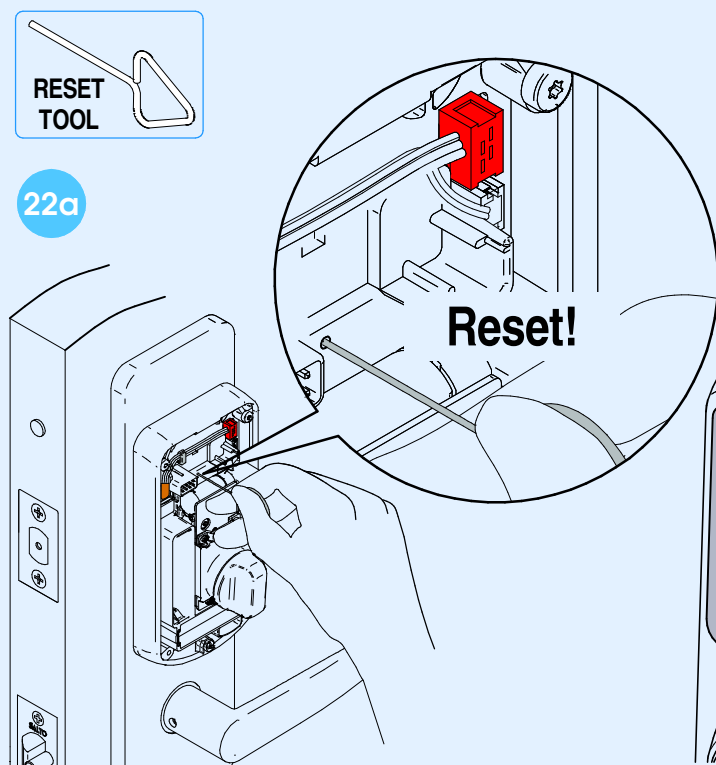


22b

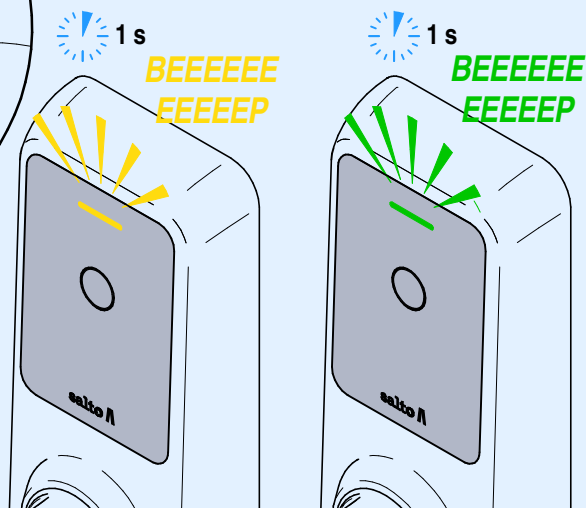


23

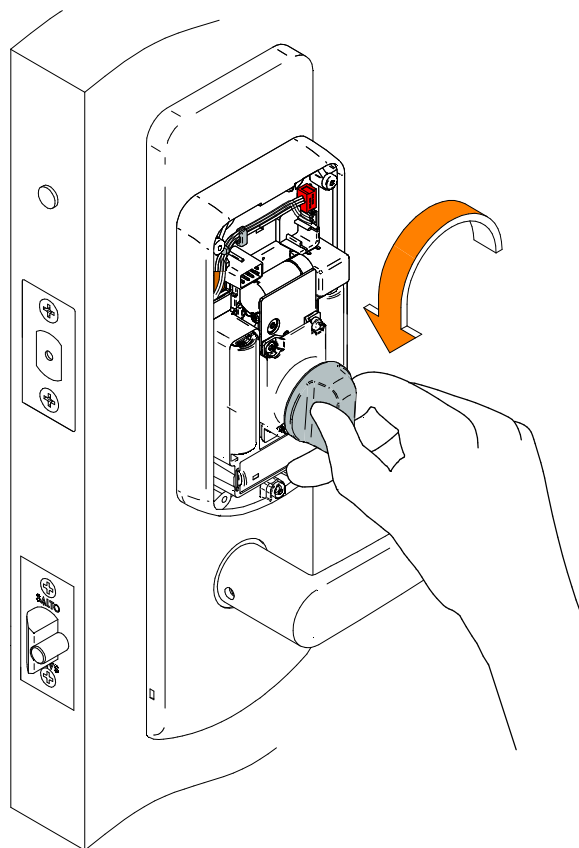


24

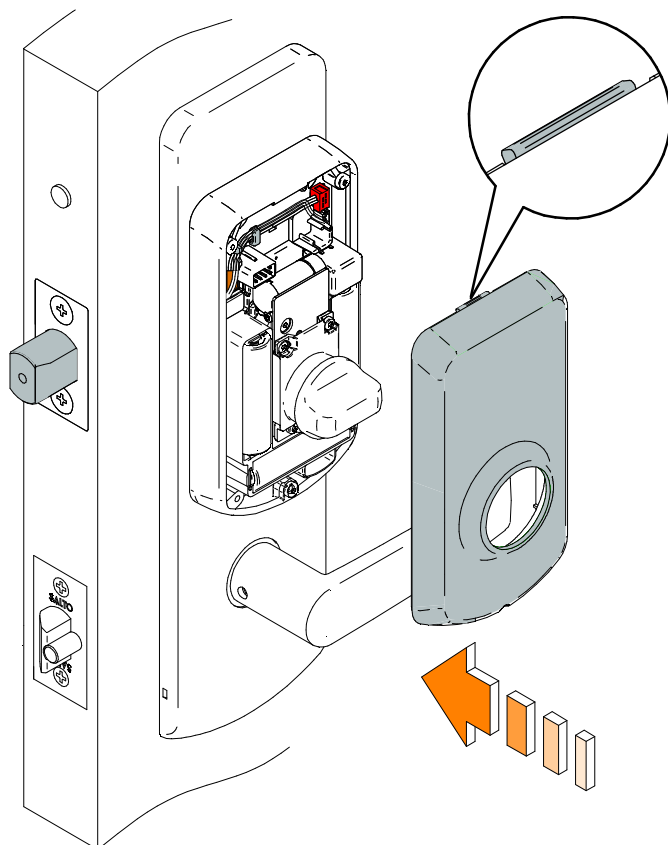


24a

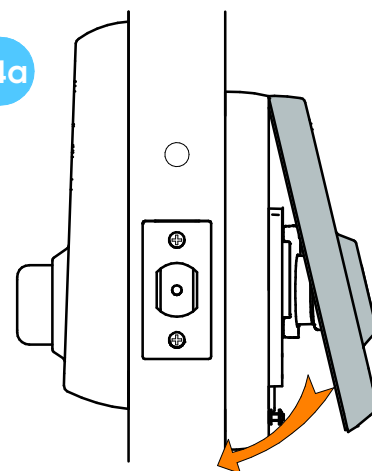

24b

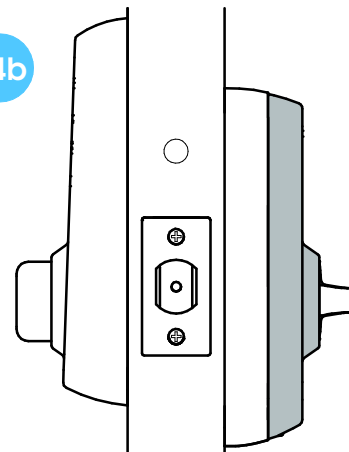


25

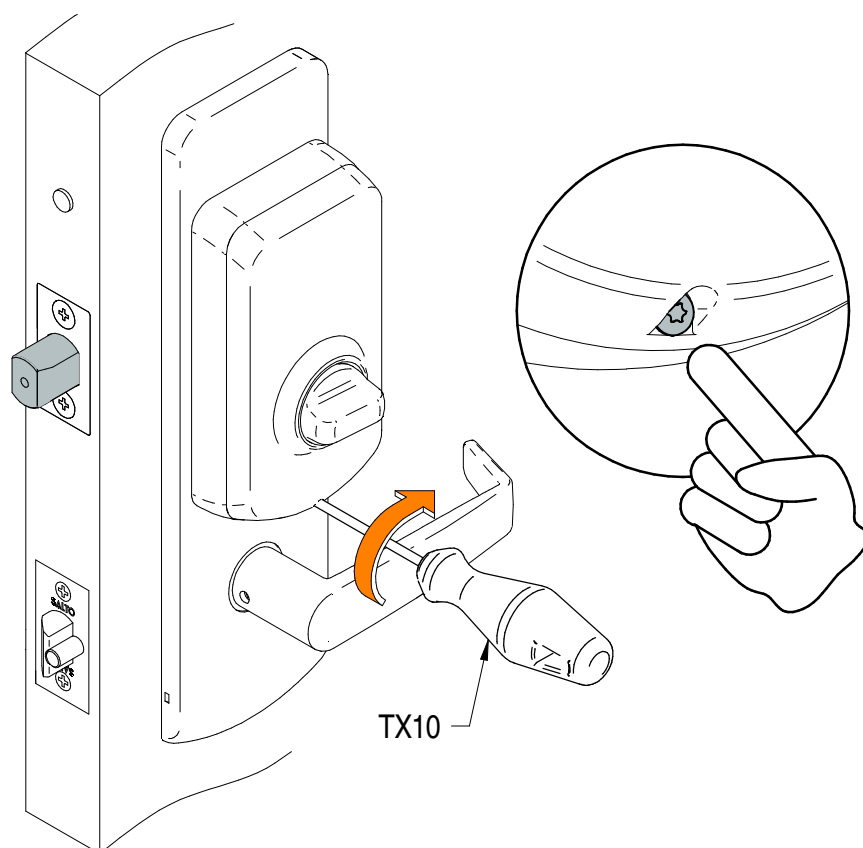


26


26a

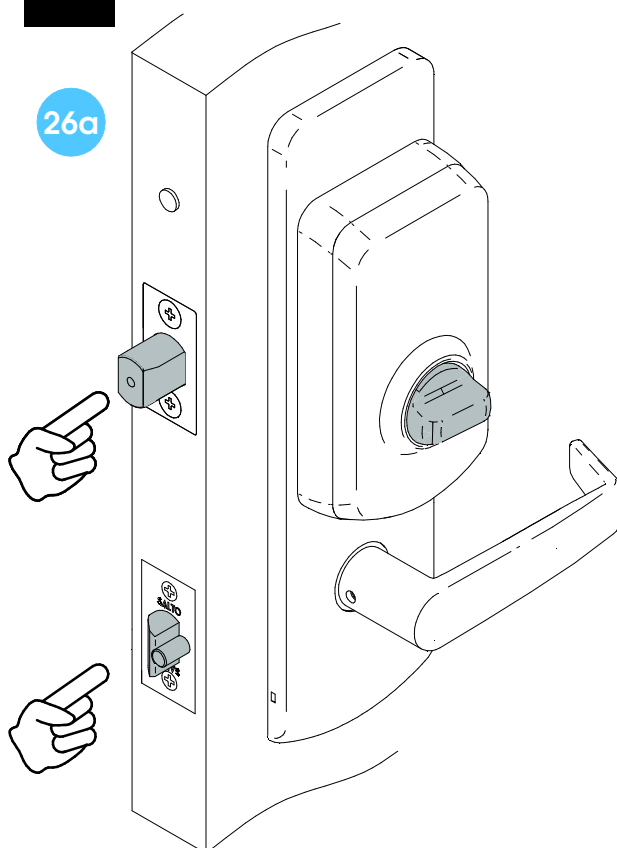


26b

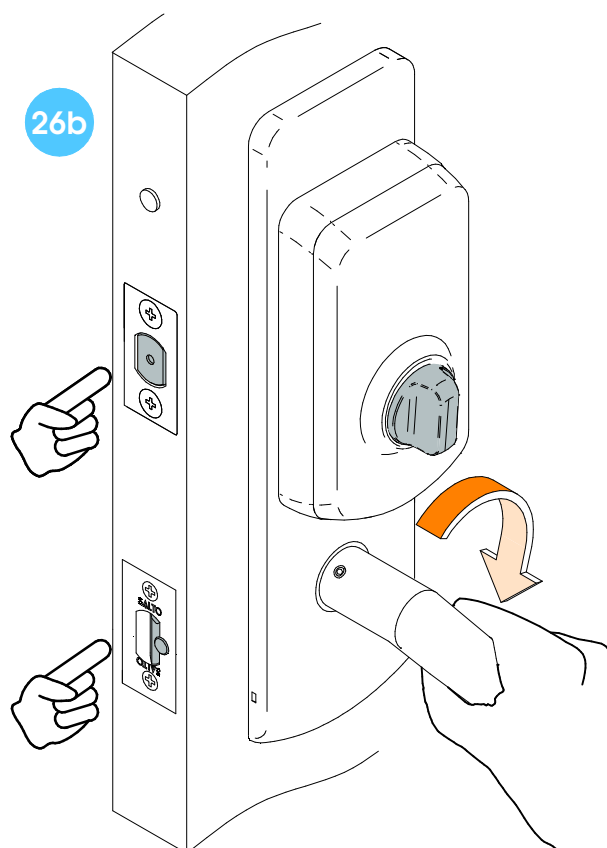

27

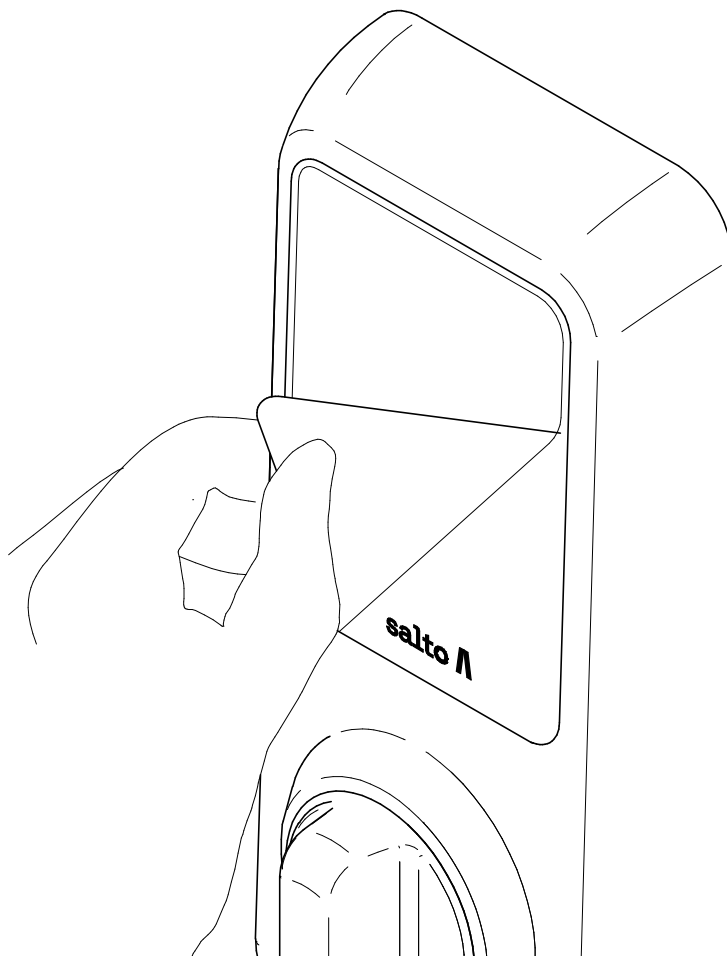

28

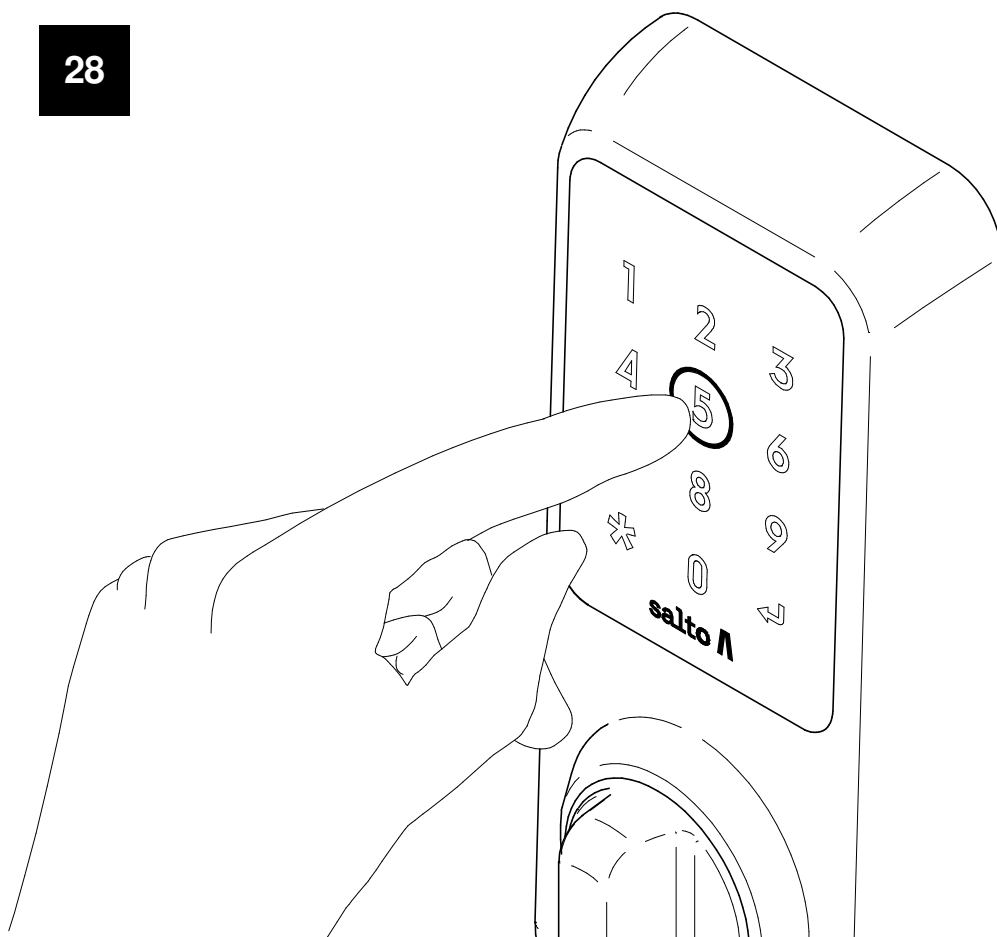


Eng Battery replacement


Remplacer les piles

Sustitución de pilas

1

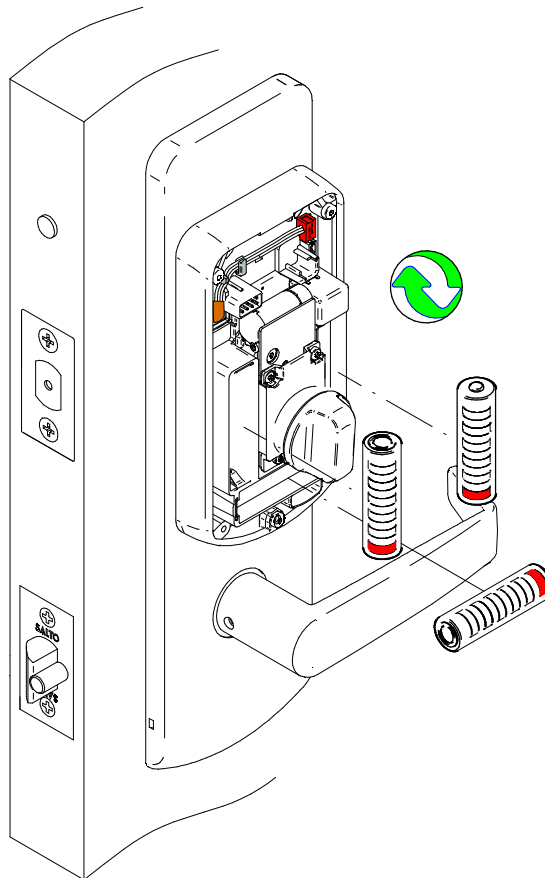


2

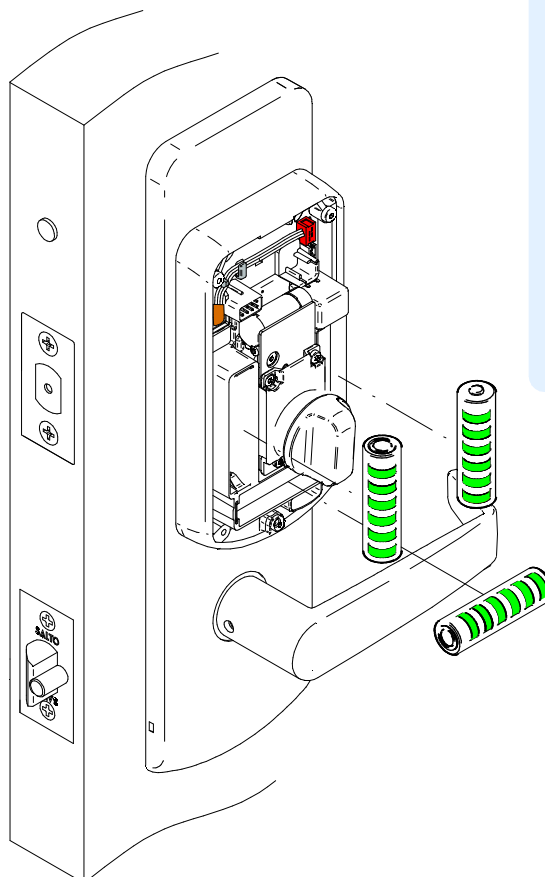

MAX.40"

Change/Remplacer/Cambio

Eng Emergency opening **E** Ouverture d'urgence **A** Apertura de emergencia

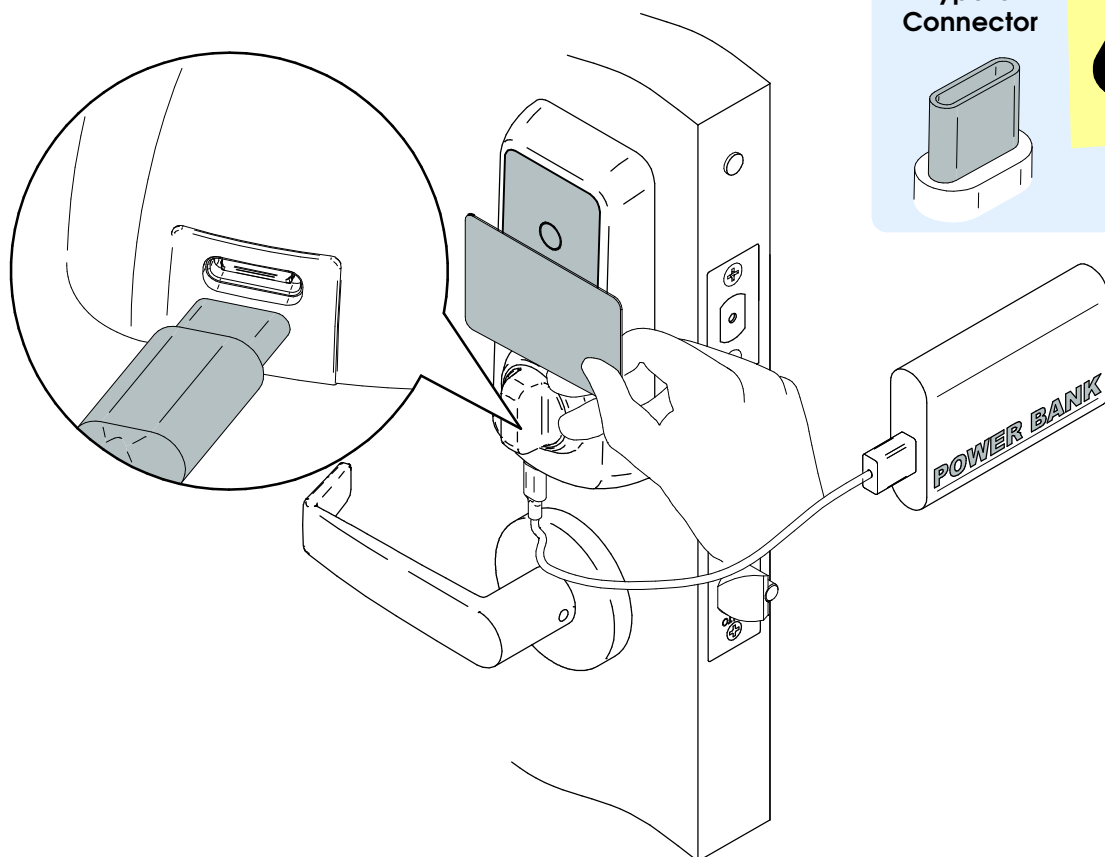

Type C
Connector

