



USER GUIDE

WIRED SIGNAL HUB for edelkrone MOCO

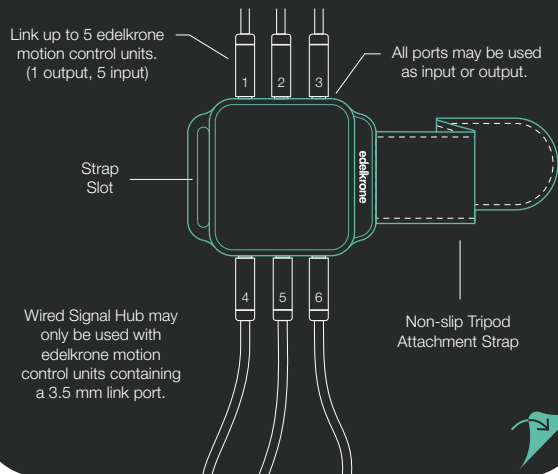

ATTACHING WIRED SIGNAL HUB TO TRIPOD



Simply wrap the strap around the tripod leg and slide the strap into the slot. Once through, pull tight and securely fasten the strap back to itself.

(Max. tripod leg dia. **40 mm**)
(Min. tripod leg dia. **20 mm**)

BOX CONTENTS

- Wired Signal Hub
- 3.5mm male to male Link Cable (2m) (5 pcs.)

DISCLAIMER

Should the product become damaged beyond repair, or if you wish to dispose of it, it must be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities. Observe the regulations of your area and country that relate to the disposal of electronic products.



- * Never force a different type of connector into a port.
- * Never use or store your Wired Signal Hub in areas subject to extreme temperatures or high levels of vibration.
- * Avoid dropping or causing physical damage to your Wired Signal Hub.
- **edelkrone cannot be held responsible for damage caused by improper use or modification of the product.

edelkrone

