

# 2x2 LED CEILING PANEL WITH SELECTABLE CCT


## Install Guide and Manual

### EASY INSTALLATION RECESSED INSTALLATION


Prior to install, remove the existing light fixture (if any) from the ceiling.




Required Tools: Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil, Philips Screwdriver.




1. Turn off the switch and circuit breaker before installing this LED light fixture.
2. Turn the Ceiling Panel face down on a flat surface.
3. Pop out (2) knockouts (choice of 5).




4. Connect conduit to each knockout.
- Pass wires through.




5. Connect the supply wires to the Ceiling Panel wires with included wire nuts.
- Black to Black (live);
- White to White (neutral);
- Green to Green (ground).




6. OPTIONAL for using a dimmer (not included):
- Connect the DIM+ and DIM- wiring of your Ceiling Panel to your dimmer with included wire nuts.




7. Replace driver covers.
- Tighten the screws.
8. BEFORE PROCEEDING
- On back of panel, slide the CCT Selection Switch to choose from three color temperatures (4000K, 5000K, 6000K).
- Light will use the selected CCT setting when switched on.



9. Locate the (2) protective brackets on back of panel.
- Bend up 90°.



10. Twist 90° so hook faces outside edge of Ceiling Panel.




11. Install Ceiling Panel in ceiling, using protective brackets.
12. Turn on circuit breaker and test the light.

### WARNING

- To reduce the risk of fire, electric shock or serious injury:
- Installation should be performed by a professional, qualified electrician familiar with the construction and operation of this product and the hazards involved.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Not suitable for a wet environment.
- LED must be installed in an appropriate environment to work. Harsh environments may damage the light or shorten its lifespan.
- Check for damage during shipping prior to install. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this LED light fixture. Recommended: Use an appropriate meter to accurately verify no voltage on the lines. After verifying there is no voltage, disconnect wires and remove existing light fixture from the ceiling (if any).
- After verifying no voltage, disconnect wires and remove existing light fixture from ceiling (if any).
- To ensure efficient light, regularly clean the light panel. Don't clean with harsh solvents; use a dry cloth.
- Use safety precautions. Safety eyeglasses and gloves are recommended.

### WIRING DIAGRAM

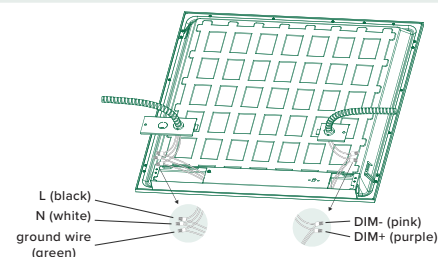

To make the light panel dimmable, connect a compatible dimmer (not included) to the dimming signal wires of the luminaire. Suitable for Constant Current Reduction Dimming 0-10V.

# 2x2 LED CEILING PANEL WITH SELECTABLE CCT


## Install Guide and Manual

### EASY INSTALLATION SUSPENSION INSTALLATION


**Note:** 2-piece suspension kits required (not included).




**Required Tools:** Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil, Philips Screwdriver.




1. Turn off the switch and circuit breaker before installing this LED light fixture.
2. Turn the Ceiling Panel face down on a flat surface.
  - Unscrew the (2) driver covers and set aside the screws.
3. Pop out (2) knockouts (choice of 5).




4. Connect conduit to each knockout.
  - Pass wires through.




5. Connect the supply wires to the Ceiling Panel wires with included wire nuts.
  - Black to Black (live);
  - White to White (neutral);
  - Green to Green (ground).




6. **OPTIONAL** for using a dimmer (not included):
  - Connect the DIM+ and DIM- wiring of your Ceiling Panel to your dimmer with included wire nuts.




7. Replace driver covers.
  - Tighten the screws.
8. **BEFORE PROCEEDING**  
On back of panel, slide the CCT Selection Switch to choose from three color temperatures (4000K, 5000K, 6000K).
  - Light will use the selected CCT setting when switched on.



9. Drill (2) holes in the ceiling. Place the anchors into hole. Insert the wire rope and screw.
  - Refer to suspension kit's install manual for complete details.



10. Adjust the support rope/wire so Ceiling Panel hangs horizontally.
  - Suspension kit is not included.



11. Install Ceiling Panel in ceiling, using protective brackets.
12. Turn on circuit breaker and test the light.

## WARNING

To reduce the risk of fire, electric shock or serious injury:

- Installation should be performed by a professional, qualified electrician familiar with the construction and operation of this product and the hazards involved.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Not suitable for a wet environment.
- LED must be installed in an appropriate environment to work. Harsh environments may damage the light or shorten its lifespan.
- Check for damage during shipping prior to install. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this LED light fixture. Recommended: Use an appropriate meter to accurately verify no voltage on the lines. After verifying there is no voltage, disconnect wires and remove existing light fixture from the ceiling (if any).
- After verifying no voltage, disconnect wires and remove existing light fixture from ceiling (if any).
- To ensure efficient light, regularly clean the light panel. Don't clean with harsh solvents; use a dry cloth.
- Use safety precautions. Safety eyeglasses and gloves are recommended.

## SPECIFICATIONS

Voltage	100-277V
Wattage	40W
Suitable for Locations Ingress	Damp
Housing	SPCC+PS Lens
Weight	4.18lbs
Warranty	10 years

To make the light panel dimmable, connect a compatible dimmer (not included) to the dimming signal wires of the luminaire. Suitable for Constant Current Reduction Dimming 0-10V.