


LED FLUSH MOUNT KIT USER MANUAL

WIRING

- To **+VDC** to activate Warning Mode (fuse @ 3A) **RED**
Apply **+VDC** to **RED** wire for High Power Operation in ECE R65 Class 2*.
- To Chassis Ground **BLACK**
- For Low Power Operation **WHITE**
Apply **+VDC** to **WHITE** wires while **RED** wire is activated for Low Power Operation in ECE R65 Class 1*.
- To **+VDC** to activate Cruise Mode (fuse @ 3A) **GREEN**
Precedence: Warning Mode > Cruise Mode
- For Synchronization and Flash Pattern **YELLOW**
Connect **YELLOW** wires of all lightheads together for synchronization.
(All lightheads should be set to the same pattern)

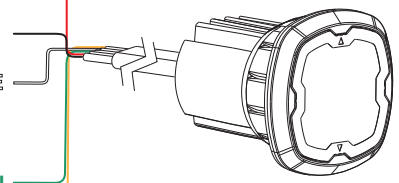

*Actual approval will be based on the model purchased.

OPERATION

For Simultaneous or Alternating Flash

1. Apply **+VDC** to **RED** and **YELLOW** wires simultaneously to enter *GROUPING MODE*;
lighthouse will display short (single or double) flashes:
 - Single flash = Group 1
 - Double flash = Group 2
2. Remove **YELLOW** wire from **+VDC** then momentarily apply **+VDC** to change Groups:
 - Lightheads of the same Group will flash together.
 - Lightheads of different Groups will flash alternately.
3. Save and Exit the *GROUPING MODE* by powering off the lighthouse.

For Flash Pattern Selection

- While in Warning Mode, momentarily apply **+VDC** to **YELLOW** wire:
- once to next pattern
 - quickly three times to FP#1

FLASH PATTERNS		
1	Double	[R65*]
2	Single	[2Hz]
3	Triple	[2Hz]
4	Quad	[2Hz]
5	Random	
6	Steady EF**	
7	Single	[SAE][CA13]
8	Double	[SAE]
9	Triple	[SAE]
10	Quad	[SAE]
11	Quint	[SAE]
12	Mega	
13	Giga	
14	Ultra	[SAE]
15	Single-Quad	
16	Singe H/L	
17	Single-Triple-Quint	


* Actual approval will be based on the model ordered.
** For use with external flasher controller.

INSTALLATION

Pop-n-Lock


Recommended Surface thickness @1.5~4.0mm

- 1 Select a mounting location and drill an 1.14" (29mm) cut-out, and then install the LIGHTHEAD onto the cut-out.

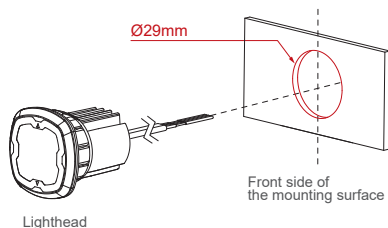


NOTE: To install more efficiently, use a rotating motion to guide the LIGHTHEAD when installing onto the cut-out.

- 2 Ensure that the optical stripes are aligned vertically.

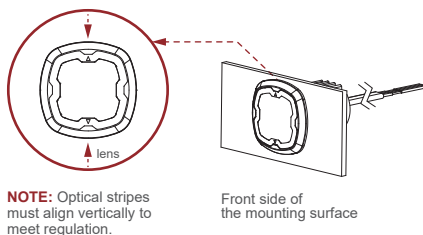


- 3 Where necessary, apply silicone around the reverse side to prevent from rotating.




Bracket Mount* (sold-separately)

- 1 From the front, install the LIGHTHEAD onto the BRACKET.

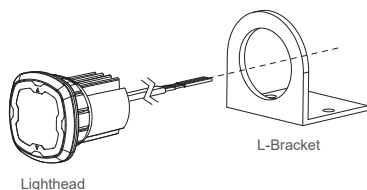


NOTE: To install more efficiently, use a rotating motion to guide the LIGHTHEAD when installing onto the BRACKET.

- 2 Ensure that the optical stripes are aligned vertically.

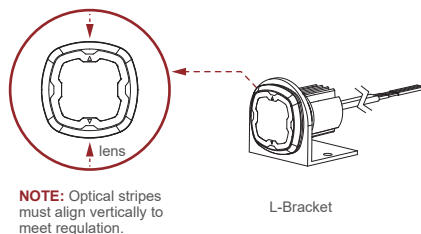

- 3 Secure the BRACKET onto the desired mounting surface with screws.

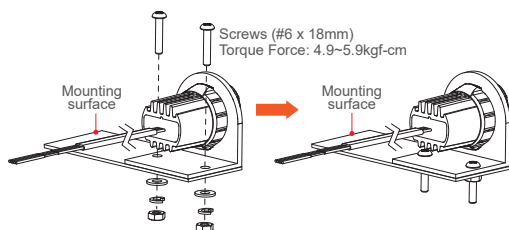

- 4 Where necessary, apply silicone around the reverse side to prevent from rotating.

