

VEVOR[®]

VEVOR Y428/Y428BT

USER GUIDE

VEVOR®



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:



CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there is any technology or software updates on our product.

CONTENTS

1. Introduction.....	01
2. Item Overview	02
3. Connect to PC/MAC	03
4. Label Setup	05
5. Driver Installation	07
6. MacOS & Windows Printing Setup	11
7. Wireless installation.....	15
8. User tips	17
9. LED status.....	18
10. Feeder Button Instructions.....	19
11. Safety Notices	20
12. Maintenance.....	20
13. Specifications.....	21

INTRODUCTION

Congratulations on your purchase of Vevor Printer. Vevor is your loyal business partner offering commercial solutions to batch labels printing.

Please take a moment to read this user guide as incorrect operation may result in unsatisfactory print quality, reduced user experience, or even damage to your printer or injury.

VEVOR Y428/Y428BT is a thermal label printer which uses thermal label media without ink, toner and ribbon. It can print various labels for logistics, pricing, barcodes, QR codes, shipping address, badges, etc.

Original instructions for Thermal Label Printer, please read all manual instructions carefully before operating. VEVOR reserves clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there is any technology or software updates on our product.

ITEM OVERVIEW

Packing List:

1x VEVOR Label Printer

1x User Guide

1x Service Card

1x Power Cable and Adapter

1x USB Stick(Contains drivers for MacOS& Windows)

1x USB 2.0 to USB C Adapter

30x Free Fanfold Labels

1x USB 2.0 Printer Cable

Feeder Button and Status Light

Power Switch

USB Port

Power Port

Cover

Thermal Printer Head (TPH)

Push Button

Label Guide

Label Outlet


Rubber Roller



Must turn off the switch before you plugging the power cable into power port each time or it may cause sparks!

CONNECT TO YOUR PC/MAC

- 1.Ensure the power is OFF(Press down“O”means Power OFF)



2. Connect the USB cable.


(Special Note: For Windows users, please connect the same USB port on your computer to avoid producing unwanted duplicates of Vevor printer in your system).



3. Make sure the power adapter is tightly connected, then connect the power cable to the printer's power port and the electrical sockets.



4. Turn the power ON (Press down "-" means Power ON), now you will see the top feeder button flashing.



Must turn off the switch before you plugging the power cable into power port each time or it may cause sparks!

LABEL SETUP

Vevor is capable of working with labels in various sizes, and it needs to learn your label properties before its first use.

To initiate **Automatic Label Identification** and run **Intelligent Label Study**, please follow these steps:

1.Power On

Turn on the power and wait for about 5 seconds until the printer is initialized.

2.Automatic Label Identification


Insert the label from the backside of the printer, the printer will grab the label and move back and forth, then stop with the green light on. Not a single label will be wasted during this procedure.

It's suggested to adjust the label guide to match the width of the label if necessary before the label is pushed in.




3.Intelligent Label Study

Press and hold the feeder button for about 3 seconds until you hear one beep then release, the label will move back and forth several times to study the label size, then you can start printing.

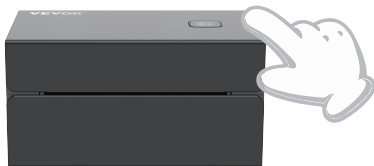

Since the printer needs to measure the length of the thermal paper, a stack of labels with at least 3 sheets is required to complete the process.

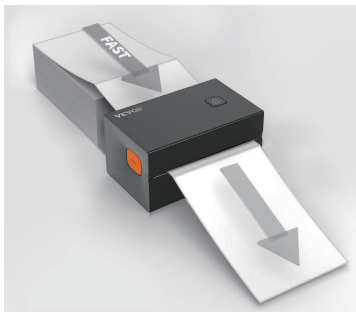

DRIVER INSTALLATION



5.1 Driver Installation for MacOS

Please download the driver for Vevor Y428/Y428BT from our official website <https://www.vevor.com/pages/download-center-label-printer>, or find it from the USB stick that comes with the package.

1. Double-click the file "Vevor-Mac-Driver-Latest.pkg".

2. Click "Continue" and follow the on screen instructions.


3. Click "Close" to finish.



4.Open "System Preferences",and click "Printers & Scanners".



5.Power on the printer, you will see "VEVOR Y428/Y428BT" in the list,Now you can print labels.

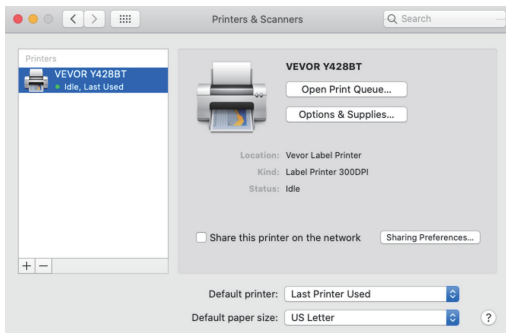


5.2 Driver Installation for Windows

Please download the driver for Vevor Y428/Y428BT from our official website <https://www.vevor.com/pages/download-center-label-printer>, or find it from the USB stick that comes with the package.



1. Open the "Vevor-Windows-Driver-Latest.exe" file with a double-click to start the installation process.

If the file is named "Vevor-Windows-Driver-Latest.zip", you need to decompress it to the .exe file.

2. Click "Install" and follow the onscreen instructions.

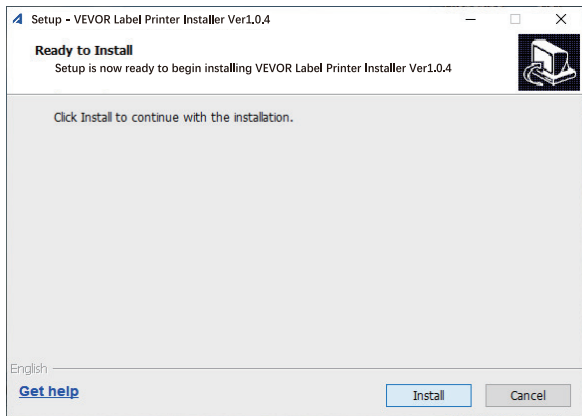

3. Click “Next” and “finish” to complete the driver installation.

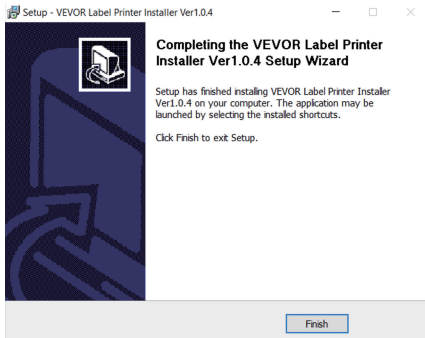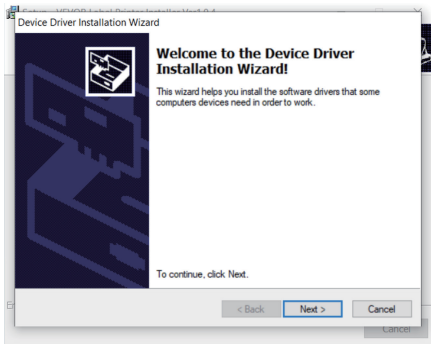


MACOS & WINDOWS PRINTING SETUP

Vevor Y428/Y428BT is set for the most popular size of 4x6 inches (102 x 152mm) by default, therefore you need to make sure that the "Paper Size" is appropriately set in your computer, and corresponding with the label papers you are using. Please set as follows:


6.1 MacOS Printing Setup

1. Open the PDF file named "Sample Label.pdf" which can be found in USB stick;


Select "File" → "Print" (take Preview as an example).

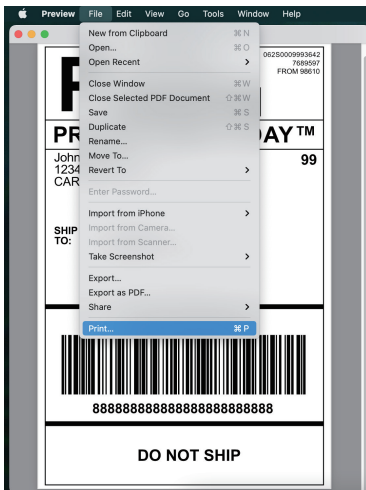

2. Choose 4.00x6.00" under "Paper Size" drop-down menu.

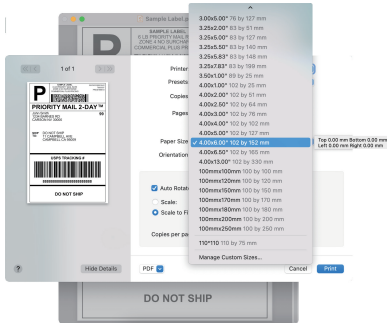


3. Select "Printer Features", then change the settings of printer, e.g Speed, Darkness, Rotate.

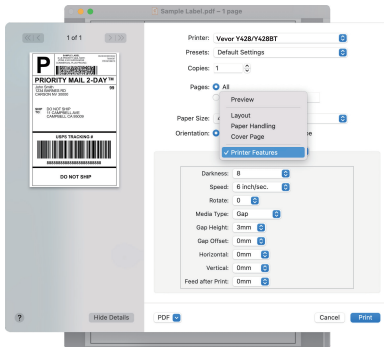


6.2 Windows Printer Setup

Take Windows 10 as an example:


1. Find "Vevor Y428/Y428BT" along the path: Control Panel→Hardware and Sound→Devices and Printers

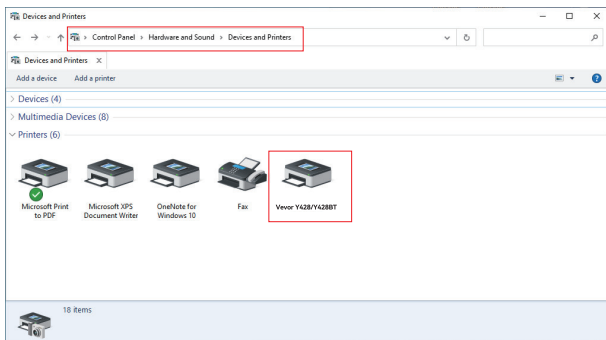

2. Right click on "Vevor Y428/Y428BT", choose "Printing Preference".

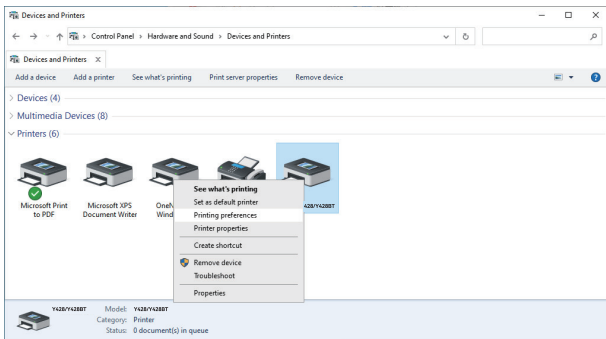


3. Click "Page Setup" and choose the proper size of your label, and make sure the chosen size is corresponding to the label paper you are about to use.

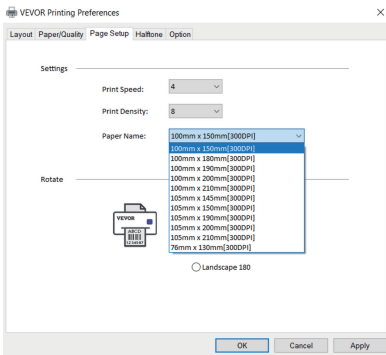

WIRELESS INSTALLATION

Wireless function only works with Y428BT.

1. Please search and download "FlashLabel" on App Store (iOS) or GooglePlay (Android), and then follow the remainder of the app. You can also scan QRCode below to download APP.

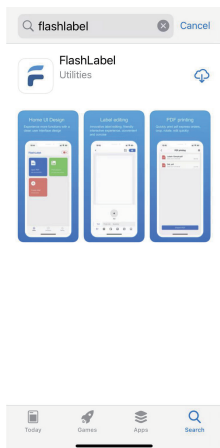


iOS




Android

2.Open "FlashLabel" run the app and click the red printer symbol on the upper right to use device Wireless.

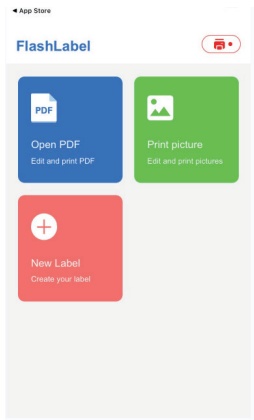

3.Connect Wireless to pair the printer.(Different printers have different device names to avoid connected wrong.)

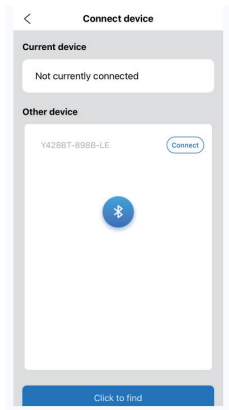

► **Note:**

Android users need to enter "0000" in the Wireless settings for Wireless pairing before connecting to the printer.

(Setting< Wireless <Choose the printer<Pair)

Wireless Printing request

Usually 0000 or 1234

☐ PIN contains letters or symbols

You may also need to enter this PIN on the other device.

☐ Allow access to your contacts and call history

CANCEL OK

4.Load the file to print(PDF,Photo,Customize labels can be printed).

USER TIPS

1. When you load the labels, the peeling-off side should face up. Or it would cause printing blank.
2. Make sure there are no particles on the surface of labels to avoid damages to the TPH (Thermal Printer Head).
3. For Windows users, please keep using the same USB Port on your computer to avoid producing unexpected duplicated copies of the printer on your computer.
4. The label size of the Vevor Y428/Y428BT printer is default to 4x6" (102mm x 152mm). Each time you change different label sizes, please run the Intelligent Label Study process before printing.
5. In case labels keep coming out unexpectedly, just press the feeder button to pause the printer, and clear the printing job from your computer.
6. If there are white spots on printed labels, it indicates that the printer head needs cleaning. Stop printing, and clean the TPH (Thermal Printer Head) after cooling to avoid burns.
7. When the label is jammed accidentally, please open the lid and take out the jammed labels slowly and patiently. The printer will resume after cleaning.

If you have any other issues, please contact us via the following methods: Email: CustomerService@vevor.com

LED STATUS

Light Status	Description	Solution
Green	Normal	(You are ready to print.)
Blue	Wireless connected	You are ready to print using wireless(Applicable to Y428BT only).
Flashing Red Fast (Every second)	This happens when the cover is not closed.	Close the lid properly
Flashing Red Slowly (Every 2 seconds)	This happens due to paper shortage.	Load Labels
Flashing Red and Green (Every second)	This happens when the printer head is overheated.	Wait until it cools down, the printing job will resume itself.
Light off & Buzzer rang	Low voltage	Switch to 24V adapter

If you have any other issues, please contact us via the following methods: Email: CustomerService@vevor.com

FEDDER BUTTON INSTRUCTIONS

1. Press once: Feed a blank page / Pause / Resume
 - (1) When the printer is in ready status and there are no holding jobs, press the feeder button once, the printer will feed a blank page.
 - (2) When the printer is running, press once will pause the job, press once again will resume the job. (Although it is not recommended, if you want to urgently stop an unwanted printing task, you may turn off the power directly and don't forget to cancel the print task from the computer at the same time).
2. Press and hold the feeder button for about 3 seconds until you hear one beep, Vevor will run the Intelligent Label Study process. This process is recommended each time you change the label sizes.
3. Press and hold the feeder button for about 5 seconds until you hear two beeps. Vevor will print a technical test page. If the test page looks good, it indicates that the printer head is working properly.
4. Press and hold the feeder button for about 15 seconds until you hear three beeps. This will reset the printer to the factory setting. This process is harmless to the printer and can be used if you want the printer to recover from an unknown error.



SAFETY NOTICES

1. **DO NOT** touch the printer head after use.
2. **DO NOT** disassemble or repair the unit by yourself.
3. **USE ONLY** approved accessories.
4. Keep the printer **away from** water, fire, or other objects that could destroy the components.
5. Keep the printer **away from** children.
6. **DO NOT** use the printer if you find any irregularities which could result in electrocution or fire.
7. Please **unplug the power** when not in use for a long time.

MAINTENANCE

Printer Head Cleaning Steps:

- (1) Please make sure that the printer is powered off and cooling down before cleaning;
- (2) Push the Push Button on the left side to open the printer lid;
- (3) Use the Printer Head Cleaning Wipes to gently apply onto the Thermal Printer Head(no water or other liquid should be applied).

SPECIFICATIONS

Model	Y428/Y428BT
Printing Method	Direct Thermal
Interfaces	USB Cable
Resolution	300dpi
Max Printing Speed	150mm/s
Power Adapter	24V/2.5A
N. weight	2.86lbs/1.3kg
G. weight	3.45lbs/1.57kg
TPH Printing Life	30km
Paper Width	40-110mm(±2mm)
Paper Thickness	0.06-0.25mm
Paper Height	NO Limitations
Storage Environment	Temperature: -20 to 80 °C Humidity: 5-95% (non condensing)
Operating Environment	Temperature: -10 to 50 °C Humidity: 10-90% (non condensing)
Dimensions	L175*W109*H94mm

DISPOSAL

This product is subject to the provisions of European Directive 2012/19/ EC. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices.



PAY ATTENTION TO

Pay attention to: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)This device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.

EU Importer: WAITCHX

Address: 250 bis boulevard Saint-Germain 75007 Paris

UK Importer: FREE MOOD LTD

Address: 2 Holywell Lane, London, England, EC2A 3ET




EUREP UK LTD
UNIT 2264, 100 OCK STREET,
ABINGDON OXFORDSHIRE ENGLAND OX14 5DH



EUREP GmbH
Unterlettenweg 1a, 85051 Ingolstadt,
Germany

VEVOR®

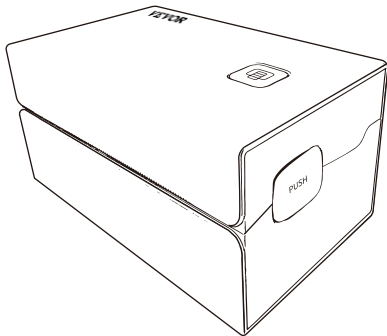

Manufacturer: Xiamen Print Future Technology Co., LTD.

ADDRESS: Area C, Room 502, No. 17 Kengping Road, GuanKou Town, Jimei District, Xiamen City

Enjoy your printing!

If you have any questions, issues or concerns about this product, please contact VEVOR for support.

E-mail: CustomerService@vevor.com

VEVOR[®]

E-mail: CustomerService@vevor.com