

Auriani®

PHOTOGRAPHY FILL LIGHT

USER MANUAL



ST-120B

Product Parameters

Model: ST-120B	Color Temperature: 2500K-9000K
Working Voltage: 3.7V	Number of Lamp Beads: 120PCS bright LED
Power: 12W	Battery Type: Built-in 3000mAh lithium battery
CRI: >95	Product Dimensions: W160xD100xH45mm
Beam Angle: 120°	Product Weight: 300g
Charging Interface: Type-C	


Warnings

- 1. This video light is not waterproof. Please keep it away from liquids or moisture to prevent the risk of electric shock, otherwise it can be extremely dangerous and even fatal.
- 2. This Video Light Built-in Battery. Do not throw this product into fire or liquid and keep it away from open flames or heat sources, since the excessive temperatures can cause the battery to overheat, leading to hazards such as combustion, explosions, or fire risks.
- 3. Please do not disassemble or modify the product without permission. If the product malfunctions, please contact the authorized dealer for maintenance. Any damages resulting from unauthorized disassembly or modification will not be covered under the warranty.
- 4. Please be aware that this product generates heat during use. Therefore, please avoid using it near flammable or explosive materials to ensure safety.
- 5. When the light is illuminated, we kindly recommend avoiding direct eye contact with the light source to prevent any potential harm to your vision.
- 6. To ensure safety and prevent damage, please refrain from lifting the camera by lifting the video light since it cannot bear the weight of the camera.
- 7. Please keep the product out of reach of children, ensuring their safety and preservation of the equipment.

Package List

LED Fill Light ×1	Multifunctional Back Clip ×1	User Manual ×1
360° Rotatable Bracket ×1	Type-C Charging Line ×1	Color Filter ×6
Light silicone Cover ×1	Front Camera Clip ×1	Hot Shoe ×1

Components

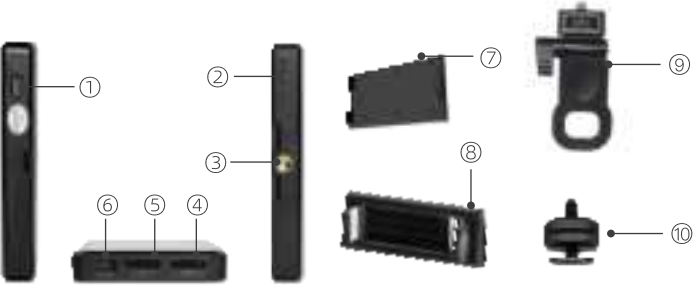

- ①Type-c Charging Interface

②Power Indicator Light

③1/4"-20 Screw (one on each side)

④Color Temperature Adjustment Knob

⑤Brightness Adjustment Knob
- ⑥ON-OFF

⑦Multifunctional Back Clip

⑧360° Rotatable Bracket

⑨Front Camera Clip

⑩Hot Shoe

Instructions for Use

1. Removal and installation of the multi-function back clip



Figure 1



Figure 2

Installation and Disassembly:

Buckle the single buckle of the multi-function back clip into the single buckle hole of the auxiliary light, press the ends of the single buckle side of the multi-function back clip with both fingers, gently push and press downwards in the direction of the double buckle, and the installation is completed. Similarly, it can be removed by following the same steps as above. (Figure 1-2 )

2 . 360° Rotating Bracket Installation and Removal

When the side of the 360° Swivel Bracket marked with the arrow indication is on the same side as the arrow indication on the Multi-function Back Clip, push in the opposite direction of the arrow to complete the installation. When removing it keep the two indicated arrows in the same direction and just push it out in the direction the arrows are pointing.( Figure 3-4 )



Figure 3



Figure 4

3 . How to Use the 360 Rotating Bracket

(1). Panoramic Rotationit can be installed on the supplementary light and can be rotated 360° according to the requirements. ( Figure 5 )



Figure 5

(2). The side of the swivel bracket without the arrow label opens the support feet to support the fill light in a vertical orientation. Without opening the supporting feet, the fill light can be supported horizontally on the plane. ( Figure 6-7 )



Figure 6



Figure 7

(3). Used in conjunction with fill light and mobile phone: After the bracket is installed on the fill light, open the clamp arm of the bracket outward at 90°, pull the movable side of the clamp arm outward to a suitable position, and clamp the mobile phone without releasing it, so that the fill light can be used as fill light for mobile live broadcast, photography, photo taking, etc. ( Figure 8-9 )

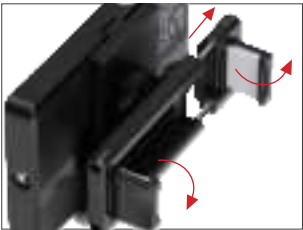


Figure 8



Figure 9

(4). Use alone with the mobile phone: Open the clamp arm of the mobile phone bracket 90° outwards, and flex the clamp arm. Pull the moving side outward to a suitable position, and clamp the mobile phone without releasing it. Open the support legs of the bracket, and you can put your hand. The machine is supported laterally on a plane. ( Figure 10 )



Figure 10

Operation

1. **Charging:** Use the Type-C charging cable to connect the computer (powered on) or the adapter of DC5V/1 A(not provided) connect to the product for charging. During the charging process, the product power indicator flashes. The power indicator light is always on after charging is complete.

2. **Power On and Off:** Turn the power switch on the side of the supplementary light to the ON position, the power is turned on, and the boot is complete. On the contrary, turn the power switch to OFF, the power is disconnected, and the supplementary light is turned off. ( Figure 11 )



Figure 11

3. **Brightness Adjustment:** Turn the brightness adjustment knob to the "+" direction to increase the brightness, and rotate to the "-" direction to reduce the brightness. ( Figure 12 )



Figure 12

4. **Color Temperature Adjustment:** Turn the color temperature adjustment knob toward the power switch, and the color temperature will change from white to warm light, and vice versa from warm to white light. ( Figure 13 )



Figure 13

Guarantee:

This product is guaranteed for one year against all defects of workmanship and materials. Within this warranty period, Auriani will repair or replace, at its discretion, defective parts at no charge. This warranty does not apply if the warranty period expires.

Support :

In the event of a warranty claim, or if service is required for this product, please contact Auriani customer service at :

auriani@bestykol.com



MADE IN CHINA