


Items:  
HT-G3LHB-2FT2L-F8155/277-250D-S  
HT-G3LHB-2FT4L-F8210/277-250D-S  
HT-G3LHB-2FT2L-F8155/277-250D  
HT-G3LHB-2FT4L-F8210/277-250D  
UC-LHB-4FT2L-F82701-277-250D

### LED HIGH BAY

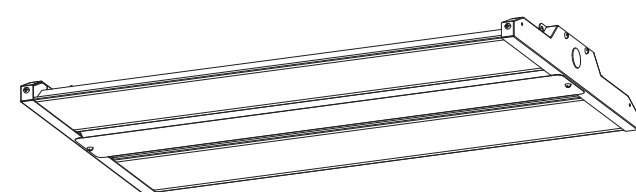

1

#### SAFETY INSTRUCTION

##### ⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions:
  - Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
  - For the installation: If you are unsure about this installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
  - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
  - Do not make or alter any open holes in an enclosure of wiring or electrical components during its installation.

##### ⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

##### ⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulbs or handling fixture.
- NOTICE: Green ground screw provided in proper location. Do not relocate.
- NOTICE: Minimum 90°C capable conductors.
- NOTICE: Specifications and dimensions subject to change without notice.
- NOTICE: Suitable for Dry or Damp location.


2

#### TOOLS REQUIRED

NOTE: Bring your material and these instructions to the Point of Purchase.



#### PACKAGE CONTENT


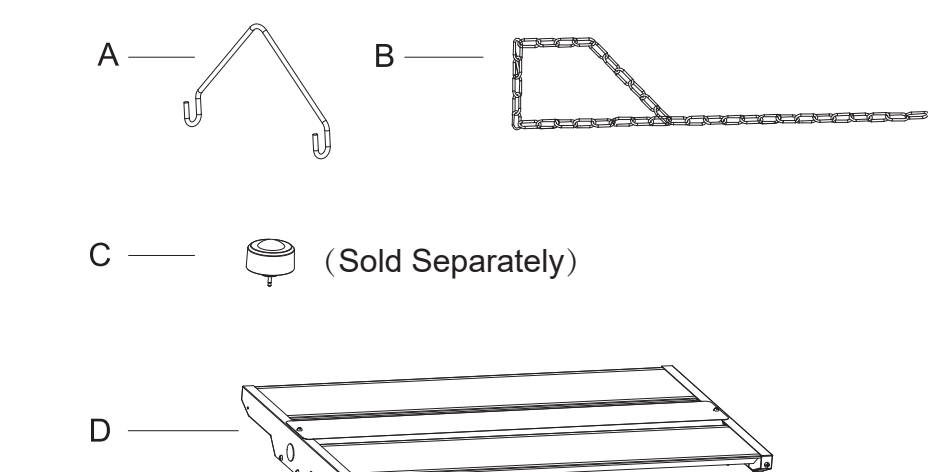


	PARTS	PCS
A	hook	2
B	chain	2
C	Motion Sensor	1
D	LED fixture	1

3

#### INSTALLATION INSTRUCTION

##### General Wiring Diagram

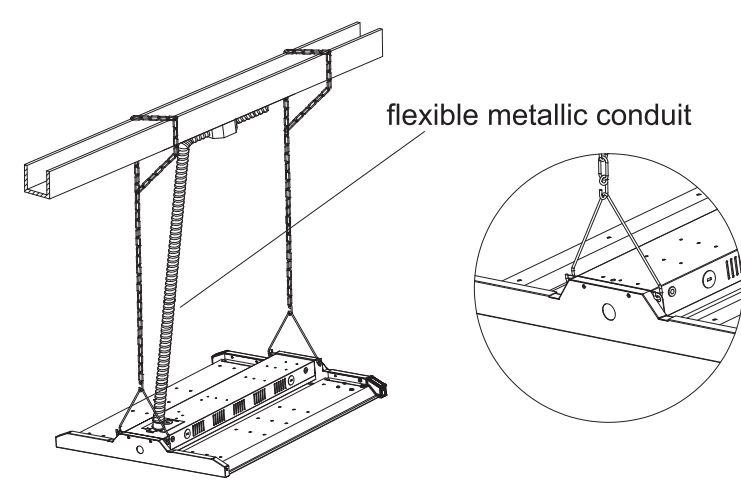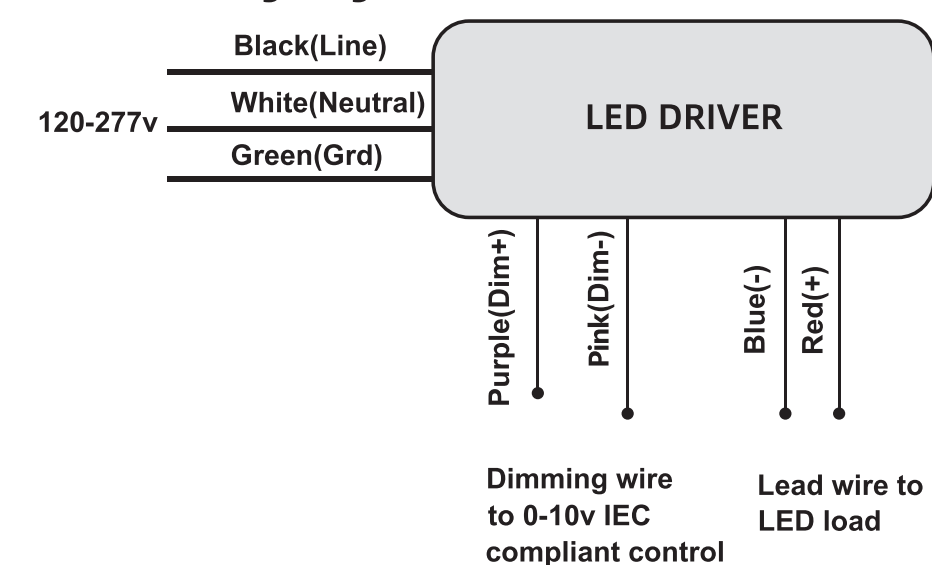

4

#### INSTALLATION INSTRUCTION

##### Installation Step:

Always turn off the power supply from main circuit breaker first!

Chain Mounting with 4 hook

Step1: Clip the brackets to the slots of fixture

Step2: Attach provided 4 hooks to brackets


Step3: Attach provided chain to the 4 hooks and mounting surface.

\*\*NOTE: Purple and pink lead inside the driver compartment are 0-10V (low voltage) dimming leads. Connect to dimming low-voltage wiring only.


• Clean all residues/fingerprints from the new LED high bay and lens. Double check all hanging hardware before moving onto the next installation.

##### With Motion Sensor-Install sensor (sold Separately)

1.Remove the sensor base cover.

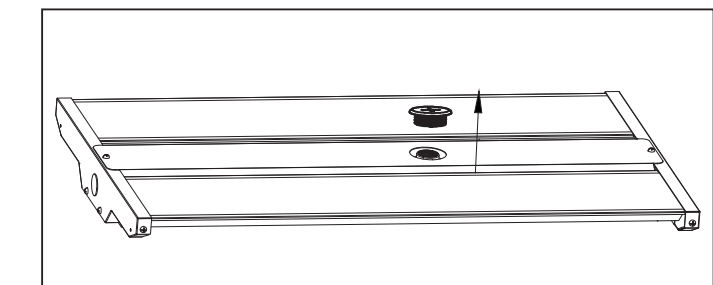


2.Install the sensor. (X)

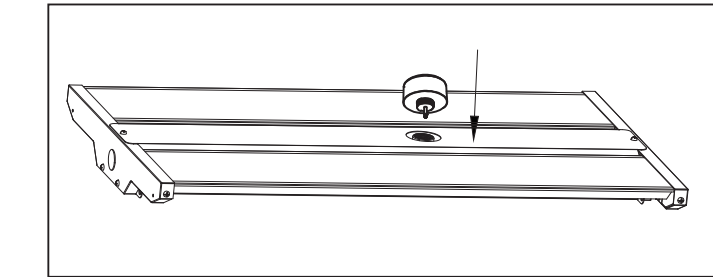


5

#### INSTALLATION INSTRUCTION

3.The installation is completed.

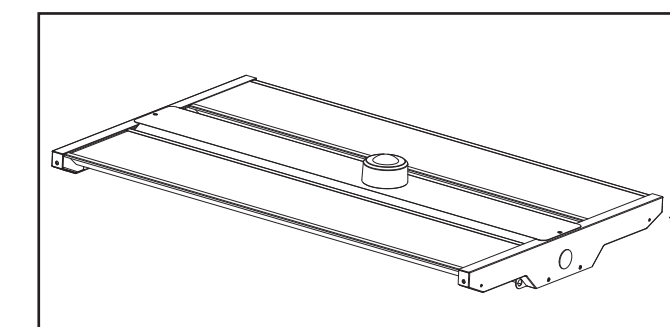

##### General Wiring Diagram

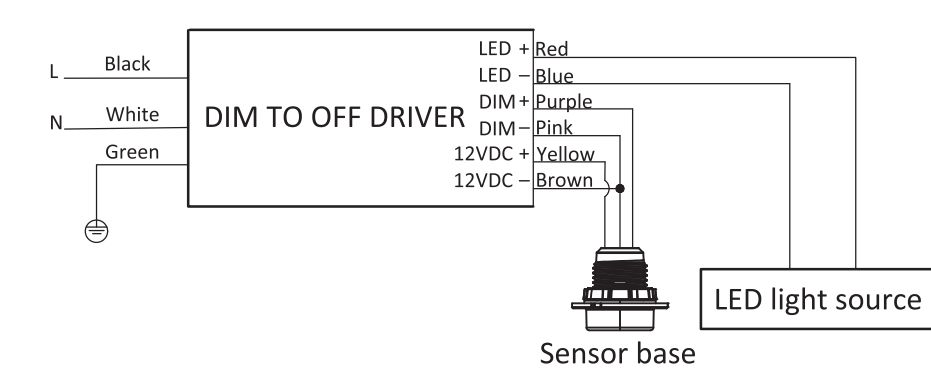

6

#### WARRANTY

This product is warranted for 5 years from the date of purchase.If this product does not perform to the specifications supplied on this package,contact in email to support@natusonlighting.com for product return and replacement.This replacement is the sole remedy available.Liability for incidental or consequential damage is expressly excluded.

7