


【 Packing List 】

Speaker——1PC
Microphone——2PC
Type-C Charing Cable —— 1PC
User Manual —— 1PC

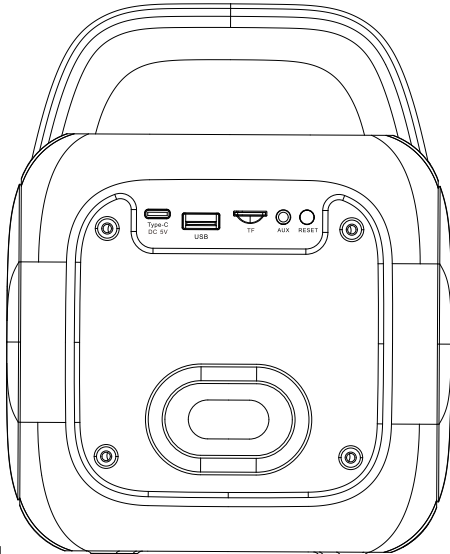

【 Key 】

- : Power Key: Press and hold to turn on/off . Press to play or pause the sound
- : Mode Key: Press to select the different mode. Press for twice to turn on/off the wireless microphone function.
- * Press and hold to setup TWS function.
- : Forward Key: Press to increase volume of sound. Press and hold to play next sound.
- : Backward Key: Press to decrease volume of sound. Press and hold to play last sound.
- : Light Key: Press Light key to select light effects. Press and hold Light key turn or off the Atmosphere lamp.

【 Device power supply and Charging instructions 】

1. (Type C USB 5V) power supply.
2. Built in Lithium Rechargeable Battery(Not removable) .
3. Charging Lithium Battery to connect USB cable with speaker, red LED indicator on.After about 5 hours, it reaches to full capacity green LED indicator on.
4. If unused the device for more than one month, please recharge it every month to keep the Lithium Battery be activity.
5. If the device doesn't use within two and three months in avoid of battery over discharge or battery leakage problems ,please check the Lithium Battery before using .

【BT Mode】



Press and Hold Power key to turn on the speaker , enter BT mode with BT LED flashing , wireless microphone function with MIC LED flashing and atmosphere lamp on.

Firstly, turn on Bluetooth device in the cell phone/ MID/computer and select the device name as " **K1** " to connect. After connected and BT LED on , user hear the indicated sound. When return Bluetooth mode, Bluetooth speaker and Mobile phone will paired automatically.

Press " " key to play or pause the sound .

Press and hold " " key to play last sound.

Press " "key to play next sound.

Press " " key to Increase the volume of sound.

Press " "key to decrease the volume of sound.

Press " **M** " key to enter MP3 player mode.

【MP3 Player Mode】



Insert Micro SD card or Udisk inside the speaker to enter MP3 Player Mode .

Press " " key to play or pause the sound .

Press and hold " " key to play last sound.

Press " "key to play next sound.

Press " " key to Increase the volume of sound.

Press " " key to decrease the volume of sound.

Press " **M** "key to enter AUX player mode.

【AUX Player Mode】



Insert 3.5mm Jack AUX cable inside the speaker to enter AUX mode.

Press " " key to increase the volume of sound.

Press " "key to decrease the volume of sound.

【Atmophere Lamp】

Press " "key to select a variety of different lighting effects.

Press and hold " " key turn off the Atmosphere lamp.

【Karaoke Mode】



When turn on the speaker , press power key to turn on RF microphone to connect the speaker .When connected successfully , MIC LED is on.


Press "**M**"key for twiceto turn off wireless microphones function and MIC LED is off.

Press "**M**"key for twice to turn on wireless microphones function and MIC LED is flashing.

【How to use the RF microphone】

The RF microphone with red O ring is the host

The RF microphone with orange O ring is the guest

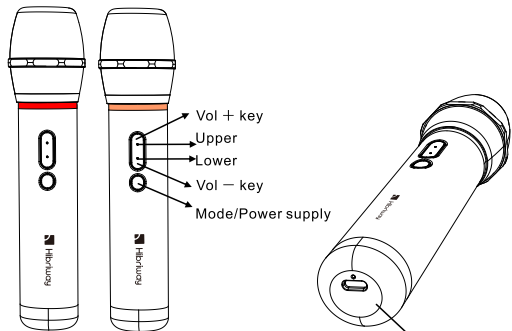

USB Type C Charging, antenna do not cover the part, two-color charging light,
note: charging red light, full green light.

****There are different versions of this machine configuration (with and without a microphone). Based on your model configuration, please refer to the relevant instructions for use.**

1. Press Mode key on the speaker for twice to turn on the RF microphone function and show MIC LED flashing. Press and hold the Mode key on the RF microphone to turn on the RF microphone and upper Led is on .
2. Press Mode key on the speaker to enter Bluetooth mode ,turn on the microphone function and show MIC LED flashing . Press and hold the mode key on the microphone to turn on the RF microphone and show upper Led on.
3. The Functions of the RF Microphone List

| Soundeffect | Operation | RED/Host Microphone | Orange/Guest Microphone |
|-------------|--|---------------------|-------------------------|
| KTV | Press the Mode key to enter the outdoor sound effect | Available | N/A |
| | Press and hold the Mode key to power off. | Available | Available |
| | Press the Vol+ key to increase the volume of the RF Microphone.Press the Vol- key to decrease the volumeof the RF Microphone. | Available | Available |
| | Upper LED | On | On |
| | Lower LED | Off | Off |
| Outdoor | Press the Mode key to enter the original sound effect | Available | N/A |
| | Press and hold the Mode key to power off. | Available | Available |
| | Press the Vol+ key to increase the volume of the RF Microphone.Press the Vol- key to decrease the volume of the RF Microphone. | Available | Available |
| | Upper LED | OFF | On |
| | Lower LED | On | Off |

| | | | |
|----------|--|-----------|-----------|
| Original | Press the Mode key to enter the KTV sound effect. | Available | N/A |
| | Press and hold the Mode key to power off. | Available | Available |
| | Press the Vol+ key to increase the volume of the RF Microphone.Press the Vol- key to decrease the volume of the RF Microphone. | Available | Available |
| | Upper LED | On | On |
| | Lower LED | On | Off |

If the RF microphone doesn't work properly , you can follow the below instruction

How to connect the RF microphone and the speaker .

Under Power off mode of the two microphones . Press and hold the Vol+ key on the RF microphones and then press and hold the Mode key on the microphone until two green LED flashing . Press Mode key on the speaker to turn on the microphone function and show MIC icon flashing . After 3 secs, press Mode key on the microphone to finish the connection.

If you buy two speaker , you can follow the below instruction to pair two speakers as TWS function.

How to use the two RF microphone under TWS

1. Press Mode key to enter Bluetooth mode . Press and hold Mode key to make the connection with two speakers . When connected successfully , two speakers play the connecting sound effect . Press Mode key for twice on the two speakers to turn off the microphone function and MIC LED off .
- 2.Under power off mode of the two RF microphones . Press and hold the Backward key on the two RF microphones and then press and hold Mode key on the two RF microphones until two

LED flashing . Press and hold Mode key on the two speakers to turn on the RF microphone function show MIC LED flashing of two speakers . After 3 secs, press mode key on the two microphones to finish the connection.

Microphone parameters

| | |
|---------------------|--|
| Frequency range | 611.5~640MHz, AVB channels each have 10 adjustable frequency points |
| Frequency stability | 10PPM |
| Modulation mode | DQPSK digital modulation |
| Frequency response | 50HZ~15KHZ |
| SNR | ≥ 80DB |
| THD | ≤ 1% |
| Use distance | ≤ 10M |
| Microphone TX Power | 6DB+/-2DB |
| Operating Current | 110MA+/-20MA |
| Current Usage Time | 10 hours |
| Battery | 3.7V 1200 mAh 18490 |
| Charging Port | USB Type C Max. 5V 2A |

*The appearance,function and specification of the product may change
The company reserves the right of final interpretation.
Specification

| | | |
|-----------------------|---------------------------------------|--|
| MP3 | Built in lithium Rechargeable Battery | Play time : Max 4-5 Hours *According to the level of Volume |
| | Output power | 50W |
| | MP3 Bit Rate | 8K bps ~ 320K bps |
| | Signal noise Ratio(SNR) | 85dB |
| | Signal Distortion | <0.55% |
| Music Format | | MP3 |
| Operation temperature | | -5 to 40 Celsius Degree |

FAQ

| | |
|------------------------------|--|
| NoPower | Check lithium Rechargeable Battery which has power or not Cheak DC5V Plug which is plugged properly |
| No sound or sound distortion | Check the level of volume which is not on zero status Check music file which is damaged or not .The damaged music file produce sound distortion and cannot played. Please keep the good music files. Check Lithium Rechargeable Battery which is not enough power. |
| Device hang up | Use<1mm stick to press and hold reset key inside hole between time set key and alarm set key. Switch OFF the power then Switch ON the power again or After charging Switch ON the power once again. |