

Rheem Electric Stainless Steel 250L 4A1250, 4A2250

5 - 8


PEOPLE³

Indoor/
Outdoor

INSTALLATION

Features & Benefits

- Stainless steel cylinder and water fittings resist corrosion for longer, extending product life
- Dual handed fittings located on the front of the water heater
- Twin element model- 4A2250
- 19% better performance than MEPS reduces energy use
- Up to 42% lighter² - for easier handling and installation
- Australian made
- 12 year cylinder warranty¹

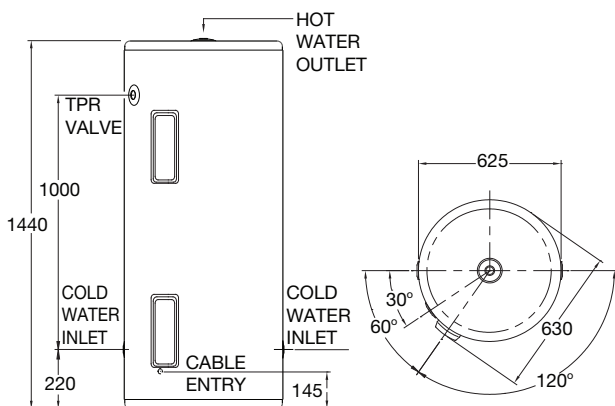

MODEL	4A1250 4A2250
Hot Water Delivery (L)	250
Element Rating (kW)	3.6, 4.8
Relief Valve Pressure (kPa)	1000
Expansion Control Valve (kPa)	850
Max Water Supply Pressure:	
with ECV (kPa)	680
without ECV (kPa)	800
Water Connections	Rp ³ / ₄
Approx. Weight (packaged) kg	45



Tap QR code for
installation
instructions

