

Product advantages

- ❑ Supports larger current output, up to 160A
- ❑ A single system has a higher battery capacity and can be compatible with inverters with higher power
- ❑ Dual electrode disconnection design for battery system
- ❑ The battery system has dual power output plugins, and the single power plugin can support 100A. It can be connected to two battery DC interfaces of the inverter separately
- ❑ A concise data display interface to assist in faster initial installation and debugging
- ❑ Supports mobile Bluetooth APP access, convenient connection, and allows for viewing more detailed system data

Model		BOS-A	
Main Parameter			
Cell Chemistry		LiFePO4	
Module Energy (kWh)		7.68	
Module Nominal Voltage (V)		38.4	
Module Capacity (Ah)		200	
Module Dimension (W/D/H,mm)		601.5*520*135	
Module Weight Approximate (kg)		70	
Battery Module Qty In Series (Optional)		7	1321
System Nominal Voltage (V)		268.8	499.2806.4
System Operating Voltage (V)		235.2~306.6	436.8~569.4705.6~919.8
System Energy (kWh)		53.76	99.84161.28
System Usable Energy (kWh) ¹		48.38	89.85145.15
Charge/Discharge ² Current (A)	Recommend	100	
	Max	160	
Working Temperature (°C)		Charge: 0~55/Discharge: -20~55	
Status Indicator		Yellow: Battery High Voltage Power On Red: Battery System Alarm	
Communication Port		CAN2.0	
Humidity		5%~85%RH	
Altitude		≤3000m	
IP Rating of Enclosure		IP20	
Dimension (W/D/H,mm)		1900x610x610	2350x610x6101900x610x610
Weight Approximate (kg)		558	9851586
Installation Location		Rack Mounting	
Storage Temperature (°C)		0~35	
Recommend Depth of Discharge		90%	
Cycle Life		25±2°C,0.5C/0.5C, EOL70%≥6000	
Warranty ³		10 years	
Certification		CE/IEC62619 /IEC62040/UN38.3/VDE-2510	

1. DC Usable Energy, test conditions: 90% DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.


2. The current is affected by temperature and SOC.

3. The warranty is due whichever reached first of warranty period or life cycle power.


System Backup solution


Backup power duration plan	2 hours		4 hours	
Hybrid inverter power	50KW	80KW	50KW	80KW
Battery model	BOS-A100	BOS-A160	BOS-A100	BOS-A160
Number of batteries	1 pcs	1 pcs	2 pcs	2 pcs

50KW/100KWh

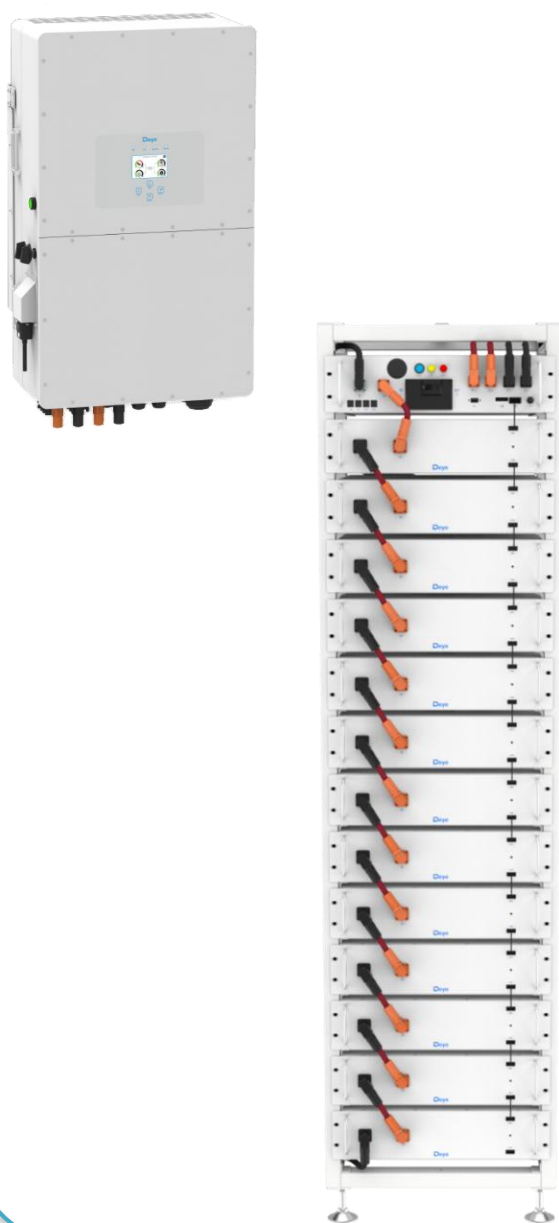


80KW/160KWh

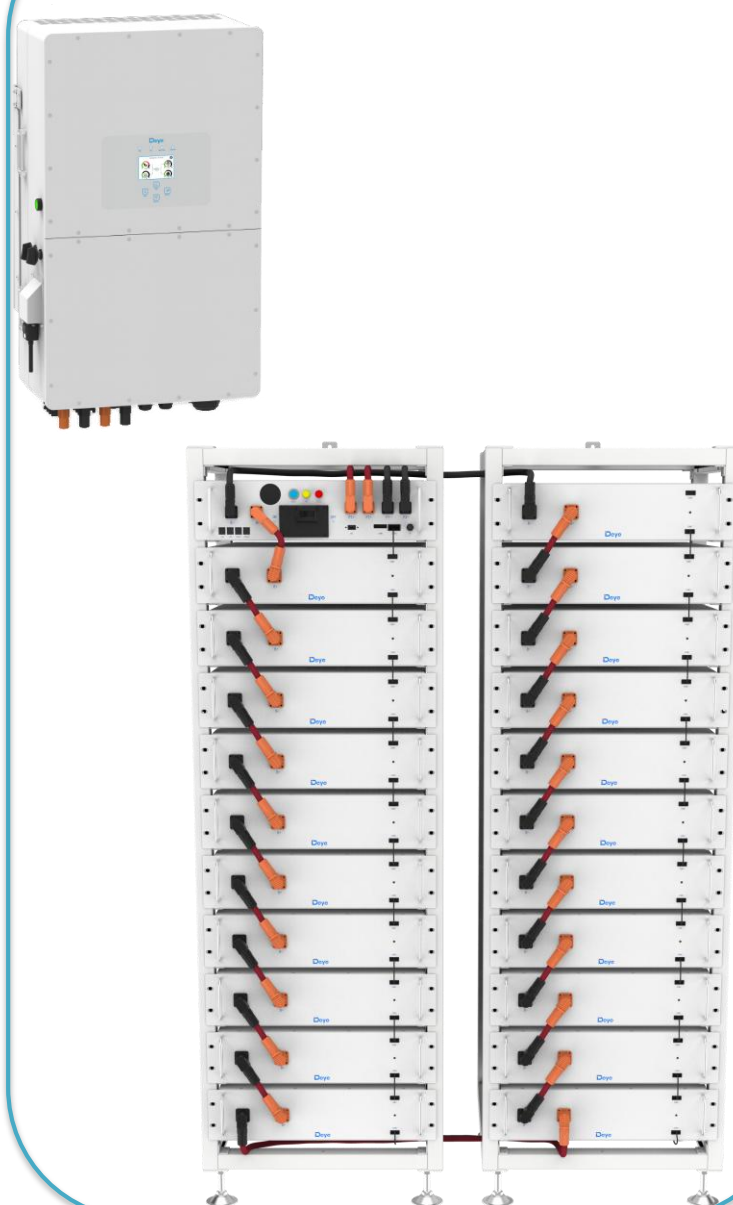

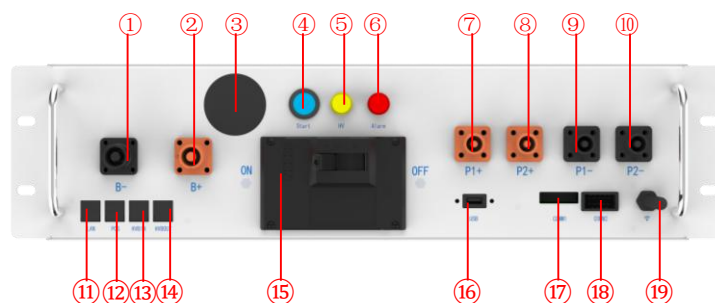


①B-	Connection position of the common negative pole of the battery
②B+	Connection position of the common positive pole of the battery
③LED panel	Displays SOC and fault codes
④START	A start switch of 12VDC power inside the high-voltage control box
⑤HV light indicator	High-voltage hazard indicator
⑥ALRM light indicator	Battery system fault alarm indicator
⑦PCS1+	Connection position of PCS1 positive pole
⑧PCS2+	Connection position of PCS2 positive pole
⑨PCS1-	Connection position of PCS1 negative pole
⑩PCS2-	Connection position of PCS2 negative pole
⑪LAN	Ethernet communication interface
⑫PCS COM	Communication interface with charging and discharging equipment
⑬IN COM	Connection position with previous GE-F-PDU communication input
⑭OUT COM	Connection position with next GE-F-PDU communication output
⑮Air switch	Used to manually control the connection between the battery rack and external devices
⑯USB	BMS upgrade interface and storage expansion interface
⑰COMM1	12VCD power supply port
⑱COMM2	Communicative connection with the first battery module; and providing 12VDC power for the first battery module.
⑲WiFi/ Bluetooth capture stick	Collect WiFi or Bluetooth information

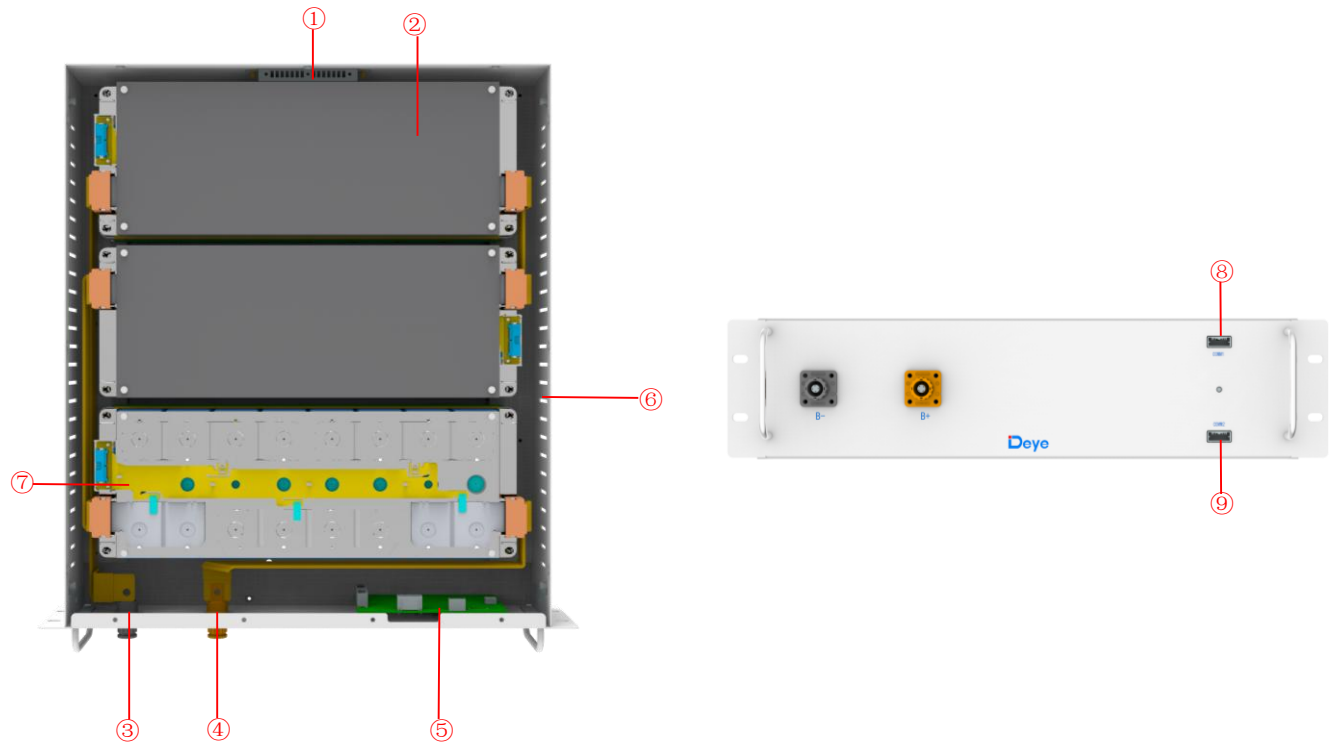

①Fire aerosol	Put out a fire
②Battery module	Provides electrical energy storage and output
③Battery negative-	/
④Battery positive+	/
⑤BMU	Battery monitoring
⑥Air inlet	Cold air inlet
⑦CCS	Cells Contact System
⑧COMM1	12VCD power supply port
⑨COMM2	Communicative connection with the first battery module; and providing 12VDC power for the first battery module.

Typical application cases

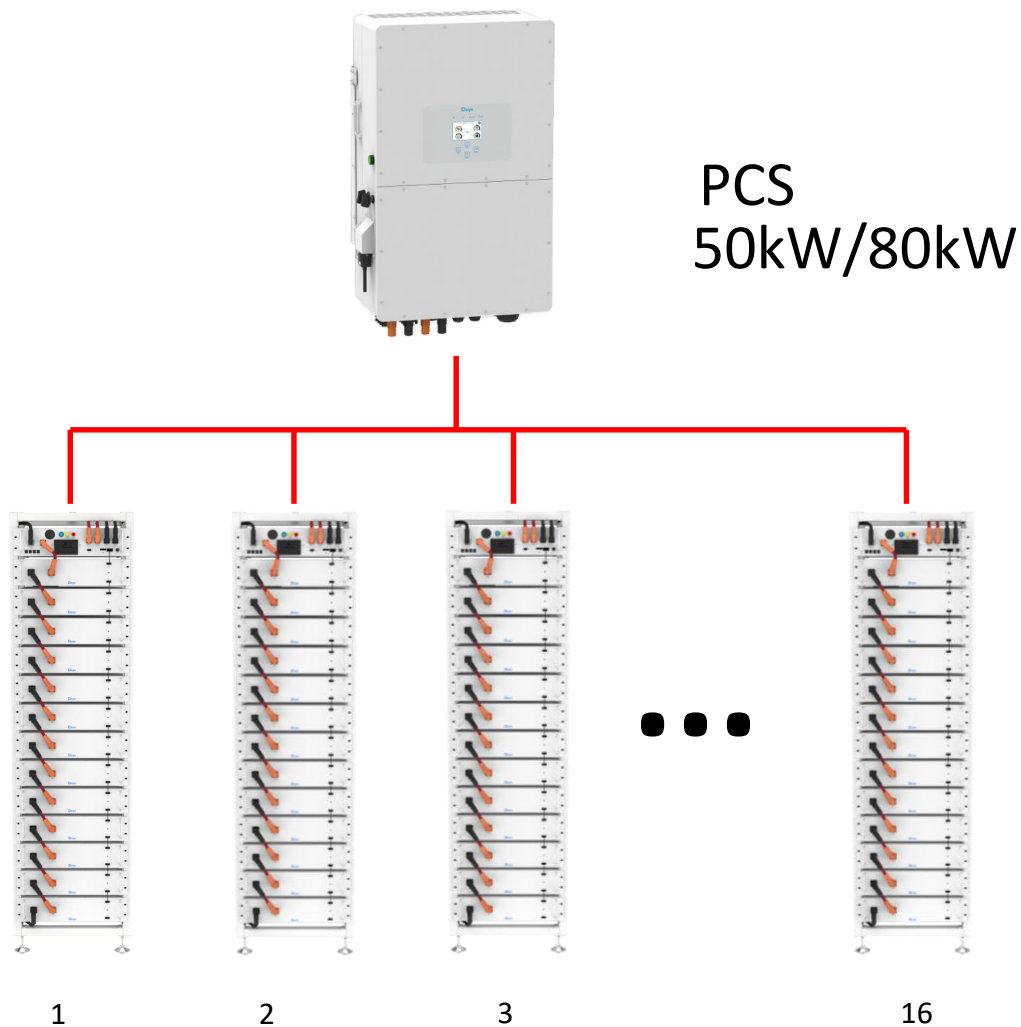

- An 50kW/80kW inverter can carry 1 to 16 high voltage boxes, PDU in parallel.
- A high voltage box can be equipped with 7 battery packs, 13 battery packs or 21 battery packs