

# ECOFLOW

## User Manual

# EcoFlow RIVER Plus

## Extra Battery



### WARNING

1. Please keep the EcoFlow™ RIVER Plus Extra Battery ("RIVER Plus Extra Battery") dry. DO NOT expose it to high heat. Pay attention to all safety instructions when carrying the product.
2. Never disassemble, puncture, shock, crash, or incinerate the product or the accessories.
3. After removing the package, the Extra Battery must be installed with RIVER Plus as soon as possible. Please pay attention to static electricity during the installation process.
4. Recycle and dispose of RIVER Plus Extra Battery in accordance with local laws and regulations.
5. Children or people with disabilities or should use the product under adult supervision.

Contact us:

[www.ecoflow.com](http://www.ecoflow.com)



## Glossary

The following terms are used in this document to indicate various levels of potential harm that may be caused by improper operation.

### NOTICE

The instructions, if not properly followed, may result in property damage and minor physical damage.

### CAUTION

The instructions, if not properly followed, may result in property damage and serious physical damage.

### Warning

The instructions, if not properly followed, may result in property damage, major accident and serious injury.

#### WARNING

**Read the ENTIRE User Manual before operating. Failure to operate the product correctly may result in damage to the product or personal property and cause serious injury. EcoFlow will not assume any legal responsibility. DO NOT use the product with incompatible components or alter the product in any way without following the instructions provided by EcoFlow. Failure to follow these instructions will render EcoFlow after-sales services and the product warranty void. These Safety Guidelines include instructions for safety, operation and maintenance. It is important to read and follow all the instructions and warnings in the user manual before assembly, setup, or product use.**

## Product Disclaimer

Read all safety tips, warning messages, terms of use and disclaimers carefully. Refer to the terms of use and disclaimer at <https://ecoflow.com/pages/terms-of-use> and stickers on the product before use. Users take full responsibility for all usage and operations. Familiarize yourself with the related regulations in your area. You are solely responsible for being aware of all relevant regulations and using EcoFlow products in a way that is compliant.

## Product Safety Guidelines

#### WARNING

**Improper use may result in fire, property damage, or personal injury. Make sure to use the product according to the following safety rules and guidelines.**

## Installation Notes:

1. The RIVER Plus Extra Battery must be installed with RIVER Plus before it can be used. It cannot be used by itself.
2. During the installation process, please pay attention to anti-static protection to ensure that there is no static electricity from the operator or the environment. Static electricity may cause damage to the product.
3. RIVER Plus must be turned off before the installation process.
4. Tighten the screws to ensure the RIVER Plus Extra Battery is firmly attached to RIVER Plus.
5. The RIVER Plus Extra Battery is designed to be used with RIVER Plus power station only. DO NOT connect it with a RIVER or other power stations.

## Product Use:

1. DO NOT expose the product to any liquids. Do not immerse the product in water. DO NOT leave the batteries out in the rain or near a source of moisture. Moisture in the product could cause short circuits, component failure, fires or even explosions.
2. Never use non-EcoFlow parts. Go to <http://www.EcoFlow.com> to purchase new parts. EcoFlow takes no responsibility for any damage caused by the use of non-EcoFlow parts.
3. Never install or remove the RIVER Plus Extra Battery or other modules from the RIVER Plus when it is turned on. DO NOT plug or unplug other modules when the power of the product is turned on, otherwise the power interface may be damaged.
4. DO NOT use the product in environments above 140°F (60°C), it may cause fire or explosion. Using the product in environments below -4°F (-20°C) will severely affect the performance of the product. Allow the product to return to a normal operating temperature before use it.
5. DO NOT use the batteries in strong electrostatic or electromagnetic environments. Otherwise, the battery control board may malfunction and cause a serious accident during use.
6. Never disassemble or puncture the product in any way. Otherwise, it may leak, catch on fire, or explode.
7. DO NOT use the product if it was involved in a crash, accident, or a forceful jolt.
8. If the product falls into the water during use, take the product out immediately and put it in a safe and open area. Keep a safe distance from it until it is completely dry. Never use it again and dispose of it properly as described in the Battery Disposal section below. If the product catches fire, it is recommended to use fire extinguishing equipment in the following order: water or water mist, sand, fire blanket, dry powder fire extinguisher, and carbon dioxide fire extinguisher.
9. DO NOT put the RIVER Plus Extra Battery in a microwave oven or in a pressurized container.
10. DO NOT allow pins, wires or other metal pieces to insert to the RIVER Plus Extra Battery case, outlets or controls. Metal pieces may short circuit the product.
11. Avoid collision. DO NOT place heavy objects on top of the RIVER Plus Extra Battery.
12. If there is dirt on any plug or outlet surface, use a dry cloth to clean it. Otherwise, it will cause abrasion and result in energy loss or inability to charge.
13. You can only connect the RIVER Plus Extra Battery to the RIVER Plus. Do not connect the RIVER Plus Extra Battery to RIVER power station or other products. EcoFlow will not be responsible for any losses or damages caused by failure to follow this instruction.

## Product Charging

1. Always use EcoFlow approved charging cables. EcoFlow will not be responsible for any losses or damages caused by failure to follow this instruction.
2. When charging, please place the product on the ground with no flammable or combustible materials around it. To prevent accidents, never leave it unattended during charging.
3. DO NOT charge a product immediately after a long or heavy load, because the product temperature may have become too high. DO NOT charge a product until it cools down to room temperature.

## Product Storage and Transportation:

1. Keep the product out of the reach of children. If any child accidentally swallows any parts, please seek medical attention immediately.
2. If a low-battery warning appears, charge the battery before storing it. Otherwise, long-term storage may cause damage to the battery. Batteries in the product will enter hibernation mode if they are depleted and stored for a long time. Recharging the product can bring the battery out of hibernation.
3. DO NOT place the product near a heat source, such as inside a car in direct sunlight, a fire source, or an operating stove.
4. Store the product in dry environments. Please keep it away from water.
5. Make sure no objects can fall on or around the product while it's being stored.
6. Never ship a product with a battery power level higher than 30%.

## Product Disposal:

1. Dispose of the RIVER Plus Extra Battery product in specific recycling boxes only after a complete discharge. Batteries are hazardous chemicals. Please strictly follow your local regulations regarding battery disposal and recycling.
2. Dispose of the product if it cannot be powered on after over-discharging.

## Product Maintenance:

1. Store the product in a dry and cool environment, away from any abrasive objects. Temperature for normal use and storage of this product is -4°F to 113°F (-20°C to 45°C) and temperature for optimal use and storage of this product is 68°F to 77°F (20°C to 25°C).
2. If the product is not used for a long time, the battery life may be reduced.
3. Discharge RIVER Plus Extra Battery to 30%, then charge to 85% every 3 months to keep the battery healthy.

## Travel Notice:

Do not bring this product on flights.

# CONTENTS

Extra Battery Usage and Safety Guide .....	1
Extra Battery Installation Instructions .....	2
Ambient Light .....	6
Technical Specifications .....	7
What's in the Box .....	7

## Extra Battery Usage and Safety Guide


### NOTICE

Make sure to turn RIVER Plus off before installing the RIVER Plus Extra Battery. PRESS and HOLD the ON / OFF System Power Button to ensure that the power is off. DO NOT turn RIVER Plus on before installing the bottom cover; the cover is required for proper battery connection.


After the installation is complete, restart the product. DO NOT keep removing the battery frequently as this requires the product to complete a cell balancing process, which will affect user experience.

Users are recommended to purchase RIVER Plus and the RIVER Plus Extra Battery at the same time. If users purchase the RIVER Plus Extra Battery after using the RIVER Plus for a long time, the output of the product will be affected by the balance between the power station and the RIVER Plus Extra Battery (normal process). Please fully charge the product to 100% before using it.

## Extra Battery Module Installation Instructions

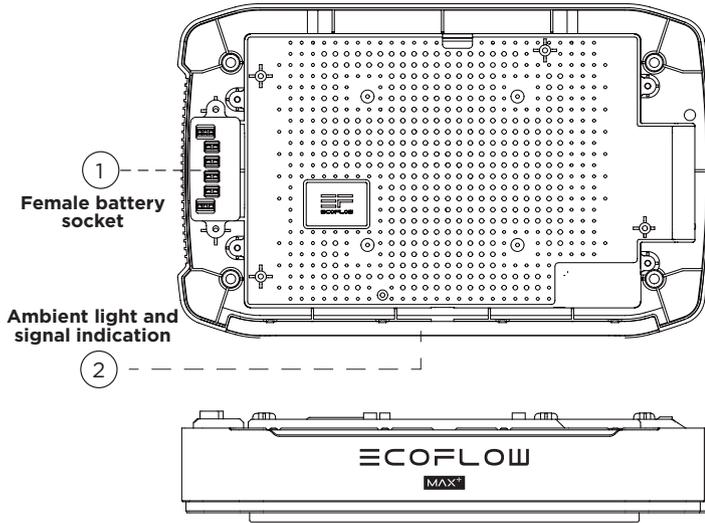


### 1. Female Battery Socket And Installation Instructions

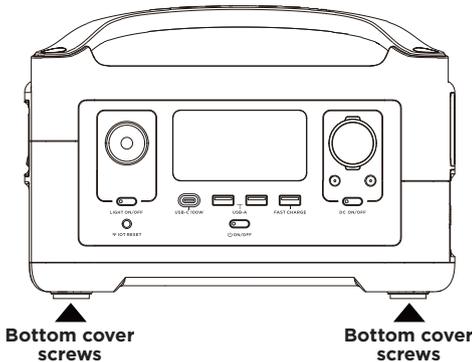


1. Make sure that the RIVER Plus is turned off. Take out the screws from the Extra Battery Module Kit and locate the four screws on the bottom cover.


**Note:** Please pay attention to prevent the buildup of static electricity during the installation process.

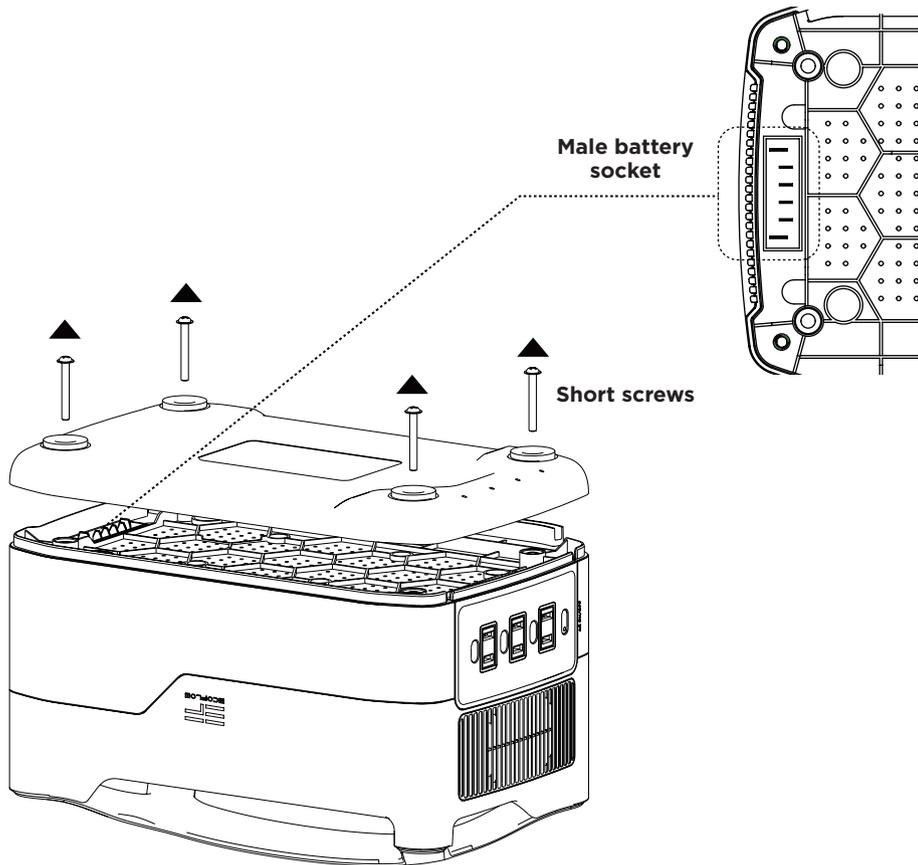

**2.** Unscrew the four short screws according to the figure above before removing the bottom cover. The Male Battery Socket will be visible. Position the Extra Battery according to the figure below. (Note: Do not remove the top cover; only the bottom covers needs removing).

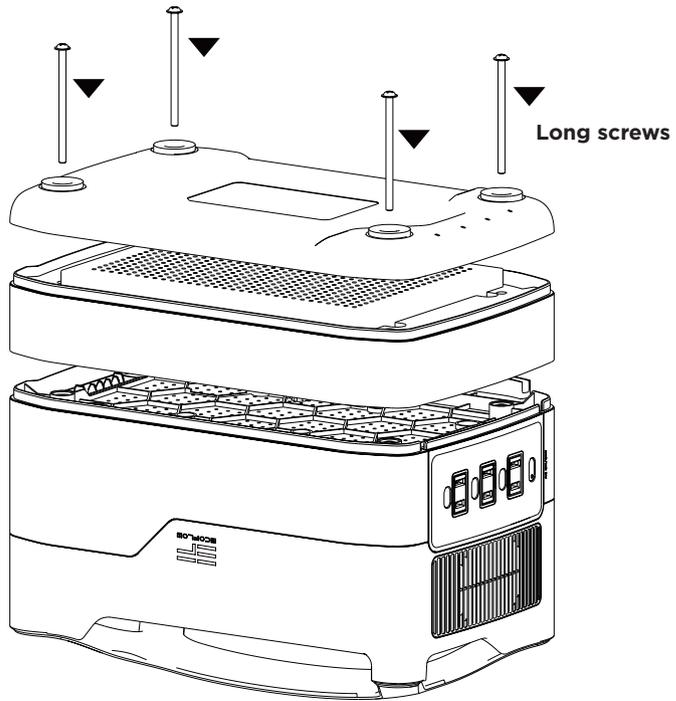

**3.** Align the male and female battery sockets and connect them. Close the bottom cover. Take the four long screws from the Extra Battery Module Kit and screw them securely into place.

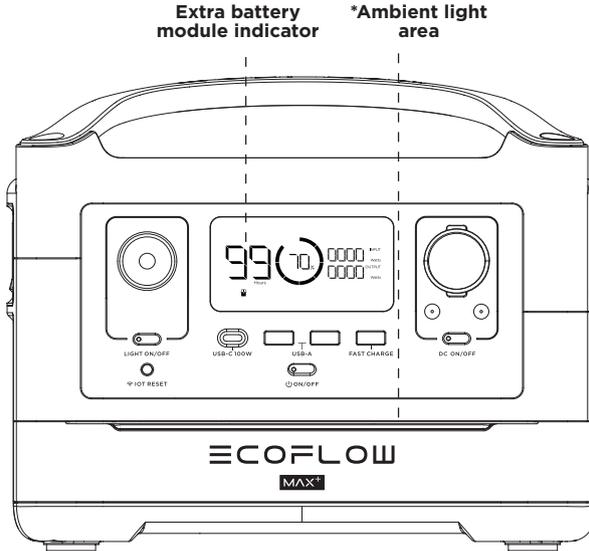

**4.** Turn the RIVER Plus upright and turn it on. The Extra Battery Panel will turn blue. The Extra Battery Indicator will be shown on the RIVER Plus display when it has been installed correctly. Make sure the product is fully charged before use. If the ambient light does not turn on, or the Extra Battery Indicator does not show on the RIVER Plus display, repeat Step 2 and check the product connection.

# Ambient Light

## 1. Status Signals

	Power On: The blue light will move from the middle to the sides of the panel.
	Power Off: The blue light will move from the sides to the middle of the panel.
	Charging: The blue light will move from left to right of the panel, repeatedly.

## 2. Customizing the Ambient Light



Enter the Module Settings on the EcoFlow app to access ambient light features.

1. The ambient light can be turned on / off, kept on, or put on a standby mode.
2. Select the ambient light color.
3. Adjust the brightness of the light.
4. Select the lighting mode. (There are five unique lighting modes to choose from).

## Technical Specifications

### General Specs


Net Weight	5.7 lbs (2.6kg)
Dimensions	11.2 x 7 x 2.3in (28.5 x 18 x 5.9cm)
Pack Capacity	360Wh (12.5Ah, 28.8V)
Single Cell Equivalent Capacity	100,000mAh @ 3.6V
Testing and certification	UL Standard, CE, FCC, RoHS, RCM

### Battery


Cell Chemistry	Lithium-ion
Discharge Temperature*	-4°F to 140°F (±5°F), -20°C to 60°C (±3°C)
Charge Temperature*	32°F to 113°F (±5°F), 0 to 45°C (±3°C)
Shelf Life	1 Year (after fully charging the device)
Cycle Life	800 Cycles to 80%+ capacity

\*Please Note: The following information has been obtained under supervised test conditions.


## What's in the Box



**RIVER Plus  
Extra Battery**



**4 Long Screws**



**Cross-Head Screw  
DRIVER Plus**



**User Manual and  
Warranty Card**

EcoFlow™ is a trademark of Shenzhen EcoFlow Technology Limited (abbreviated as “EcoFlow”) and its affiliated companies.

# ≡COFLOW

ユーザーマニュアル

## EcoFlow RIVER Plus 専用エクストラバッテリー



ホームページ：  
<https://jp.ecoflow.com/>



1. 高温・多湿を避け、直射日光の当たらない場所で保管してください。
2. 分解・解体・改造・焼却はしないでください。また、強い衝撃を避け、変形や変色が見られる場合は使用を中止してください。
3. 廃棄場所の規制に従って、正しくリサイクルまたは廃棄してください。

# 製品に関する安全上の注意事項

## 免責事項

以下利用規約 & プライバシーポリシーをお読みになった以上、EcoFlow製品をご利用ください。

利用規約： <https://jp.ecoflow.com/pages/terms-of-use>

プライバシーポリシー： <https://jp.ecoflow.com/pages/privacy-policy>

EcoFlow製品、EcoFlow専用アプリケーション、EcoFlowのサービスをご利用時点でプライバシーポリシーと利用規約に同意したものとします。

## 警告

間違えた使い方により、火災や物・人身の損害に繋がる恐れがあります。下記の安全に関する説明に従って製品を使用してください。

## 製品を使用する際は、下記の注意事項に従って安全に使用してください

1. 製品を使用する前に、必ず本マニュアルをお読みください。
2. 小さなお子様だけの使用は避け、お子様の近くで使用する場合も、十分安全に配慮して使用してください。
3. 製品のポートに指など身体の一部および異物を入れないでください。また、濡れた手で製品を操作・使用しないでください。
4. 付属の充電ケーブルを含む弊社のアクセサリ以外は、火災・感電・破損の恐れがあるので使用しないでください。
5. 本体の冷却ファンを塞ぐ、直前に物を置くなどして、空気の流入・排出を妨がないように使用してください。
6. 製品が損傷(変形・変色・正常に作動しない)した場合、使用しないでください。また、改造されたバッテリーパックや電気製品は接続・使用しないでください。
7. 破損または破損の恐れのあるコード、プラグ、ケーブルなどは製品に接続しないでください。
8. サービスまたは修理が必要な場合は、お客様ご自身で製品を分解・修理はせず、弊社サポートセンターまでご連絡ください。
9. 輸送の際は製品から全てのプラグ、ケーブル、コネクタ類を外し、電源をオフにしてから安全に梱包してください。
10. 充電は高温多湿を避け、換気の良い場所で行ってください。また、充電が完了したら、速やかにプラグをコンセントから抜き、充電ケーブルを取り外してください。
11. 破損など不適切な条件下では、バッテリーから電解液が漏れる恐れがあります。万一電解液が漏れた場合は、直接触らないでください。誤って皮膚に触れたり、目に入ったりした場合、十分に流水で洗い流して、直ちに専門医の診断を受けてください。

12. 直射日光の当たる場所や、夏場の車内など極端に高温な場所に長時間放置・保管しないでください。
13. 製品の修理は弊社サポートセンター、もしくは弊社が適切な技術を有すると認められた有資格者のみが行ってください。
14. 家庭用 AC コンセントから充電する場合、日本仕様は 100V、アメリカ仕様は 120V のみ対応します。これ以上高い電圧で充電すると、故障や破損の原因となります。
15. 不適切な使用・用法、お客様の瑕疵による破損の場合、無料・有償を問わず修理サービスを提供できない場合があります。
16. デバイスのモジュールを脱着するには、電源を切ってから行ってください。電源を入れたままモジュールを脱着すると電源コネクタが破損する恐れがあります。
17. 製品の放電温度範囲は-20°C~60°Cで、その温度範囲内でご使用ください。対応範囲外で使用されると、バッテリーが発火したり、性能が低下したりする恐れに繋がります。
18. 強磁界環境での使用をお控えください。本製品に影響を与え、保護システムが機能しなくなり不具合が起きる恐れに繋がります。
19. いかなる理由であっても、本デバイスを解体・分解・改造・修理しないでください。火災や爆発の原因となります。
20. ぶつかけたり、落としたりして本製品に衝撃を与えないでください。本製品の上に重いものを置かないでください。
21. 本製品は防水仕様ではありません。誤って水に落ちてしまうと故障になり使用不可になります。浸水された場合は、製品が乾燥まで広い安全な場所に放置し、当地廃棄方法に従って処理してください。製品が発火した場合は、水、ミスト、砂、防火ブランケット、乾燥粉末消火器または二酸化炭素消火器で消火してください。
22. ワイヤーなどの金属物で短絡させてはいけません。
23. コネクタに汚れがある場合は、接触不良による充電不可にならないよう、乾いた布で拭いてください。

## 製品の充電

1. EcoFlow RIVER シリーズポータブル電源を充電する際、必ず専用のACケーブルをご使用ください。その他のACケーブル使用時の不具合、破損、発火およびそれらに起因する損害は、予めご了承の上お客様の責任においてお使いください。

2. 充電する際、本体はセメント舗装のような周囲に引火性・可燃性物質のない地面に置いてください。充電中は、思わぬ事故が起らないように、その場から離れないでください。
3. 持続的な全負荷放電の後、電池が過熱状態になっている場合、製品を室温まで冷却させてから充電することをおすすめします。そのまま充電すると、充電ができない状態になることがあります。充電に適した環境温度は0°C～45°Cです。最も望ましい環境温度(20°C～25°C)で充電することで、電池の寿命を延ばすことができます。

## 製品の保管と輸送

1. 本製品は子供の手の届かない場所に保管してください。子供が部品を誤食してしまった場合、直ちに医師の診断を受けてください。
2. 使用後、ディスプレイに低電量の表示が出た場合、充電してから収納してください。充電せずに長期間保管すると、電池の破損に繋がる恐れがあります。残量が極めて低く、かつ長期間使用されない場合、電池はディープスリープモードに入ります。電池をディープスリープモードから活性化するには、製品を充電する必要があります。
3. 本製品を熱源の近く(例：直射日光の当たる車内、発火源や加熱炉など)に置かないでください。
4. 本製品は乾燥した環境で保管してください。本製品を水に浸したり、水漏れしやすい場所に置いたりしないでください。
5. 本製品をメガネ、腕時計、金属ネックレス、ピンやその他金属製品と一緒に保管・輸送しないでください。
6. 本製品を電池残量30%以上の状態で輸送することをお控えください。

## 電池の廃棄

電池は完全に放電させた後、指定の電池回収箱に廃棄してください。電池は危険化学品ですので、一般ゴミに出さないでください。詳細については、所在地の電池回収・廃棄の法律・法規に従ってください。過放電後はデバイスが正常に使用できかねるため、廃棄してください。

## 製品のメンテナンス

1. 製品を45°C以上、または-20°C以下の室温環境で保管しないでください。
2. バッテリーの活性を保つために、約3か月ごとに1回RIVER Plus 専用エクストラバッテリーを30%まで放電してから、85%まで充電してください。
3. デバイスを長期間使用しないと、性能に影響を及ぼします。ご了承の上、ご使用ください。

## 機内持ち込みについて

本製品は、航空機内への持ち込みはできません。

## はじめに・本書の内容

この度はEcoFlow RIVER Plus専用エクストラバッテリーをご購入いただき、誠にありがとうございます。

本製品は、搭載されている電池の寿命を延ばし、安全にお使いいただくため、出荷時は電源がオフになっています。お使いになる際には、電源ボタンを押して、電源をオンにしてください。

長期間お使いにならない場合は、安全のために本体の充電容量を50～70%程度にし、電源ボタンを長押しして電源をオフにしてください。また、高温・低温・多湿を避け、直射日光の当たらない風通しの良い場所に保管してください。

安全上、約3か月ごとに1回電源をオンにして適切な充電容量を確認・維持し、各部の機能に異常がないか確認してください。

※製品内容に不足がある場合は、弊社サポートセンターsupport.jp@ecoflow.comまでご連絡ください。

## 本製品の使用、メンテナンスと安全性に関して

ご使用前に本マニュアルをよくお読みいただき、説明に従って使用してください。

# 目次

<安全ガイド>RIVER Plus専用エクストラバッテリーの使用方法、メンテナンスについて	2
専用エクストラバッテリーの取り付け方法	3
ムードライトエリア	7
製品仕様	8
同梱物	8

# <安全ガイド> RIVER Plus専用エクストラバッテリーの 使用方法、メンテナンスについて

RIVER Plus専用エクストラバッテリーは高品質のリチウムイオンバッテリーを使用しています。安全にご使用いただくためにもこの説明書をよくお読みください。マニュアルの指示に従いエクストラバッテリーを着脱してください。

## 充電方法について

RIVER Plus専用エクストラバッテリー単体で充電&放電することはできません。ポータブル電源RIVER Plus本体と取付けて、本体に充電するとRIVER Plus専用エクストラバッテリーも充電されます。

取付方法は次のページ「取り付け方法」をご参照ください。


### ちゅうい

エクストラバッテリーを取り付ける前に、必ずRIVER Plus本体の電源を切ってください。電源はON / OFF電源ボタンを押し続けることで電源を切ることができます。接触不良を防ぐため、底部カバーを取り付ける前に、RIVER Plus本体の電源を入れな  
いでください。エクストラバッテリーの着脱が完了次第本体を再起動してください。

使用中はエクストラバッテリーを外さないでください。使用中にエクストラバッテリーを外すと機器がパワーバランス機能を何度も実行するため異常がでることがあります。本体を長期間使用した後に新しいエクストラバッテリーを取り付けると出力に影響  
が出る可能性があります。RIVER Plusとエクストラバッテリーは同時購入することをお勧めします。

初めてご使用の場合、RIVER Plusの電源をオフにしてから、エクストラバッテリーを取り付けてください。装着後、RIVER Plusは  
エクストラバッテリーと一体化のポータブル電源になります。満充電してから、正常に作動することができます。

# 専用エクストラバッテリーの取り付け方法

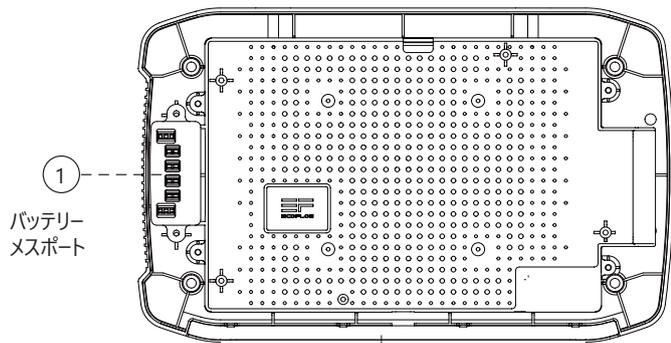


①  
バッテリー  
メスポート

②  
ムードライトエリア



## 取り付け方法

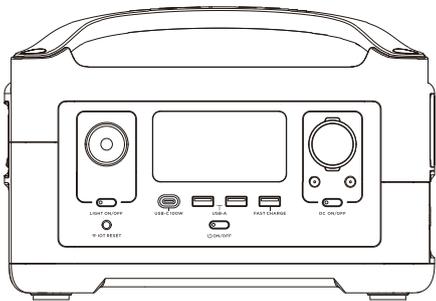


底蓋ねじ


底蓋ねじ

1. 本体の電源がオフになっていることを確認してください。エクストラバッテリーのドライバーを取り出し、底蓋のねじ4本を見つけてください。

注意：取り付け作業中は、静電気が発生しないようにご注意ください。

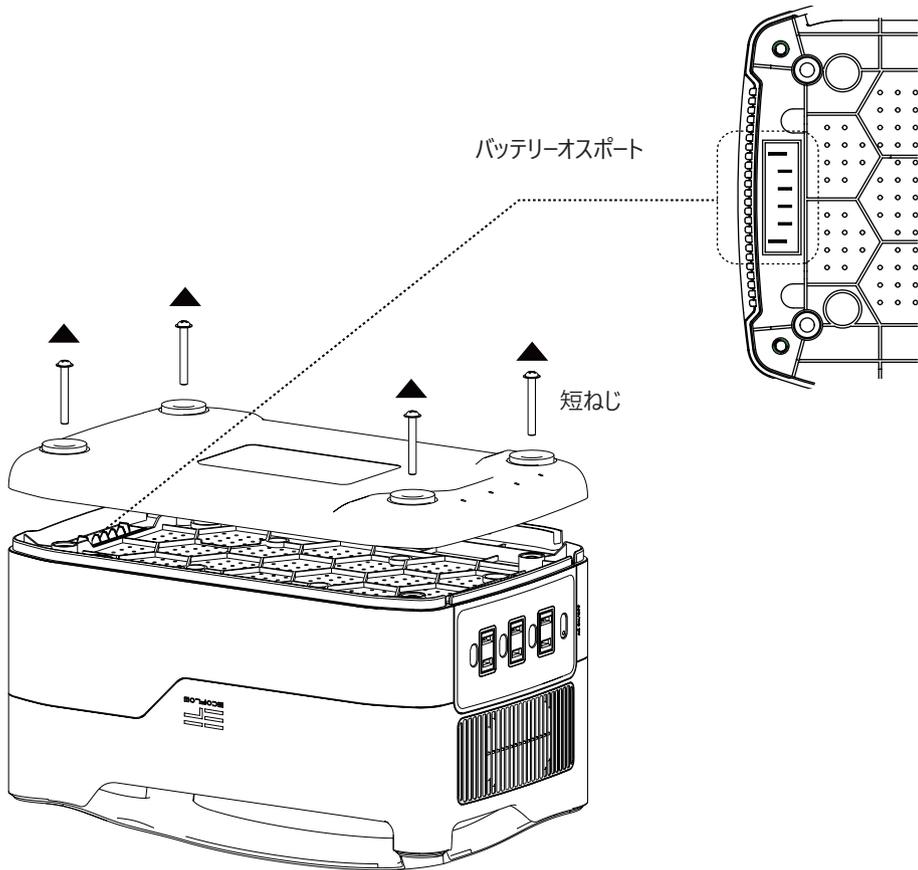


2. 図のように、ねじ4本を取り外して底蓋を開けると、バッテリーオスポートが見えます。エクストラバッテリーを接続するのはこの部分です（底蓋だけを開けてください。上部の蓋を開ける必要はありません）。

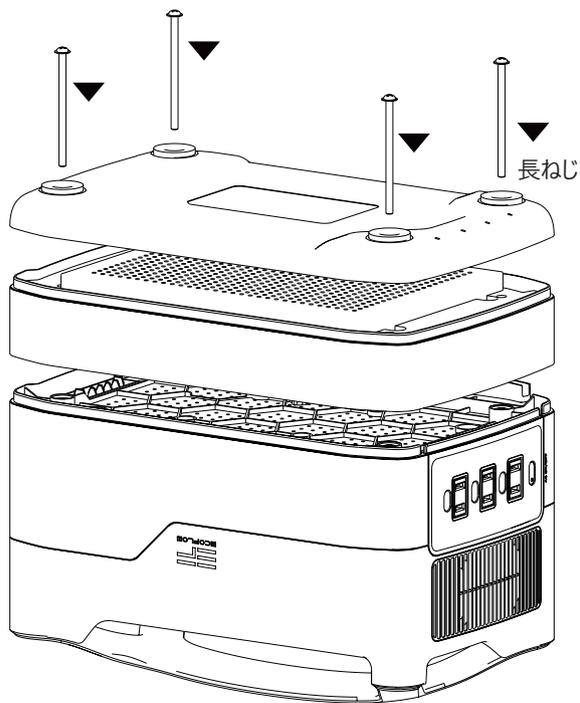

3. エキストラバッテリーをメスポートが本体のオスポートに接続されるように設置し、底蓋を閉め、長ねじ 4本を締めて固定してください。

バッテリー合体  
インジケータ

ムードライトエリア

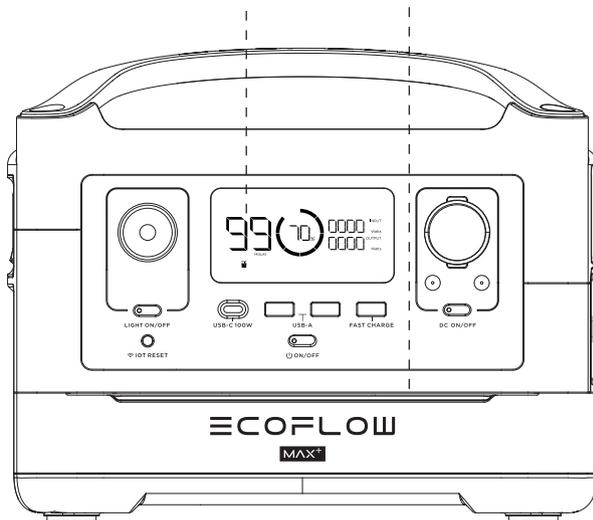

4. 本体を正面向きに戻して、電源をオンにします。エクストラバッテリーのムードライトエリアの青色ライトがBreathモードで点灯し、本体のディスプレイにバッテリー合体インジケータが表示されたら、取り付け完了です。必ず本体をフル充電してから使用してください。もし上記のライトやインジケータが点灯、表示されない場合は、ステップ 2 からやり直してください。

# ムードライトエリアについて

## 1. ライトのインジケータについて

	電源オン時のインジケータ：青色ライトが中央から両側へ点灯します。
	電源オフ時のインジケータ：青色ライトが両側から中央へ点灯します。
	充電インジケータ：青色ライトが左から右へ繰り返し点灯します。

## 2. ムードライト設定について



アプリの「ムードライト設定」をクリックすると、ライトの色・輝度・モードを設定できます。

1. ムードライトをオン/オフ、または常時点灯にすることができます。
2. お好きな色を選択できます。
3. 明るさを調整できます。
4. モードの設定も可能です。お好きな色を選択し、多彩なライトを楽しむことができます。

## 製品仕様

### 基本仕様


本体重量	5.7lbs (2.6kg)
寸法	11.2 x 7 x 2.3in (28.5 x 18 x 5.9cm)
バッテリー容量	360Wh (28.8V, 12.5Ah)
単一セルの等価容量	100,000mAh @ 3.6V
認証	GB4943 RoHS

### 電池


電池タイプ	三元素リチウムイオン
放電温度範囲	-4-140°F +/-5°F (-20-60°C +/-3°C)
充電温度範囲	32-113°F +/-5°F (0-45°C +/-3°C)
保証期間	2年間
使用サイクル	800+

本製品のデザインおよび仕様等に関しましては品質改良のため予告なしに変更する場合があります。


## 同梱物



エクストラバッテリー本体



4個 長ネジ



十字ドライバー



ユーザーマニュアル&保証カード

# ECOFLOW

## 用户手册

# EcoFlow RIVER Plus

## 加电包



警告

1. 请保持EcoFlow™ RIVER Plus加电包(以下简称RIVER Plus加电包)产品及配件干燥, 远离火源。
2. 请勿拆解、碰撞产品以及对产品端口做违规操作。
3. 拆除包装后, 必须及时与RIVER Plus安装到一起, 安装过程请注意防静电。
4. 请根据当地法律规定回收和弃置产品。
5. 使用和移动产品时请注意安全, 避免砸伤。
6. 儿童或特殊人群要注意在监管人的保护下进行使用。

联系我们:

[www.ecoflow.com](http://www.ecoflow.com)

# 词汇表

本产品使用以下词条对因操作不当可能带来的潜在危险加以分级说明。

## 注意

如果不遵循说明进行操作，可能会导致财产损失和轻微伤害。

## 小心

如果不遵循说明进行操作，可能会导致财产损失和较严重伤害。

## 警告

如果不遵循说明进行操作，可能会导致财产损失、重大事故和严重伤害。

### 警告

通过阅读整个用户手册,熟悉产品的功能后再进行操作。如果没有正确操作本产品可能会对自身或他人造成严重伤害,或者导致产品损坏和财产损失。切勿使用非EcoFlow提供或建议的部件,必须严格遵守EcoFlow的指引安装和使用产品,否则无法获得EcoFlow售后服务。本指引文档包含安全、操作和维护等说明。在进行组装、设置和使用之前务必仔细阅读用户手册。

## 产品免责声明

请仔细阅读所有安全提示,警告消息,使用条款和免责声明。使用之前,请参阅 <https://ecoflow.com/pages/terms-of-use> 上的使用条款和免责声明以及产品上的标签。用户对所有使用和操作承担全部责任。熟悉您所在地区的相关法规。您有责任了解所有相关法规并以合规的方式使用EcoFlow产品。

# 产品安全使用指引

### 警告

不正确地使用,可能会导致火灾、物品或人身伤害。务必参照如下安全指引使用产品。

## 安装说明:

1. 加电包必须与RIVER Plus安装组合后才能使用,无法单独使用。
2. 安装过程中必须注意防静电保护,确保人体及安装区域没有静电,静电可能会导致产品受损。
3. 安装前必须确保RIVER Plus为关机状态。
4. 安装时必须扭紧螺丝,保证RIVER Plus与加电包锁紧。
5. RIVER Plus加电包只能与RIVER Plus兼容。请勿将它与RIVER或其他电源产品连接使用。

## 产品使用:

1. 严禁使产品接触任何液体,请勿将产品浸入水中或将其弄湿。切勿在雨中或者潮湿的环境中使用电源产品,否则引发电池自燃,甚至可能引发爆炸。
2. 严禁使用非官方提供的部件。如需更换,请到EcoFlow官网查询相关购买信息。因使用非EcoFlow官方提供的产品而引发的产品事故、故障,EcoFlow概不负责。
3. 在将RIVER Plus加电包或其它模块安装拔出RIVER Plus之前,请保持RIVER Plus的电源关闭。请勿在RIVER Plus电源打开的状态下拔插RIVER Plus加电包或其它模块,否则可能损坏电源接口。
4. 温度过高(高于60°C),可能会引起电池着火,甚至爆炸。温度过低(低于-20°C),产品性能将会严重降低,可能会出现不能满足正常使用要求。恢复常温后可以正常使用。
5. 禁止在强静电或者磁场环境中使用机器,可能出现工作不正常的情况。否则,机器的一些保护功能可能失灵,从而导致机器发生严重故障。
6. 禁止以任何方式拆解或用尖利物体刺破产品。否则,将会引起产品故障着火甚至爆炸。
7. 机器遭遇强烈的摔落或受外力撞击,不得再次使用。
8. 如果在产品使用过程中意外坠入水中,将其置于安全的开阔区域,这时应远离产品直至产品完全晾干。晾干的产品不得再次使用,应该按照本文的废弃方法妥善处理。若产品发生起火,推荐按以下顺序使用灭火器材:水或水雾、沙、灭火毯、干粉灭火剂、二氧化碳灭火器。
9. 请勿将本产品放置于微波炉或压力锅中。
10. 禁止用导线或其它金属物体致使产品短路。
11. 请勿撞击机器。请勿在机器上放置重物。
12. 如果本产品的接口有污物,使用干布擦干净。否则会造成接触不良,从而引起能量损耗或无法充电。

## 产品充电:

1. 机器必须使用EcoFlow官方指定的充电线进行充电。对于使用非EcoFlow官方指定的充电线进行充电所造成的一切后果, EcoFlow将不予负责。
2. 充电时请将机器放置在水泥等周围无易燃、可燃物的地面。产品充电时请在场看管,以防止意外发生。
3. 持续满载放电后,产品电池如果处于高温状态,建议待机器降至室温后再进行充电。

## 产品存储和运输:

1. 请将机器存放在儿童接触不到的地方。如果儿童不小心吞咽零部件,应立即寻求医疗救助。
2. 如果使用结束后机器提示严重低电量,请充电后再存放。否则长时间存放可能导致产品内部的电池造成损坏。若机器电池电量严重不足且闲置时间过长,则电池将进入深度睡眠模式,若需要将电池从深度睡眠中唤醒,需对机器充电。
3. 禁止将机器放在靠近热源的地方,比如阳光直射的车内、火源或加热炉。
4. 存放机器的环境应保持干燥。请勿将机器置于水中或者可能会漏水的地方。
5. 禁止将机器与眼镜、手表、金属项链、发夹或者其他金属物体一起贮存或运输。
6. 若需要使用快递、物流运输本产品,请先将产品电量降低至30%。

## 产品电池废弃:

1. 务必将机器电池彻底放完后,才将机器电池置于指定的电池回收箱中。电池是危险化学品,严禁废置于普通垃圾箱。相关细节,请遵循当地电池回收和弃置的法律法规。
2. 过放后电池无法启动,请按废弃处理。

## 产品保养:

1. 电池的使用/存储环境温度为-20°C至45°C,最佳使用/存储环境温度为20°C至25°C,可大幅度延长电池的使用寿命。
2. 若长期闲置机器,将会对其性能造成影响。
3. 请每隔3个月为RIVER Plus 加电包充放电一次,即先将电池放电至30%,然后充电至85%。这样可以保持电池活性。

## 登机注意事项:

本产品无法携带登机。

# 目录

RIVER Plus 加电包的使用、保养和安全指南	1
RIVER Plus 加电包安装说明	2
氛围灯区域	6
技术参数	7
包装内容	7

# RIVER Plus 加电包的使用、保养和安全指南


## 恭喜您!

恭喜您成为EcoFlow用户! 这本简短的手册将给您带来帮助, 请花一点时间阅读手册, 并按照手册上的说明安装加电包, 掌握使用方法!


## 注意!

安装加电包之前请务必关闭RIVER Plus, 您需要按住ON/OFF电源键, 确保断电, 不可以没安装完底盖前对RIVER Plus进行开机, 以免接触不良。安装完成以后, 重新启动好机器即可, 享受高容量给RIVER Plus带来的全新体验。使用过程中请不要经常拆卸电池, 否则机器会反复执行电量均衡功能, 影响使用体验。RIVER Plus使用很长时间后, 再购买安装加电包, 输出会受到新旧电池均衡无法一致的影响, 而对使用体验有所下降, 属于正常现象, 推荐RIVER Plus加电包同时购买。(在您进一步阅读与操作之前, 请先将产品的电量充至100%!)

# RIVER Plus 加电包安装说明

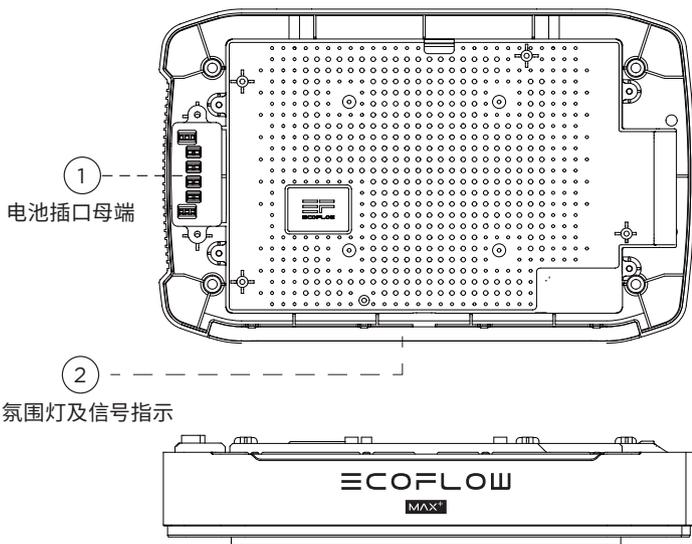


## 1. 电池插口母端及安装说明

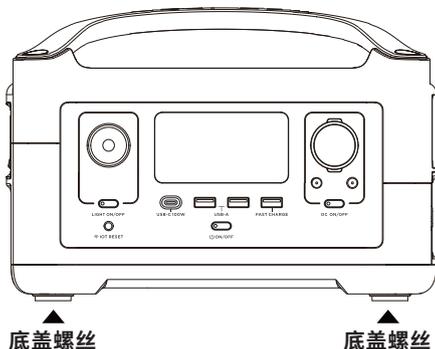


1. 当您拿到RIVER Plus请确保机器处于关机状态，取出加电包的螺丝刀，找到底盖上的四个螺丝。

注意:安装过程中注意防静电。

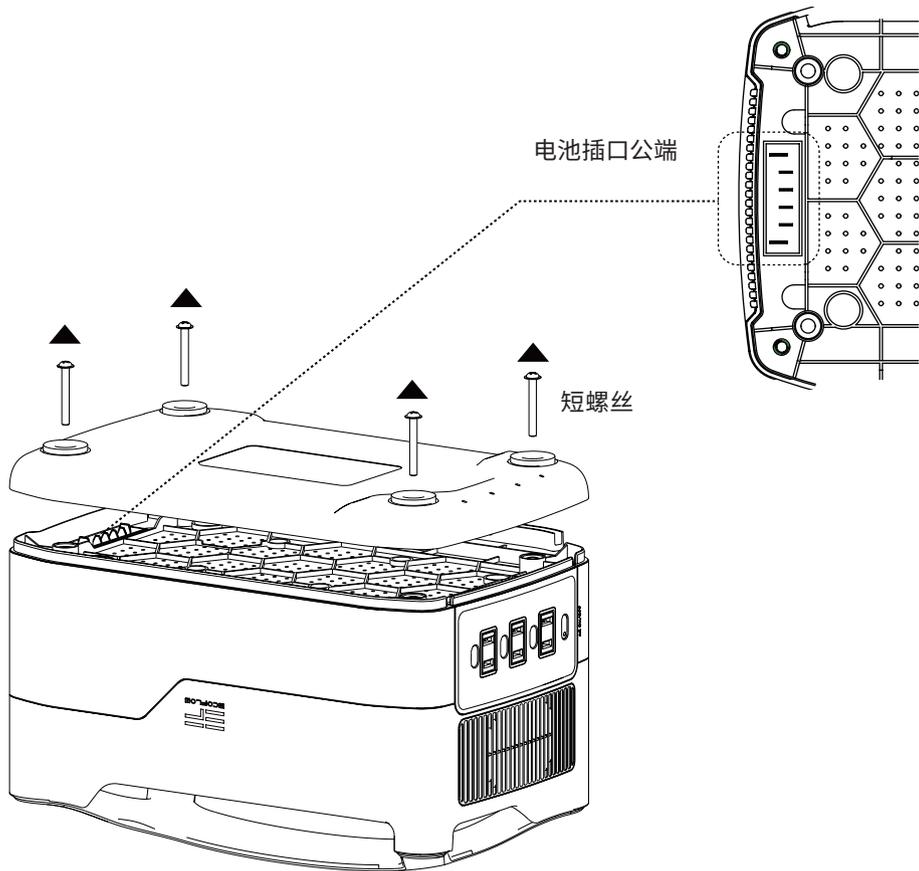


2.按照图示将四个螺丝进行解除,然后将底部盖子取出,您就可以看到电池插座的公端,加电包的对接位置就如图所示。(注意只需要将底部盖子取出,顶部的盖子不需要拆卸)

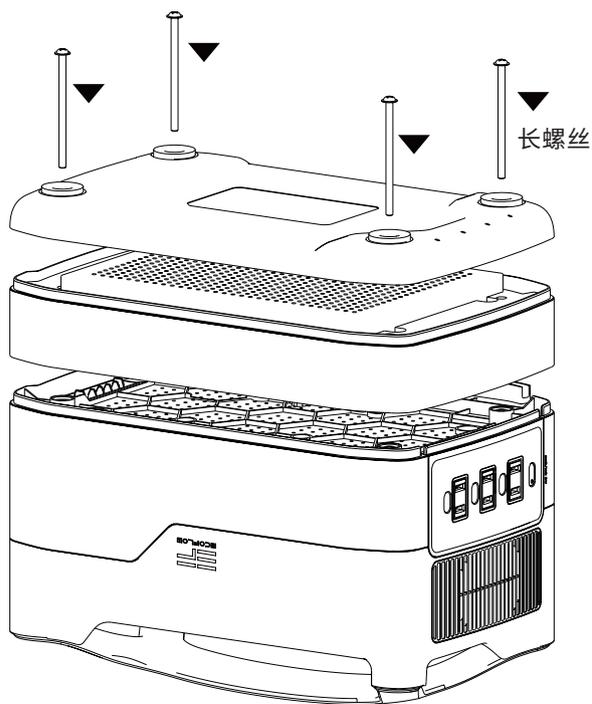

3.将加电包公座对准母座，插接在主机上，然后盖上盖子，再将包装中四枚长螺丝取出，装在螺丝孔中进行固定。

加电包指示灯 \*氛围灯区域

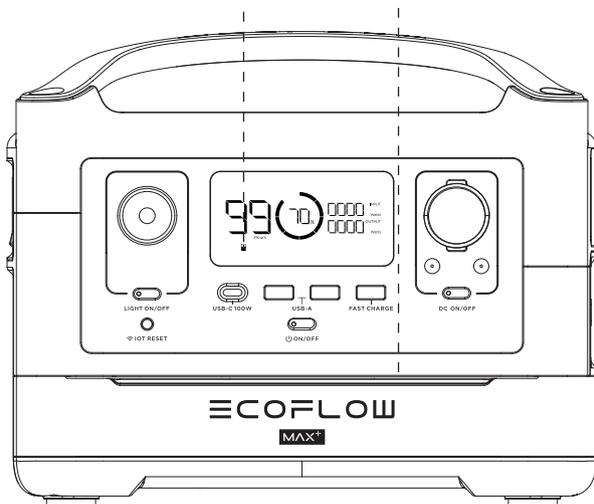

4.将RIVER Plus回到正面，然后开启机器，加电包氛围灯发出蓝色呼吸提示灯，主机显示器上加电包图标点亮即电池激活成功。请务必将设备充满电之后再使用。如果没有以上表现，请重复第二步之后的操作，检查接口，重新安装即可。

# \*氛围灯区域

## 1. 氛围灯固定警示信号灯解读

	开机指示灯: 蓝色灯光由中间向两边散开。
	关机指示灯: 蓝色灯光由两边向中间递减。
	充电指示灯: 蓝色灯光由左向右亮灯, 不断重复。

## 2. 氛围灯自定义信号灯



可通过APP对以下功能进行设置。

点击模块设置进入, 可以对各项功能进行设置。

1. 可以对氛围灯进行开、关和常亮(待机状态下也可常亮氛围灯) 设置。
2. 可以选择您想要的颜色进行勾选设置。
3. 可以对亮度进行调整设置。
4. 还可以对灯光的模式进行设置, 有默认模式、呼吸模式、流动模式、动感模式和彩虹模式, 选择你喜欢的颜色, 就可以享受氛围灯给您带来的乐趣。

# 技术参数


## 基本规格

净重	5.7lbs (2.6kg)
尺寸	11.2 x 7 x 2.3in (28.5 x 18 x 5.9cm)
容量	360Wh (28.8V 12.5Ah)
单节电池等效容量	100,000mAh @ 3.6V
认证标准	GB4943 RoHS <span>合格证   已检验</span>


## 电池

电池种类	锂电池
放电温度	-4°F 至 140°F $\pm$ 5°F (-20°C 至 60°C $\pm$ 3°C)
充电温度	32°F 至 113°F $\pm$ 5°F (0°C 至 45°C $\pm$ 3°C)
货架放置时间	1年 (满电状态)
循环寿命	800次循环后仍能保留80%以上初始容量


# 包装内容



RIVER Plus 加电包



4枚长螺丝



十字螺丝刀



用户手册&保修卡

EcoFlow™ 是深圳市正浩创新科技有限公司及其关联公司的商标。