



1. PNC360S Product Overview

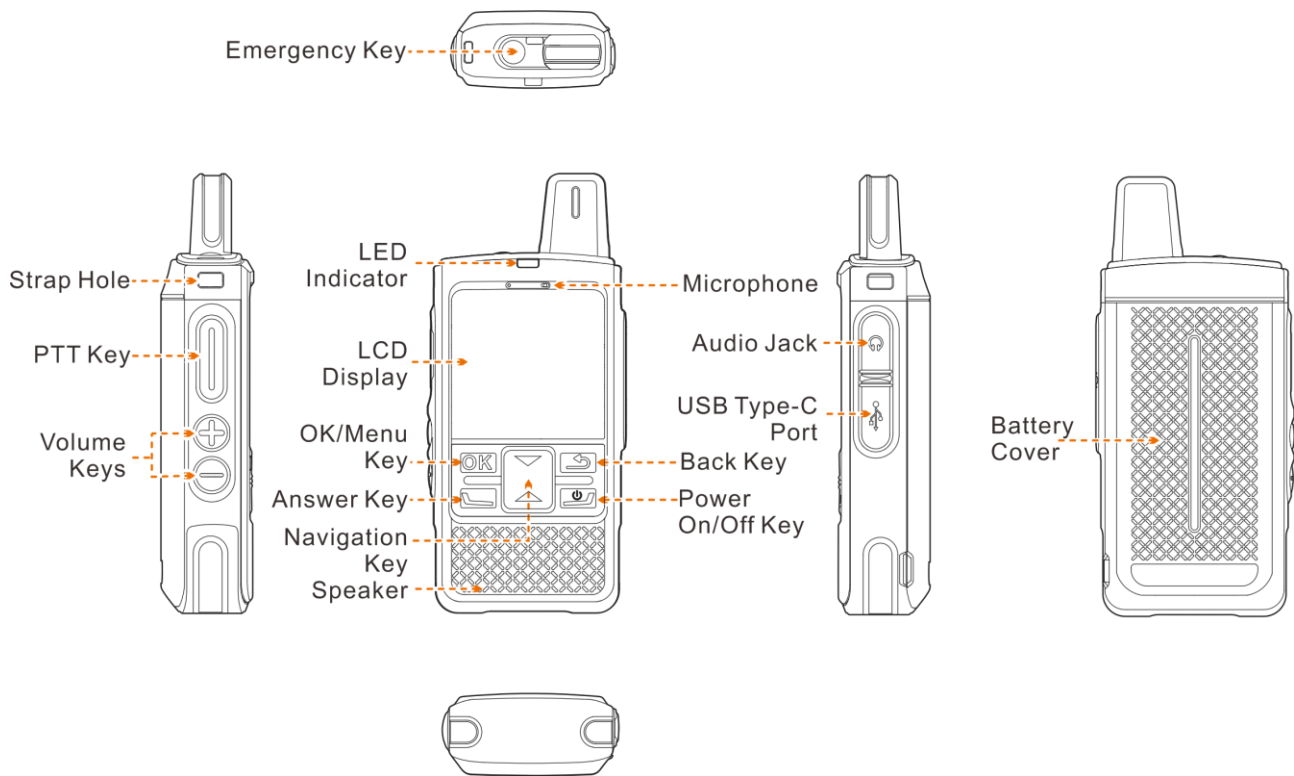

2. Before Use

2.1 Installing the Nano SIM Card


1. Remove the battery cover with a proper tool.

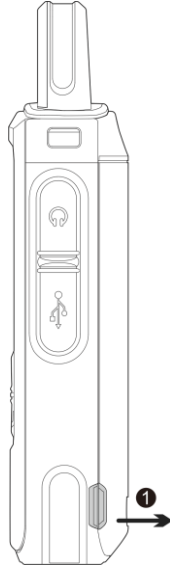

NOTE

- The battery cover is tightly fastened to ensure optimum waterproof performance. Therefore, you need to remove the battery cover with a proper tool.
 - Do not remove the battery cover by force.
-

2. Open the SIM card slot cover.
3. Install the SIM card.
4. Put the card slot cover back in place.

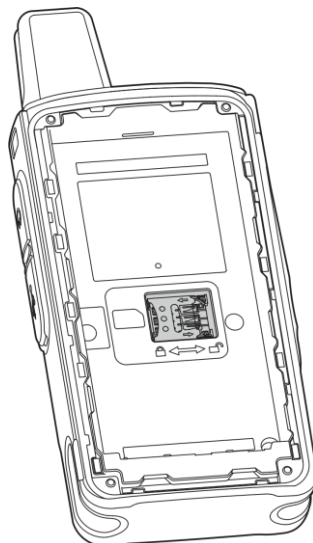


2.2 Attaching the Battery


CAUTION

- Use the approved battery to avoid the risk of explosion.
- Dispose of the used battery according to "Precautions for Disposal" in the *Safety Information Booklet*.

Attach the battery as shown below, and then attach the battery cover back.

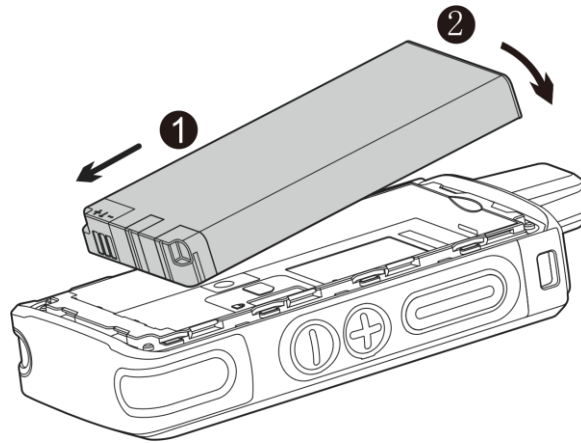


2.3 Attaching the Belt Clip

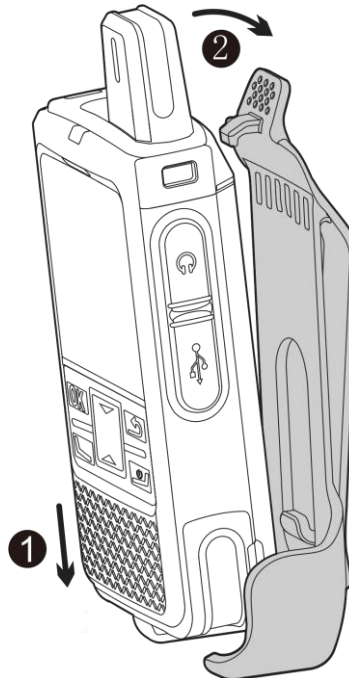

2.4 Attaching the Audio Accessory

Open the audio jack cover, and then insert the audio accessory into the jack.

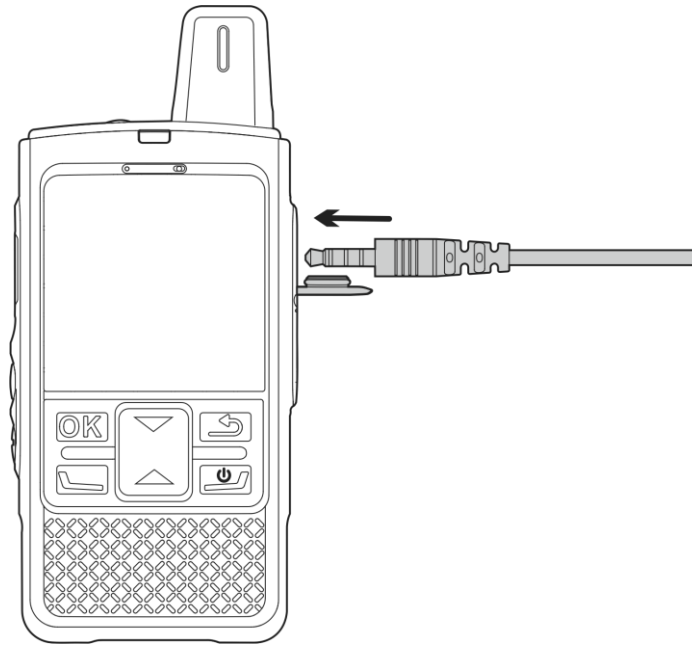

NOTE

To ensure optimum waterproof and dustproof performance, close the audio jack cover after disconnecting the audio accessory.

2.5 Charging the Battery

CAUTION

- Use the approved charger to charge the battery.
 - Read the *Safety Information Booklet* before charging.
 - The remaining lithium-ion battery power is limited to 30% pursuant to the new lithium battery shipment regulation approved by the International Air Transport Association (IATA).
-

Before initial use, charge the battery.

To charge the battery, connect the product to a power adapter, power bank, or computer with the USB cable.


To determine the charging status, check the battery icon shown on the LCD display.


NOTE

To ensure optimum waterproof and dustproof performance, close the USB Type-C port cover after charging the product.

3. Basic Operations

3.1 Turning on/off the Product

To turn on the product, long press  for two seconds.

To turn off the product, long press  for two seconds, and then select **Power off**.

3.2 Adjusting the Volume



To increase the volume, press the **Volume +** key.

To decrease the volume, press the **Volume –** key.

3.3 Locking/Unlocking the Screen

1. To lock the screen, go to **Settings > Screen locked** to enable the feature.

If the product is not operated for a specific duration, the screen will be automatically locked.

2. To unlock the screen, press  and .

3.4 Connecting to the Network

To connect to the cellular network, install the Nano SIM card and activate the cellular data service.

3.5 Checking the Device Information


To check the information such as model, serial number, and version, go to **Settings > About phone**.

4. PoC Services

You can use Push-to-Talk over Cellular (PoC) services such as one-to-one or one-to-many voice call over the public network.

- To initiate a call, do as follows.
 - a. Select a contact.
 - b. Press and hold the **PTT** key, and then speak.
 - c. Release the **PTT** key.
- You can receive a call without any operation.

5. Specifications

Specifications	
Model	PNC360S
Frequency Range	<ul style="list-style-type: none"> ● FDD-LTE: B1/B3/B7/B8/B20/B28 ● TDD-LTE: B38/B40 ● WCDMA: B1/B3/B8 ● GSM: 900/1800 ● BT: BT4.2 ● WIFI: 2.4GHz, 802.11b/g/n20/n40 ● GPS: GPS/Galileo/GLONASS/BeiDou
Tx Power	<ul style="list-style-type: none"> ● GSM900: 32.5dBm ● DCS1800: 29.5dBm ● WCDMA B1/B3/B8: 24dBm ● FDD-LTE (B1/B3/B7/B8/B20/B28): 24dBm ● TDD-LTE (B38/B40): 24dBm ● BT: 3dBm ● WIFI: 17dBm
Operational Temperature	-20 ℃ to +60 ℃
Battery Charging Temperature	10 ℃ to +45 ℃
Software Version	V1.0.01.000.02
Hardware Version	V1.00
Accessories	Adaptor, Belt Clip, Battery
Trademark	
Adapter Model	S010WV0500200
Adapter Input	100-240V~50/60Hz 0.4A
Adapter Output	5.0V/2.0A
Battery Caution	CAUTION Risk of explosion if the battery is replaced by an incorrect type

Specifications	
	<p>disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;</p> <p>leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;</p> <p>a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas</p>



Hytera US Inc.

8 Whatney,
Irvine, CA 92618
(949) 326-5742

1363 Shotgun Road,
Sunrise, FL 33326
(954) 846-1011

www.hytera.us info@hytera.us

Hytera Canada

100 Leek Crescent, Unit 11
Richmond Hill, ON L4B 3E6
(905) 305-7545

www.hytera.ca info@hytera.ca

(C) 2022 Hytera Communications Ltd. All rights reserved.