


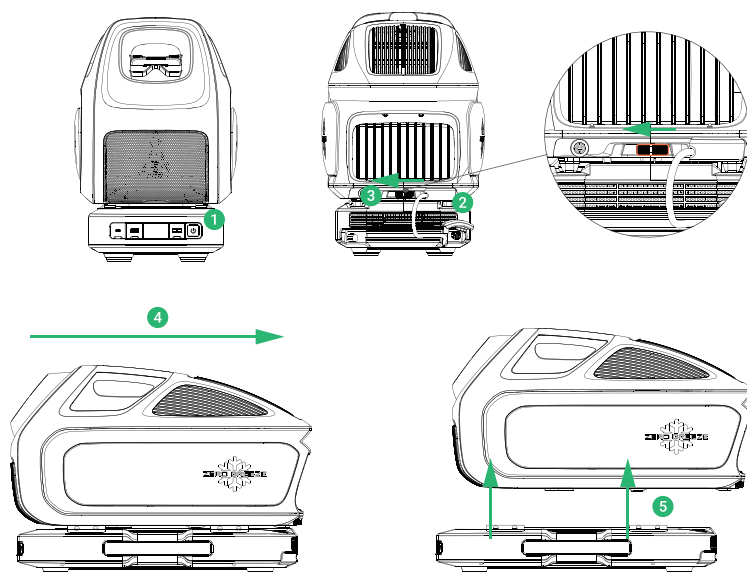


Disconnecting Instructions:

- ❶ Turn off the Mark 3 and battery.
- ❷ Disconnect the power cord from the Mark 3.
- ❸ Press the buckle on the back of the Mark 3.
- ❹ While pressing the buckle, pull the Mark 3 back.
- ❺ Remove the Mark 3 from the battery.

Accessory Connection


Front Inlet and Front Outlet Installation

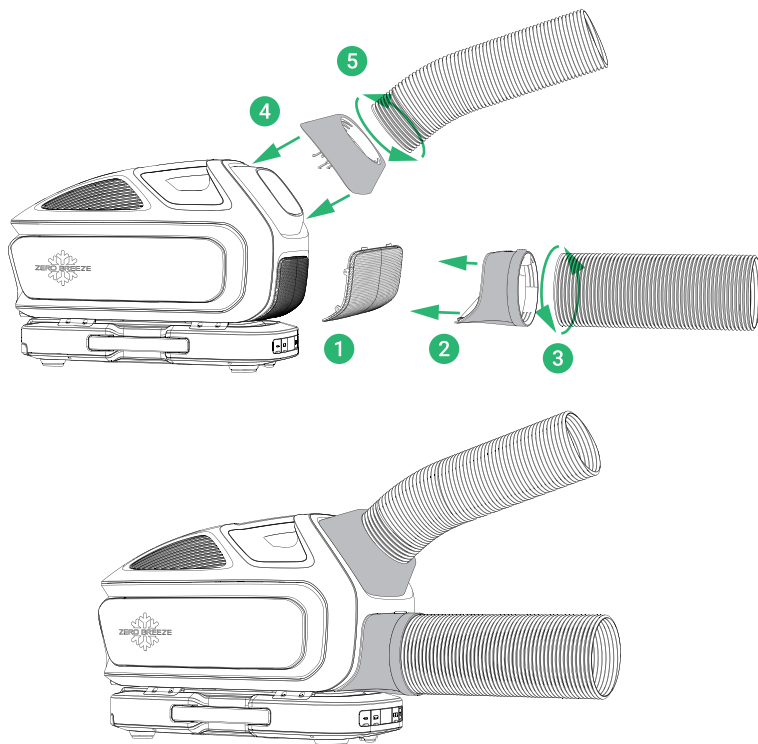

This configuration allows you to place the Mark 3 directly outside the area you are trying to cool and aim both ducts into the space to conserve room.

- 1 Remove the mesh filter.
- 2 Attach the front inlet adapter to the intake vent of the Mark 3.
- 3 Screw the front inlet duct to the adapter.
- 4 Attach the front outlet adapter by inserting it into the front blades of the Mark 3.
- 5 Screw the front outlet duct to the adapter.

Rear Inlet and Rear Outlet Installation

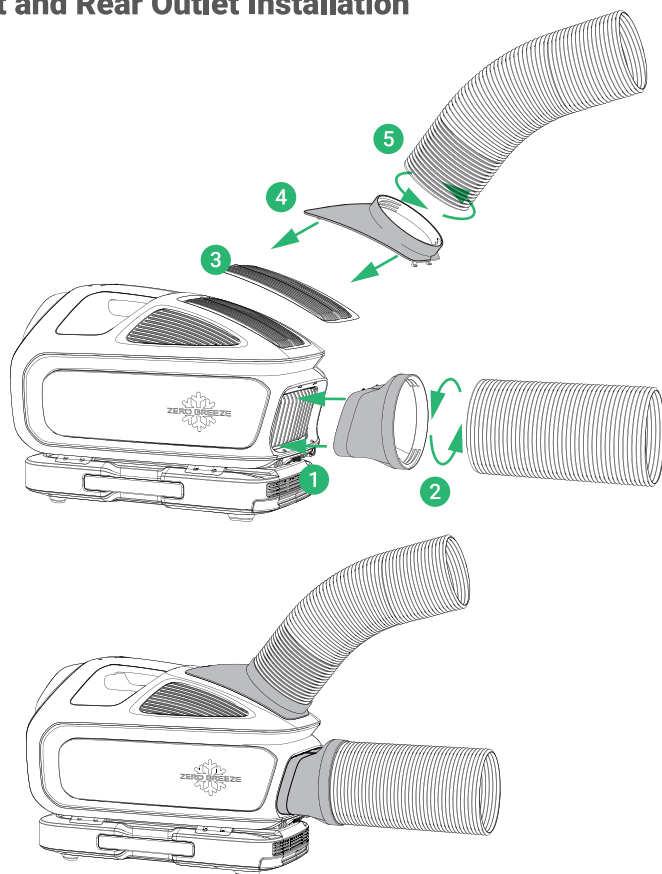


- ➊ Attach the rear outlet adapter to the rear outlet vent of the Mark 3.
- ➋ Screw in the rear outlet duct into the adapter.
- ➌ Remove the vent cover.
- ➍ Insert the rear inlet adapter into the rear inlet of the Mark 3.
- ➎ Screw in the rear inlet duct into the adapter.

Note:

- When using the Mark 3 in a large space or outdoor open space, the Mark 3 functions as a spot cooler.
- When using it in a confined space and wanting to cool down the area, there are two ways to place the A/C and ducts:
 1. Place the A/C inside while venting the rear inlet and outlet ducts out of the space.
 2. Place the A/C outside while directing the front inlet and outlet ducts into the space.
- Front inlet and rear inlet use the same duct.
- Be sure to store both accessories safely. Reattach them when the front ducts are no longer needed.

Drainage Pipe Operation and Installation

Connect the drainage pipe to the drainage outlet to expel condensate from the Mark 3.

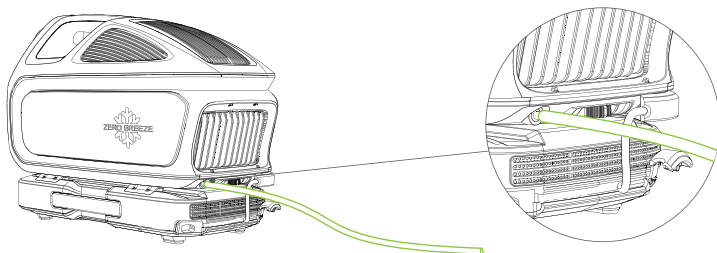

Note:

- The outlet of the drainage pipe can be positioned up to 1 meter above the unit.
- Keep distance from the power supply.
- Ensure the hose is fastened properly and facing downwards to allow the water to flow smoothly.

Usage Precautions

- The Mark 3 should be kept leveled at all times during use.
- Do not tilt the unit forward, backward or sideways when it is in use or being carried, otherwise, water may leak from the front and sides.
- Do not move the Mark 3 immediately after using. The Mark 3 will auto-drain the water for seconds after turning off.
- Even though, new water may generated after turning off for several minutes. Please move it carefully.

Note: If there is leakage due to improper placement, do not be nervous. Simply wipe it up or allow it to cool naturally. It will not affect the performance of the machine.

