


LED Digital Clock Instruction

Application: SN08


Main Functions

- Two versions: ① plug in version (always on when plugged in, screen will be off when the power is off, the AAA battery will remember the time) ② lithium version (screen will be off automatically in 10 seconds, voice will wake up the display)
- Multi information display: time, date, week and temperature are displayed on the same screen
- Brightness adjustable: ① three gear automatic sensitivity ② three gear adjustment brightness manually ③ turn off the display
- Touch function: ① adjust brightness ② start sleepiness ③ turn off alarm clock ④ turn off display
- Two groups of alarm clocks: ① each group of alarm clocks can be set separately for single off, double off and daily alarm ② snooze function
- Three levels volume adjustable

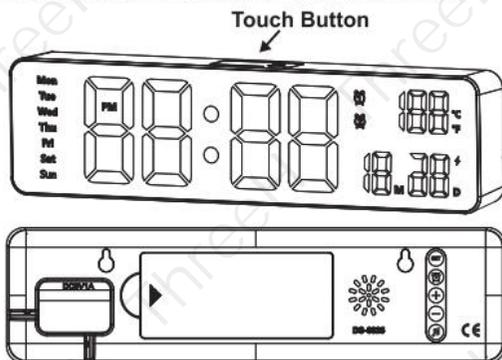

Comprehensive Settings


1. General setting:

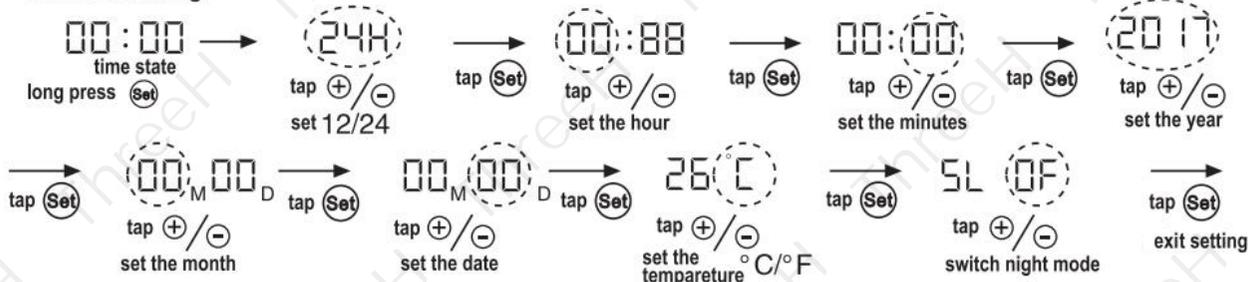

2. Night mode: 22:00 -- 06:00 Brightness enters low brightness mode automatically.

Alarm Settings

- Switch alarm clock: short press “🕒” to display “🕒 icon and alarm time” → press again “🕒 icon and alarm time” then press “Set” to enter the alarm setting of the corresponding group.

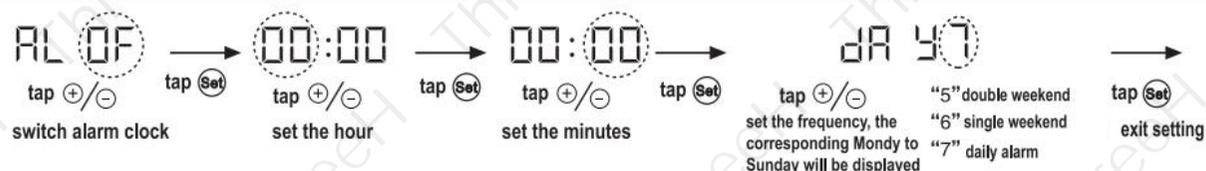

- Turn off the alarm: when the alarm clock rings, long press any button to turn off alarm, enter the next alarm state. Short press any button to start snooze.

Other Settings

- Brightness adjustment: in time state, touch the touch button for 3 seconds to switch manual / automatic brightness adjustment.
 - Automatic mode “L - AU”, short touch the touch button to turn on / off display, voice wake up.
 - Manual mode: in time state, short touch the touch button, the screen is set in high, medium, low and turn off display, such recycle.
- Lithium battery version: when the battery power is low, the low power icon “🔋” flashes, when charging, it is always on, when full, the low power icon “🔋” goes out.
- Volume adjustment: in time state, press “🔊” to cycle the volume of large, medium and small.