



PRODUCT FEATURES

- Ultra bright 5300 lumen 50W 6500K COB LED
- Hybrid - rechargeable and mains powered
- Takes up to 20V 6.0Ah batteries from Milwaukee, De Walt, Makita & Metabo - 4 adaptors included
- Super tough heavy duty nylon construction
- Easy carry rubber grip handle
- 180° Rotating stand/base with holes for tripod/magnet
- Secure battery compartment cover (note: larger 6Ah batteries may need to be used without cover)
- Automatic switch-over from mains to battery in the event of a power failure (if a battery is installed) for added safety
- 2A USB PowerBank - works with any battery installed
- 4 x Battery level and charging indicators
- Comes with 16.4ft heavy duty 24V 2.7A H05RN-F power lead/charger (includes UK, EU, US & AU adaptors)
- Unilite 14.8V 5.2Ah battery available to purchase separately (NOTE: Only the Unilite battery can be charged via the lamp)

BATTERY - Not included, bare tool


WEIGHT - 44oz

DIMENSIONS - W 9.3 x H 10.1 x D 7.1in

OPERATING INSTRUCTIONS



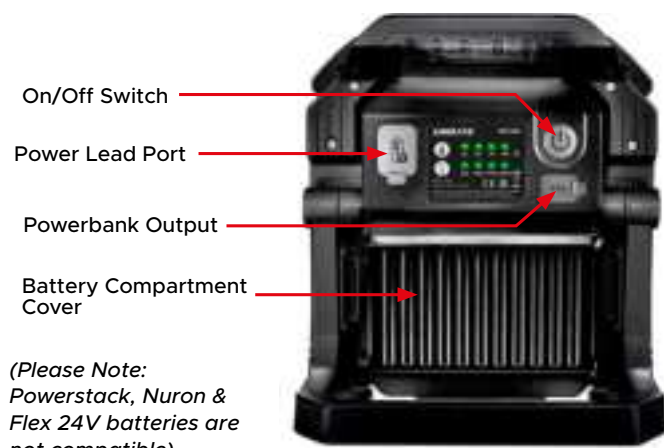

Press the On/Off circle switch on the back of the unit, keep pressing to get the desired light output from the 4 dim settings as shown by the bottom row of green lights.

Memory Switch - If left ON in any MODE for 5+ seconds, next press will turn OFF. Next press ON will return to the last MODE used.



ANSI FL1 Standard



HIGH		5300 Lumen	311ft 2.5H
MEDIUM		2750 Lumen	173ft 4H
LOW		1350 Lumen	124ft 8H
ECO		650 Lumen	72ft 16H

NOTE: these runtimes are based on using the Unilite 14.8V 5.2Ah battery. Runtimes with other batteries will vary.

BATTERY INSTALLATION

VERY IMPORTANT:- When changing a battery, NEVER lay the lamp face down on the lens, instead rotate the light over 180-degrees on its stand so it is facing upside down, and change the battery from that angle.

WARNING PLACING LAMP FACE DOWN IF THE LENS IS HOT WILL CAUSE DAMAGE AND CAN CAUSE FIRE!

Always ensure you use the correct adaptor for the brand of power tool battery you are using. Never force the wrong adaptor onto another brand of battery. This will cause damage and voids any warranties.

The battery compartment cover provides IP65 dust & waterproofing, however with some larger 6Ah batteries, the cover may not fit, so please take note the waterproofing level will not be as high.

POWER LEAD

The 24V 2.7A power lead can power the MTB-5300 as a mains lamp without any battery installed. The 25% green battery level light will illuminate as a 'default' but can be ignored.

This power lead will also provide power to the powerbank port to enable other device charging whilst using the lamp, again without a battery needing to be installed.

The power lead can also act as a charger - HOWEVER this is only possible for the Unilite 14.8V 5.2Ah battery. This power lead will not charge any other brand of battery. Other battery brands will need to be charged in the usual way for that brand.

ADVICE & IMPORTANT INFORMATION!

- LEDs will become hot when switched on; do not touch and never place face down on any surface - risk of fire! Even once the lamp has been switched off, DO NOT place face down as the LED/Lens will stay hot/warm for a while.
- Do not look directly at LED.
- Do not operate in direct sunlight or extreme temperature conditions (below 14°F or above 104°F).
- Do not use the device if there is any visible damage.
- Take care when using the power lead, always check for any damage first. Only use the power lead supplied with the lamp or damage may occur due to differing voltages. Never remove the power lead from the mains power socket with wet hands, and do not attempt to remove by pulling the cord, always grasp the plug unit.
- Children under 12 years of age should only use the product under adult supervision.
- Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.
- Take care not to let the lens come into contact with hard/sharp objects, damage/scratches to the lenses will affect light output.
- This product is water resistant to IPX5 - DO NOT SUBMERGE. If the product has been subjected to excessive moisture/water the warranty may be void.
- This product has a 1 year standard warranty (or extended to 2 years once registered online at WWW.UNILITE.CO.UK/WARRANTY) against manufacturing faults and defects, commencing on the date you received your item. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover battery leaks or the use of incorrect batteries, power leads and cables that can cause damage.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please recycle packaging responsibly.
- Keep these instructions for future reference or for subsequent possessors.

GENERAL BATTERY ADVICE

- New rechargeable batteries will reach full performance after a few complete charging and discharging cycles.
- To keep the rechargeable batteries in optimum condition, they should be recharged every 3-6 months, especially if not being used for a long period of time.
- Always fully charge batteries before storage.
- Always protect lithium batteries from heat, intense sunlight, fire, water and moisture - danger of explosion!
- If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if lithium battery fluid comes into contact with the eyes.