


T-6955 & T-6956 (3/16" ORBIT) T-6955B & T-6956B (3/32" ORBIT) 5" OR 6" PALM GRIP SANDER



OILING INSTRUCTIONS:
OIL AFTER EACH
USE WITH A FEW
DROPS OF AIRTOOL
OIL THROUGH THE
AIR INLET. RUN
FOR 1 SECOND TO
COAT ALL INTERNAL
PARTS.

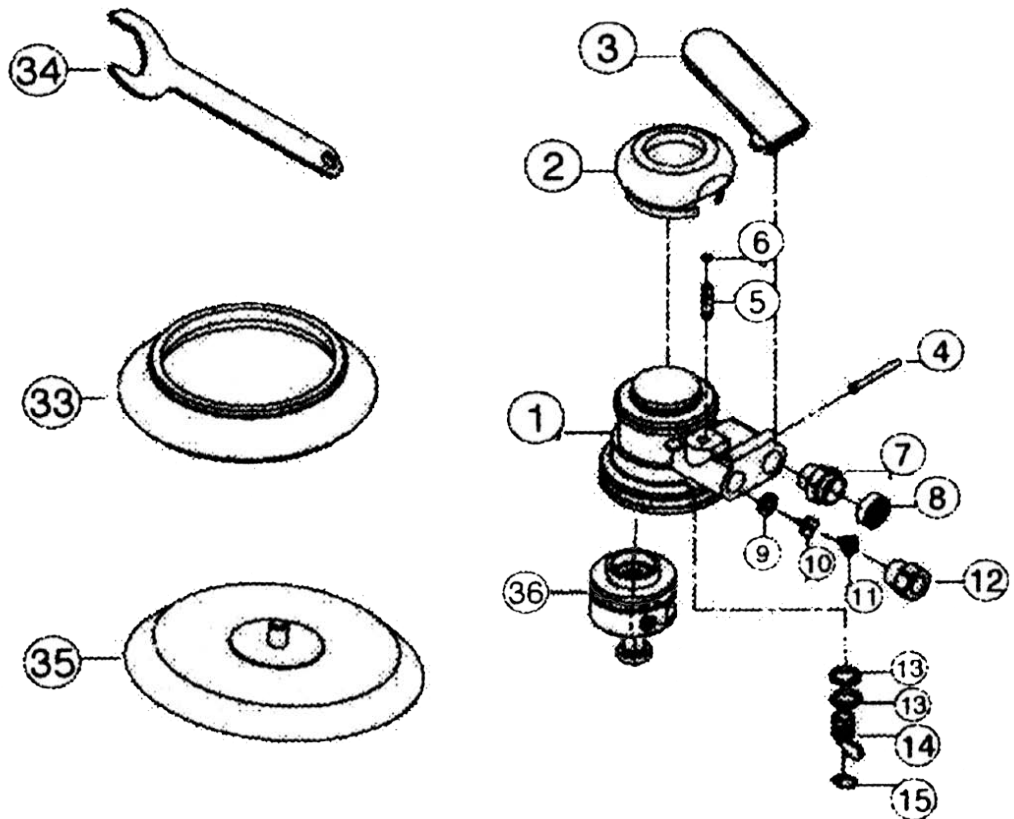

USE 90 PSI MAXIMUM

REF #	PART #	PART #	QTY	REF #	PART #	PART #	QTY
1	695501	HOUSING	1	33	695533	SHROUD GUARD	1
2	695502	HOUSING GRIP	1	34	695534	WRENCH (24MM)	1
3	695503	LEVER	1	35	T-6415	PAD 6"	1
4	695504	SPRING PIN	1		T-6416	PAD 5"	1
5	695505	VALVE STEM	1	36	6955MA	MOTOR ASSEMBLY 5" - 3/16"	1
6	695506	O-RING	1		6956MA	MOTOR ASSEMBLY 6" - 3/16"	1
7	695507	EXHAUST ADAPTER	1		6955BMA	MOTOR ASSEMBLY 5" - 3/32"	1
8	695508	MUFFLER ELEMENT	1		6956BMA	MOTOR ASSEMBLY 6" - 3/32"	1
9	695509	VALVE SEAT	1				
10	695510	VALVE TIP	1				
11	695511	SPRING	1				
12	695512	AIR INLET	1				
13	695513	O-RING	2				
14	695514	REGULATOR	1				
15	695515	SNAP RING	1				

505 N. Railroad Ave. 33435
P.O. Box 1117 33425
Boynton Beach, FL

FOR WARRANTY INFORMATION &
WARRANTY REGISTRATION VISIT
www.taylorpneumatic.com

Ph. (561)732-1111
Fax. (561)731-4412
Toll Free (800) 805-8665