



Green Lion



4 In 1 Wireless Remote

SKU: GN4INWRMTBK

Table of Contents

Schematic View	2
Indicator Guide	3
Pairing Instructions	3
Instructions for Use	4
A. Control and Programming	4
B. Voice Assistant	5
C. CPI Adjustment	5
D. Keyboard Function	5
Features	5
Factory Reset	6
Specifications	6
Notes	6
Package Contents	7
Disposal	7
Warranty	8
Contact Us	8

Schematic View

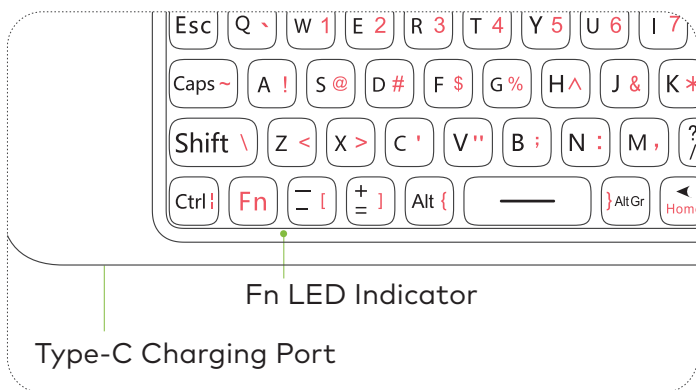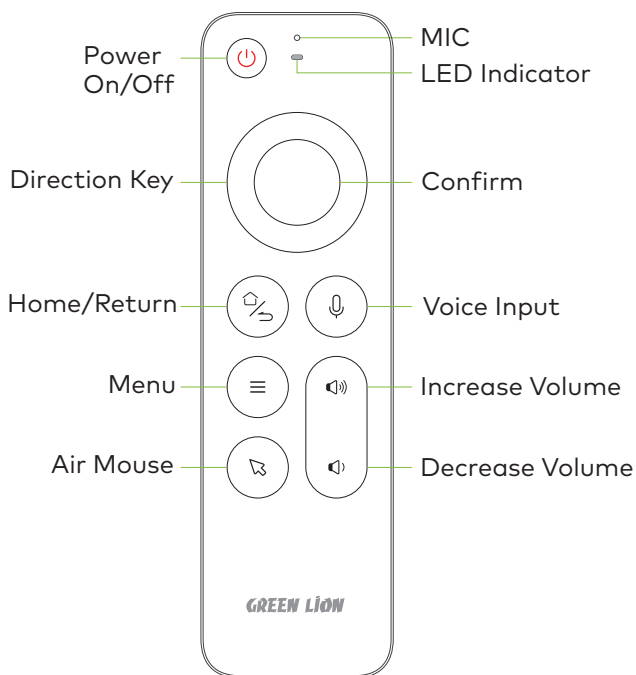



Home and Back Function

Short press: Back

Long press: Home page



To Switch Punctuation

Fn light on: Switch to red character input

Fn light off: Switch to default state



This function allows for quick input of symbols such as < www. com > for easy web browsing or text entry.



Indicator Guide

Receiver Offline	Flashes Slowly
Charging	Solid Light
Fully Charged	Light Off
Low Battery	Flashes for 3 Seconds



Pairing Instructions

Normally, all remotes are pre-paired with the USB receiver, so the USB receiver can be used immediately after plugging it in.

If the connection between the USB receiver and the product is lost due to incorrect operation during use, please follow these steps to reconnect:

1. After inserting the USB receiver into the device, place the product and the USB receiver within 2 inches of each other.
2. Press and hold the <vol +> and <vol - > buttons for 3 seconds.
3. The indicator light will flash 3 times quickly, then stay on, indicating

that the product has entered pairing mode.

4. The indicator light will then flash 3 more times quickly, and then turn off automatically. This indicates that the pairing was successful.

5. If the indicator light does not flash within 30 seconds and turns off automatically, it indicates that the pairing has failed.

Instructions for Use

A. Control and Programming

1. The device can be controlled via both IR (Infrared) and RF (Radio Frequency) signals.

2. Without the USB receiver plugged in, the front buttons (except the mouse and voice buttons) are controlled by IR.

3. Once the USB receiver is plugged in, the product is controlled by RF by default. However, if the USB receiver is plugged in after completing IR connection programming, the front buttons will be controlled by IR first.

Note: The power button is always controlled by IR.

4. IR Connection Steps:

4.1 Align the IR light of your remote with the IR light of the product horizontally, ensuring the distance is within 0.5 inches.

4.2 Press and hold the button on your remote control that you want to program onto the product. The light on the product will continue flashing rapidly.

4.3 When the light turns to a slow flash, press the corresponding button on your remote control.



4.4 The product will flash 3 times quickly, indicating that the IR programming for that button was successful.

4.5 Repeat the above steps for each button you wish to program.

Note: Please complete the IR programming process before plugging in the USB receiver.

B. Voice Assistant

Long press the voice button, then speak your command.

Note: Only available after downloading Google Assistant and Google Voice Search.  

C. CPI Adjustment

The built-in 6-axis gyroscope in the product is capable of sensing changes in 360° direction and speed. Simply wave the mouse through the air to precisely control the device. If the cursor speed is either too fast or too slow, please adjust it using the following steps:

1. The CPI (Counts Per Inch) has 4 levels. The default setting is the second level. The higher the level, the faster the cursor speed.
2. Press and hold the <OK> button, then use the <Vol +> or <Vol - > buttons to adjust the cursor speed.
3. The indicator light will flash 3 times quickly, indicating that the cursor speed has been successfully adjusted.

D. Keyboard Function

The device uses a QWERTY keyboard layout, which is consistent with the operating habits of most users. To switch to the number and symbol input mode, press the <Fn> key.

Features

1. To prevent accidental button presses, only the functions on the face-up side of the device are operational. The functions on the face-down side are disabled to avoid unintentional input.
2. If there is no operation on the remote control for 15 seconds, the air mouse will automatically enter sleep mode, and the indicator light will turn off. Once in sleep mode, pressing any key will wake the remote control allowing it to return to its normal working state.

Factory Reset

Press the <OK> and <Left> buttons simultaneously until the indicator light flashes, then release both buttons.

Specifications

Material	ABS
Battery	250mAh
Working Current	33mA
Connectivity	IR and 2.4GHz RF
Modulation Method	GFSK
Modulation Frequency	2.4835-2.4GHz
Resolution	800-1200 DPI
Control Range	8-12m
Number Of Keys	58 Keys
Charging Port	Type-C
Charging Time	1.5h
Working Time	20 Days
Product Weight	53.6 g
Product Dimensions	9.5×44×152 mm
Compatibility	Android/Windows/Mac OS/Linux

Notes

1. This product is equipped with a built-in lithium battery, and the charging input voltage is 5V.
2. If the remote control has not been used for an extended period or the

battery is low, please ensure it is fully charged before use.

3. Use only the designated USB cable to charge the remote control. Overcharging may shorten the battery's lifespan.

4. Avoid exposing the product to extreme temperatures (hot or cold), as this can reduce the battery life.

5. Keep the product away from liquids such as water, as moisture can damage the device.

Package Contents

1. Wireless Remote

2. USB Receiver

3. Charging Cable

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at [**https://www.greenlion.net/warranty**](https://www.greenlion.net/warranty) and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
[**https://www.greenlion.net/warranty**](https://www.greenlion.net/warranty)

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: [**https://www.greenlion.net/**](https://www.greenlion.net/)

Sales: [**sales@greenlion.net**](mailto:sales@greenlion.net)

Service Support: [**Support@greenlion.net**](mailto:Support@greenlion.net)

Telegram: [**@greenlion_global**](https://t.me/greenlion_global)

Instagram: [**@greenlion_global**](https://www.instagram.com/greenlion_global)