

# Z-Stick Gen5 V1.01 firmware update.

Modified on: Mon, 31 Aug, 2020 at 3:57 PM

You can update your Z-Stick Gen5, if you are not sure what firmware version your Z-Stick Gen5 is, you can update Z-Stick Gen5 without resetting your Z-Wave network.

**Note** - Much older Z-Stick Gen5 units will not be possible to update.

## Requirements

- Windows 7 or later

## Changelogs


- Z-Wave SDK version updated to V6.51.10

## Download Firmware V1.01

- **EU Frequency** (<https://aeotec.freshdesk.com/helpdesk/attachments/6071670582>), (ZW090-C)
- **AU Frequency** (<https://aeotec.freshdesk.com/helpdesk/attachments/6072669698>), (ZW090-B)
- **US Frequency** (<https://aeotec.freshdesk.com/helpdesk/attachments/6071670590>), (ZW090-A)

## Install Driver (Required)

1. Download Driver through this link: <https://aeotec.freshdesk.com/helpdesk/attachments/6071670591>  
(<https://aeotec.freshdesk.com/helpdesk/attachments/6071670591>).
2. Unzip ZW050x\_USB\_Programming\_Driver.zip into any folder (recommended software to unzip, WinZip or WinRar).
3. Open up the folder and find the .inf file

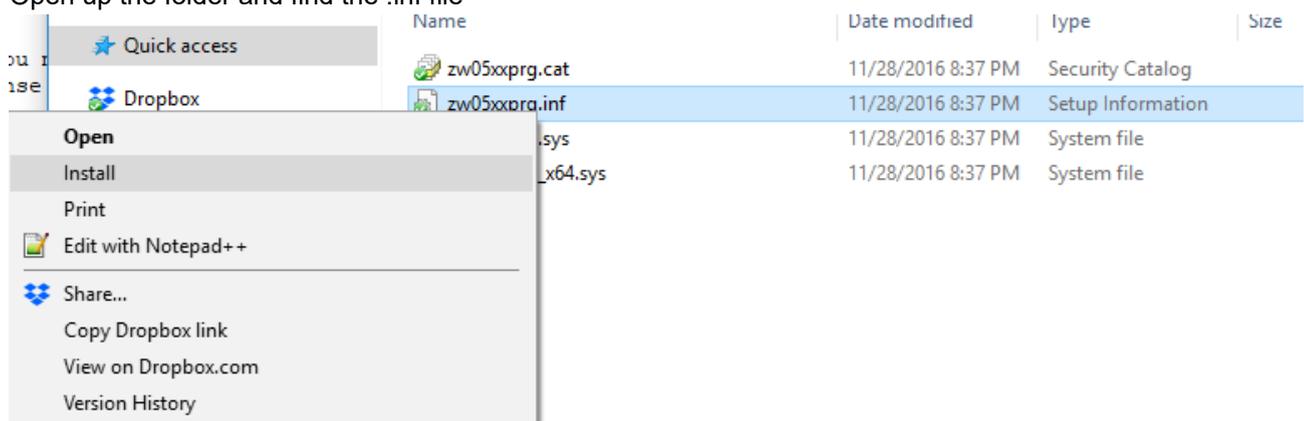


4. Right click on "zw05xxprg.inf"
5. Select "Install"

## Update Z-Stick Gen5

1. Unzip "Z\_Stick\_G5\_V1\_01\_DFU.zip" into any folder (EU or US version depending on your Z-Wave Frequency).
2. Open up the folder, and open "ZStick\_G5\_Update tool.exe"
3. Connect your Z-Stick Gen5 to your PC, ensure that it is not connected to any software interface

4. Connect your Z-Stick Gen5 to update software through "Settings -> COMx"

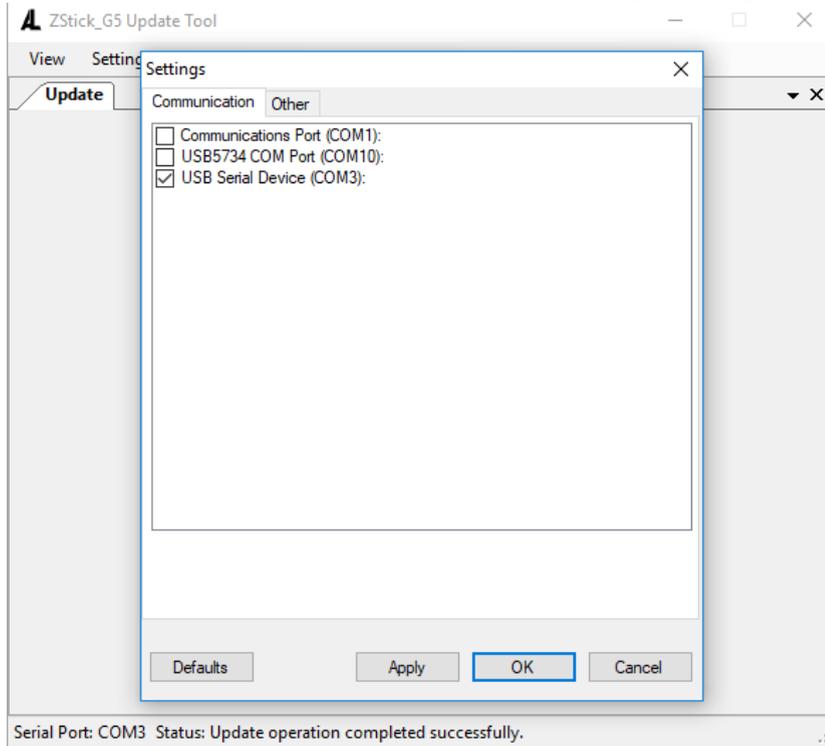

5. Click on "OK"

6. If successful, at the bottom of your software, it will state:

**Serial Port: COM3 Status: Update operation completed successfully.** COM3 in the above image will depend on what COM port your Z-Stick Gen5 is connected through (ie. COM5, COM10, etc).

7. Click on "Update" and the update process will finish in roughly 3 minutes.