

IP DUAL SENSOR THERMAL PTZ CAMERA



ENC-HHP7Z-300R-34

FEATURES

384x288 VOx Uncooled Focal Plane Detector
Sensitivity $\leq 40\text{mK}$
25 mm Motorized Focus Lens
Areas / Spot / Line Temperature Measurement Rule Support
17 Color Patterns Support
IP67, PoE++



SPECIFICATION

MODEL	Model No.	ENC-HHP7Z-300R-34
	Type	IP DUAL SENSOR THERMAL PTZ CAMERA
THERMAL CAMERA	Detector Type	Uncooled VOx Focal Plane Arrays
	Effective Pixels	384x288 and Image can be scaled up to 1280x720
	Pixel Size	12um
	Thermal Sensitivity (NETD)	$\leq 40\text{ mK}$
	Spectral Range	8 ~ 14um
	Image Settings	Brightness, Sharpness, Contrast, 2D/3D DNR, Mirror / Flip, FFC
	Color Palettes	White & Black Hot, Ironbow, Rainbow etc. up to 17 modes
THERMAL LENS	Iris	Auto Fixed IRIS
	Lens	Fixed
	Focus Control	Motorized Focus
	Focal Length	25 mm
	F No	F1.0
	Angle of View	10.5 ° (H), 7.9 ° (V)
	Detection	25 mm: Human(1.8mx0.5m) - 1042 m, Vehicle(4.0mx1.5m) - 3194 m
	Recognition	25 mm: Human(1.8mx0.5m) - 260 m, Vehicle(4.0mx1.5m) - 799 m
	Identification	25 mm: Human(1.8mx0.5m) - 130 m, Vehicle(4.0mx1.5m) - 399 m
	Fire Detection	25 mm: Fire (0.2mx0.2m) - 208 m, Fire (1.0mx1.0m) - 1042 m

★Product specification and availability are subject to change without notice.

IP DUAL SENSOR THERMAL PTZ CAMERA



ENC-HHP7Z-300R-34

MODEL	Model No.	ENC-HHP7Z-300R-34
	Type	IP DUAL SENSOR THERMAL PTZ CAMERA
VISIBLE CAMERA	Image Sensor	1/1.8" Sony CMOS
	Max Resolution	2688 x 1520
	Focal Length	6.27 ~ 251 mm
	Focus Control	Auto / Semi Auto / Manual
	Angle of View (H)	60.7° ~ 2.3°
	Angle of View (V)	36.8° ~ 1.3°
	Angle of View (D)	70.9° ~ 2.6°
	Max Aperture	F1.5 ~ F4.8
	Optical Zoom	40x
	Digital Zoom	16x
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. illumination	Color: 0.001 lux @ F1.5, B/W: 0.0001 lux, 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55dB
	WDR	120dB
	Smart IR	Up to 300 m
VIDEO	Detection	95.0 ~ 3515.0 m
	Observation	38.0 ~ 1406.0 m
	Recognition	19.0 ~ 703.0 m
	Identification	9.5 ~ 351.5 m
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: Thermal: (1280×720, 704×576, 384×288) @25fps; Visible: (2688×1520, 2560×1440, 2304×1296, 1920×1080, 1280×720) @25/30fps Sub Stream: Thermal: (704×576, 384×288, 352×240) @25fps; Visible: (704×576, 640×480) @25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	EIS	Supported
	Bit Rate Control	CBR, VBR
	Bit Rate	Thermal: 100 Kbps ~ 8 Mbps Visible: 100 Kbps ~ 16 Mbps
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	HLC	Supported
	BLC	Supported
AUDIO	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (Small / Medium / Big), Image overlay
	ROI	Up to 8 regions
	Privacy Masking	Up to 40 regions (each scene up to 8)
SMART	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bitrate	64kbps, 128kbps
	Audio I/O	1/1
	Behaviour Detection	Thermal/Visible: Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Thermal/Visible: Loitering, Region Entry / Exit Detection Thermal: Flame Point Detection, Smoker Detection Visible: Smoke Detection, Flame Detection
	Statistical Analysis	Thermal/Visible: People Counting, Wrong Way Detection, Human and Vehicle Detection, Temperature Detection
	Alarm Management	Motion Detection, Disk Full Alarm, Temperature Alarm, Input / Output Alarm, IVS Alarm
	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
	Auto Tracking	Supported

IP DUAL SENSOR THERMAL PTZ CAMERA



ENC-HHP7Z-300R-34


MODEL	Model No.	ENC-HHP7Z-300R-34
	Type	IP DUAL SENSOR THERMAL PTZ CAMERA
TEMPERATURE	Detection Mode	Spot, Line, Area (Total 20 Rules - 1 Full Screen and 19 others)
	Alarm	Over/Difference Alarm
	Accuracy	±8°C
	Response Time	≤ 30ms
	Measurement range	-20°C ~ 150°C (-4°F ~ 302°F)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTCP, RTSP, PPPoE, NTP, UPnP, SMTP (SSL/TLS), IGMP, 802.1x, QoS, Unicast, Multicast, SNMP, ARP
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), CGI / SDK
	Network	1x RJ45 10M/100M Self Adaptive Ethernet Port
	Serial Interface	1xRS485
	BNC	Supported
	Edge Storage	Micro SD Card Slot, Up to 1TB
	Alarm I/O	7/2
	Heater	Supported
	Fan	Supported
	Wiper	Supported
	Max. User	32
	Client Application	EyeGuard
PAN AND TILT	Pan Range	0° ~ 360° (Endless)
	Pan Speed	Pan Manual Speed: 0.01° ~ 300°/s, Pan Preset Speed: 300°/s
	Tilt Range	-10° ~ +90°
	Tilt Speed	Tilt Manual Speed: 0.01° ~ 240° /s, Tilt Preset Speed: 240°/s
	Preset Accuracy	± 0.2°
	Number of Presets	400
	3D Position	Supported
	Power Off Memory	Supported
	PTZ Mode	6 Track 12 Scan, 12 Patrol (32 Preset per Patrol)
	Speed Setup	Auto/Manual (0-8)
GENERAL	Power Supply	36V DC (Default)/ AC 24V, PoE++(IEEE 802.3bt)
	Max. Power consumption	≤45 W
	Working Temperature	-40 °C ~ 70°C
	Working Humidity	≤95% RH
	Casing	Metal
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS6000V
	Reset Button	Supported
	Dimensions	φ226×363 mm
	Weight	6 Kg

IP DUAL SENSOR THERMAL PTZ CAMERA



ENC-HHP7Z-300R-34

Dimension Unit : mm

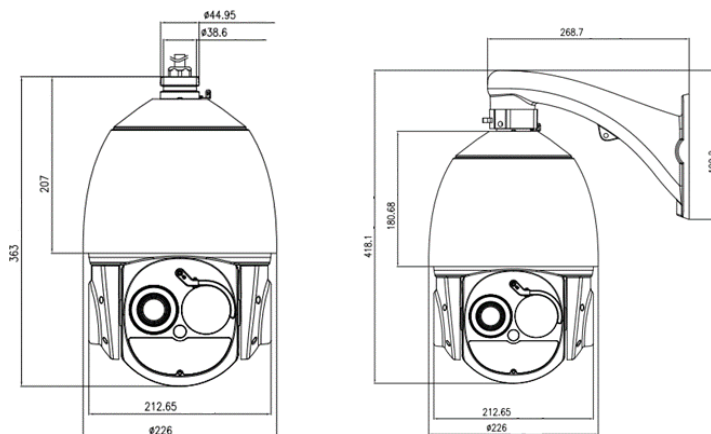

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HHP7Z-300R-34	4MP IP Dual Sensor Temperature Detection Thermal PTZ Camera with Visible Lens of 40X Optical Zoom and Thermal Imaging Camera with 384*288 Thermal Resolution, 25mm Motorized Focus Lens, 300m IR support, PoE++ and SD Card Slot Support	1
ENB-BCPW67	Wall Mount Bracket for Thermal PTZ Camera (Included in Device Package)	1
ENB-BCPJ66	Junction Box for Norden Thermal PTZ Camera	1
ENB-BCPH66	Corner Mount Bracket for Norden Thermal PTZ Camera	1
ENB-BCPP67	Pendant Mount Bracket for Norden Thermal PTZ Camera	1
ENB-BCPV66	Pole Mount Bracket for Norden Thermal PTZ Camera	1
ENB-BCPX67	Wall Mount Bracket with Junction Box for Norden Thermal PTZ Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HHP7Z-300R-34	Carton Box	-	-