

Bullet 2S

ORIGINALITY DESIGN SMART – AND BEAUTIFUL

.....



QUICK GUIDE



What's in the box

Please consult this checklist for all parts.



Bullet 2S




Power adapter




Screws



Pin



I/M

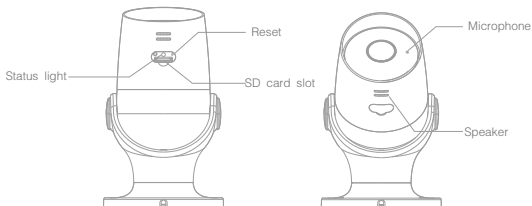


Description

Power	DC12V \pm 10%
Status light	<ul style="list-style-type: none"> • Red light solids on: the camera network is abnormal • Blinking red light: awaiting WiFi connection, or currently connecting (faster blinking) • Blue light solids on: camera running correctly • Blinking blue light: awaiting manual WiFi configuration, or currently connecting (faster blinking)
Microphone	Captures sound for your video
SD card	Supports local SD Card storage (Max 128G)
Speaker	Speaker speak with the app and it will revert too
Reset	<p>Press and hold for 5 seconds with pin to reset the camera (if you have modified settings, they will return to factory defaults)</p> <p>Pressing for 1 second will activate manual WiFi setup mode</p>

- 1 Fix the Camera to the wall with screws.

- 2 Adjust camera angle to a correct view (as shown in the picture).

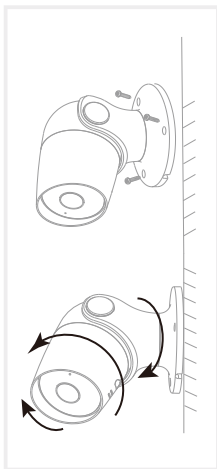

Download

SmartLife or Tuya Smart is available for both iOS and Android OS. Search the name 'SmartLife', 'Tuya Smart' in App Store or Google Play, or scan the QR-Code to download the App.

Support




Set up router

The router supports the 2.4GHz WiFi (doesn't support the 5GHz), and is connected to the WiFi network. Please set the parameters of the router before connecting the WiFi network, and record the SSID and password of your WiFi.




Registration process


Step 1 Open the Smart Life App, click "Sign Up", read the "User Agreement Privacy Policy" and click "Agree".

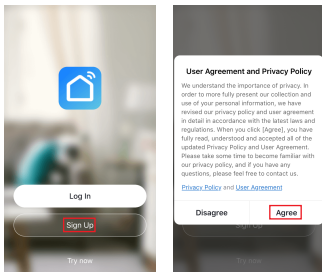


Step 2 Input a legal and valid Mobile number or Email address and click "Get Verification Code". Input the verification code to log in.





- 1 Open the Smart Life App, click "My" >> "Home Management" >> "Create a home", and you can customize the home name and related settings .

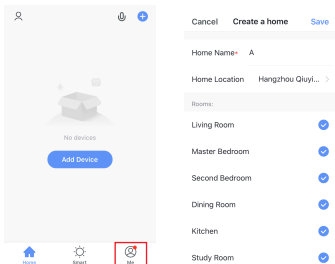

- 2 Click "Add Device" or "+", and then select "Security & Sensor" >> "Smart Camera" to add camera.

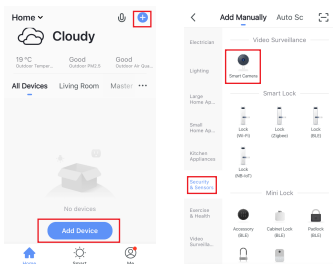


- 3 Power on and reset camera until the status indicator is flashing quickly or a prompt tone is heard, and then click "Next". Then input your WiFi's passwords and click "Next". Click "↔" to change network.





Note:

- 1) Camera only supports 2.4GHz WiFi network.
- 2) The number of bits in the ssid and passwords of the router should not exceed 24 digits.



- 4 In this interface, you should scan the QR code in your phone with the camera, when the camera comes out "dong dong dong". And you can complete the configuration about 30s.



- 5 When connecting, you should make sure your router, mobile, and camera are as close as possible. When camera added successfully, click "Done" you could also DIY the camera's name.



In "Smart Camera" interface,click "",you can set the camera common functions.



Q: The camera cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, if not, it is better to reset the camera and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reseted camera only resets the network configuration of the camera, but cannot change the configuration in the App, remove the camera in your account, need to add again.

Q: How to cut the camera network to other router?

A: First remove and reset the camera in your App account and then configure your camera again by the App.

Q: Why doesn't the camera identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Video flip

Flip your video stream up or down for maximum flexibility.

Motion detection

Built-in motion sensors detect movement, and the camera will send you push notifications and app alerts.

Record

Support 24H continuous recording with high capacity SD storage.

Day & Night

Never miss a moment, even in complete darkness, with powerful night-vision technology.



Daytime



Night