

Model:
UTVS-DEF-OSA



WARRANTY

Should your product require service, please consult with the dealer from which it was purchased or contact a local UTV STEREO dealer directly. Units received without an accompanying return authorization number will not be processed. Please contact your UTV Stereo dealer or contact UTV Stereo directly to obtain a return authorization number. Additionally, you must include a copy of your purchase receipt from an authorized UTV Stereo dealer for consideration of an in-warranty service. Units received without a receipt will be held for 30 days. Allowing us time to contact you and obtain a copy of the receipt. After 30 days, all units will be returned. For more information please visit our website.



**DO NOT SUBMERGE THIS PRODUCT.
THIS WILL VOID YOUR WARRANTY.**



**FAILURE TO FOLLOW INSTALLATION
INSTRUCTIONS COULD VOID
YOUR WARRANTY.**

UTV STEREO and the UTV STEREO logo are registered trademarks.
All other brand names are trademarks or registered trademarks of their respective owners.
These trademark holders are not affiliated with UTV Stereo.
All rights reserved. Designed in USA.

Copyright© 2025 UTV STEREO

Tel. 480-616-2299
Address: 7561 East Baseline Road Mesa, AZ 85209

Designed in USA


utvstereo.com



CAN-AM® DEFENDER OVERHEAD SPEAKER ADAPTERS

DESIGNED FOR
UTV - POWERSPORTS - MARINE

480.616.2299  **UTVSTEREO.COM**

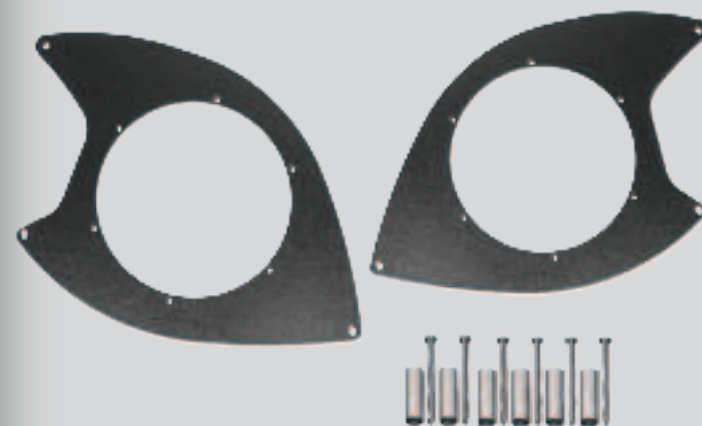

CONTENTS:

- Parts List
- Installation Instructions

OWNERS MANUAL
FOR MODEL: UTVS-DEF-OSA

Designed in USA

utvstereo.com

CAN-AM DEFENDER OVERHEAD SPEAKER ADAPTERS

PART #: UTVS-DEF-OSA

PARTS LIST:

Overhead Speaker Adapters	x2
Mounting Hardware:	
Long Button Head Screws	x6
Spacers	x6

RECOMMENDED PRODUCTS:

SIGNATURE SERIES 6.5" SPEAKERS

PART #: UTVS-654

*SOLD SEPARATELY



RGB LED 6.5" SPEAKER RINGS

PART #: UTVS-65LSR

*SOLD SEPARATELY



Scan to watch
the Installation
Video!



UTVstereo
PERFORMANCE AUDIO




1.
Remove the 8 screws in the plastic roof panel
then remove the panel



2.
Remove the 6 screws in the roof liner




3.
Remove the roof liner
**Do not lose the foam pieces, you can
re-attach if needed*

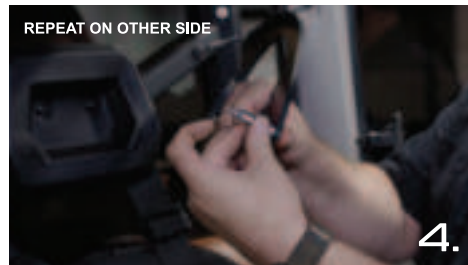

4.
Run the screw through the mount and add
the spacer on back




5.
Attach the mount to the plastic pillars
on the roof

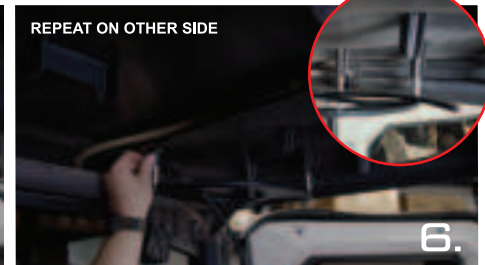

6.
Run your speaker wires along roof and secure
with zip ties
**Keep the speaker wire on top of the mount, so you can
easily grab it once hole is cut*



7.
Re-attach the roof liner and plastic panel

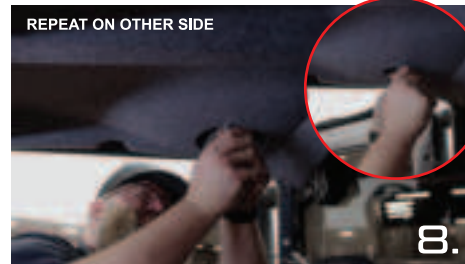


8.
Carefully cut out the hole for the speaker
**Cut a small notch so you can see where to cut
using the mount as a guide*



9.
Pull the speaker wire through the new hole
and strip the sheath to expose the RGB
and power wire



10.
You can place a screw into the mount
to mark the location of the hole

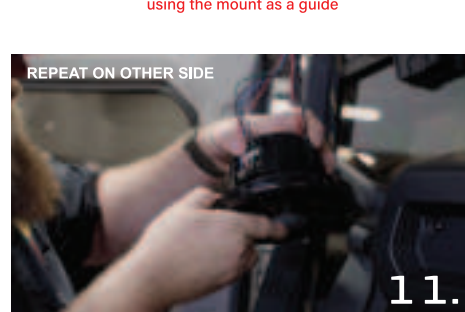

11.
Make all your connections to the speaker
(RGB & Power)



12.
Mount the speaker and secure it with the
included screws

We are here to help! Reach out to us at info@utvstereo.com or call us at 480.616.2299