



Qixiang Electron Science & Technology Co., Ltd

www.anytone.net

AnyTone[®]

AT-5289 II

10 Meter Amateur Radio

User Manual




CONTENTS

1.FUNCTIONS & FEATURES	1
2.STANDARD ACCESSORIES.....	2
3.GETTING ACQUAINTED.....	3
4.MODIFY MENU	5
5.BASIC OPERATION	6
6.MENU	10
7.SPECIFICATIONS.....	12

1. FUNCTIONS & FEATURES

1. LCD display with 7 color, with back light dimming
2. FM, AM modes
3. Frequency Tuning Steps: 1KHz, 10KHz, 100KHz, 1MHz
4. Flexible menu functions
5. RX and TX NRC Noise Reduction
6. SQ, ASQ Function
7. RF GAIN Adjustment
8. VFO / BAND / Memory Channel Modes
9. Repeater Shift / Offset Frequency Function
10. CTCSS/DCS with RX/TX Split functions
11. SCAN Function
12. NB/ANL Function
13. DUAL-WATCH Function
14. SWR, S/RF meter Function
15. TOT function
16. HI-CUT Function
17. SWR Protection
18. Power Supply Voltage Protection
19. Key-Lock Function
20. BEEP Prompt
21. VOX Function
22. ECHO Function
23. RB Function
24. User Defined (PF) key on microphone
25. Recording function
26. Clock function
27. Alarm function
28. Compression and expansion function


2. STANDARD ACCESSORIES




Radio



Microphone




Install bracket



Screws



Pads



Adjusting screws



Microphone
Hanger




Adhesive Case
Protectors



Fuse (15A 250V)

3. GETTING ACQUAINTED

4.1 Front Panel.....

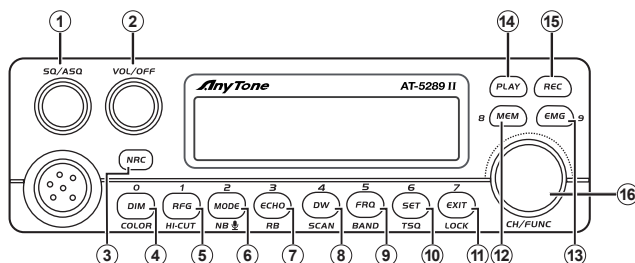

No.	Key	Functions
1	SQ/ASQ	Squelch Control
2	VOL/OFF	Power On/Off; Volume Control
3	NRC	Activate / deactivate the NRC function
4	DIM	Backlight brightness /color control
5	RFG	RF Gain /HI-CUT Control
6	MODE	FM, AM Switch Mode;NB,VOX function
7	ECHO	Activate / deactivate the ECHO/RB function
8	DW	turn on Dual watch /SCAN function
9	FRQ	Switch Band: A-I / VFO mode
10	SET	Function menu settings/ CTCSS/DCS function
11	EXIT	Clock/Date Display/Back Button; Keypad lock
12	MEM	Use, Store memory channels
13	EMG	Emergency Channel
14	PLAY	recording playback menu
15	REC	recording menu
16	CH/FUNC	Channel Switch; FUNC key