



SMART Wi-Fi PLUG

[Instruction Manual]

Thank you for your purchase.

Please contact us if you have any problem.


Email: dewenwils@hotmail.com

Please attach your User Name or Order ID so that
we can assist you better.

Warning: To reduce the risk of fire, electric shock or personal injury, always follow the instructions strictly.

1. Do not connect any device which may exceed the maximum ratings of the smart plug.
2. Do not connect this smart plug to appliances that contain heating elements (cooking appliances, heaters, irons, etc.). Failure of the smart plug to shut off such devices may lead to overheating and potential fire.
3. Avoid exposure to high-temperature sources, direct sunlight and moisture.
4. Children are not allowed to use the smart plug without supervision.
5. Do not disassemble or repair the product; only authorized service personnel are allowed.
6. Do not immerse in water.
7. Always unplug and store indoors when not in use.
8. The Chome app is only compatible with Android 4.0/iOS 7.0 and above systems.

◆ Product Layout

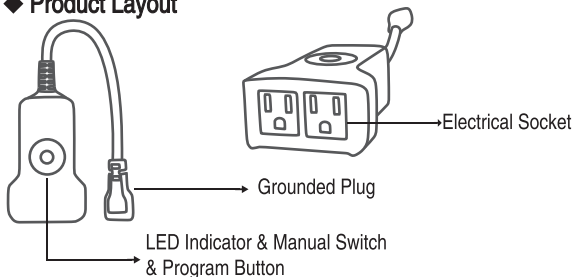

● Rapid Flashing Red

The smart plug has been reset and disconnected from the app.

- **Slow Flashing Red**

The smart plug has been reset and need to enter AP mode.

- **Red Steady Light**

The smart plug is disconnected or has other abnormalities.

- **Blue Steady Light**

The smart plug is in remote control state, and the power is on.

- **LED Off**

The smart plug is in remote control state, and the power is off.

◆ Specifications

Input Voltage	125V 50/60Hz
Max Power Rating	15A Resistive \ 8A Tungsten \ 1/3 HP
Wireless Type	2.4GHz \ IEEE 802.11 b/g/n
Wi-Fi Range	25M

◆ Software Installation



Scan QR Code or search “Chome” in Google Play or the App Store to download and install the app.

Chome 🔍




◆ Register

If you don't have an app account, register an account as following steps:


1. Open the Chome app and tap “Register” to enter the registration page.

2. The system automatically recognizes your country/ area. You can also select your country code. Enter the mobile number/ E-mail and tap “Next”

3. If you enter the mobile number, then enter the verification code in the message, as shown in the picture, and enter the password, tap "Confirm" to finish your registration.

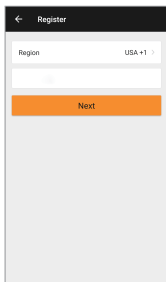


The screenshot shows the 'Register' screen. At the top, there is a back arrow and the title 'Register'. Below this, there is a 'Region' label and a dropdown menu showing 'USA +1'. Underneath is a text input field. A large orange button labeled 'Next' is positioned below the input field.

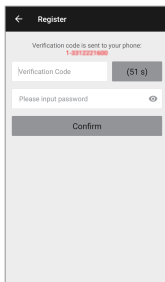


The screenshot shows the 'Register' screen after the 'Next' button is tapped. It displays a message: 'Verification code is sent to your phone: 1-8813221600'. Below this is a 'Verification Code' input field and a timer '(51 s)'. Underneath is a 'Please input password' field with an eye icon. A grey button labeled 'Confirm' is at the bottom.

You can also sign in with verification code by SMS without registering.

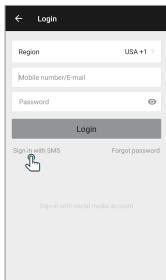

The screenshot shows the 'Login' screen. At the top, there is a back arrow and the title 'Login'. Below this, there is a 'Region' label and a dropdown menu showing 'USA +1'. Underneath is a text input field labeled 'Mobile number/E-mail'. Below that is a 'Password' input field with an eye icon. A grey button labeled 'Login' is positioned below the password field. At the bottom, there are two links: 'Sign in with SMS' (with a hand icon) and 'Forgot password'. A faint link 'Sign in with social media account' is also visible at the very bottom.

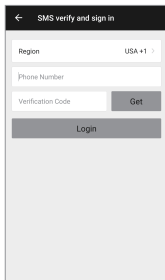


The screenshot shows the 'SMS verify and sign in' screen. At the top, there is a back arrow and the title 'SMS verify and sign in'. Below this, there is a 'Region' label and a dropdown menu showing 'USA +1'. Underneath is a 'Phone Number' input field. Below that is a 'Verification Code' input field and a grey button labeled 'Get'. A grey button labeled 'Login' is at the bottom.

Note: Each device can only be connected to one account. If anyone else needs to control it, please share your device via the app.


◆ Add Device

1. Plug the smart plug into a socket.


2. Sign in your account and tap the “+” button on the top right corner of the app, and then choose the “Electrical Outlet”.




4. Select the Wi-Fi that the smart plug will connect to. Enter the Wi-Fi password and confirm. As shown in the figure:




3. Press and hold the program button on the smart plug for over 5 seconds, and confirm that the LED indicator is blinking rapidly.



5. The app will proceed with the connection process, as shown in the figure.


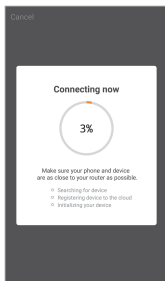


6. After the connection process is complete and indicator (red) on the smart plug will stop blinking, the plug has been connected and is ready for operation.

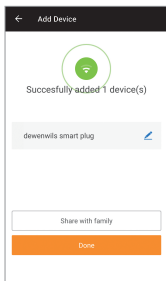

Warm Tips:

If the Wi-Fi signal is weak or cannot connect with device, please tap the “AP Mode” on the top right corner to enter the AP mode.



Then tap “how to make indicator slowly blink” to view operation processes.

Note :

Wi-Fi outlet configuration only supports a 2.4GHz Wi-Fi network. A 5GHz router supports both 2.4GHz and 5GHz network at the same time, please make sure the names of the network are different, and then connect to the 2.4GHz network.

◆ Works with Amazon Alexa

● Link Chome account to Alexa

1. Open your Alexa app, tap “Skills” in the menu, and then search “Chome”. Select “Chome” and tap “Enable” to enable the Chome skills.
2. You will be directed to the account link page. Type in your “Chome” account and password, don’t forget to select your country/ region where your account belongs to. And then tap “Link Now” to link your Chome account.

● Control your smart devices

Discover devices

Echo needs to discover your smart devices before it controls them. You say “Alexa, discover devices” to Echo. Echo will discover devices which have already been added in Chome app. You can also tap “discover devices” to discover the smart devices. Discovered devices will be shown in the list.

Note : Every time you change the device’s name on the Chome app, Echo must re-discover before you control them.

◆ Works with Google Home

● Add Device to Home Control

Open your Google Home app, add device in Home Control of the Google Home app. Select “Smart Life”, and fill in the correct login information of your Chome account to finish the account linking. Your device will be shown in Home Control device list.



◆ Multi-functional Timer

- This smart plug is designed with **programmable**, **random**, **countdown**, and **repeat** timer functions, you can schedule the smart plug switch to turn on and off automatically as needed.

1. Program

A. You can set the on/off time in a 7-day period with a 1 minute interval according to your needs. Every program you set repeats weekly.

The 'Edit Timer' screen shows a time selection interface. It has a title bar with 'X Edit Timer' and 'Save'. Below the title bar, there's a large display showing '16:43 — 23:15'. Below this, there's a table for selecting start and end times. The table has two columns: 'Start Time' and 'End Time'. The 'Start Time' column has rows for hours 13 to 19, and the 'End Time' column has rows for minutes 12 to 18. The selected time is 16:43 for the start and 23:15 for the end. Below the table, there's a section titled 'Select days to use Smart Mode' with seven buttons: Mon, Tues, Wed, Thurs, Fri, Sat, and Sun. The 'Tues' button is highlighted in green. Three numbered annotations point to specific elements: ① points to the start time '16:43', ② points to the end time '23:15', and ③ points to the 'Tues' day selection button.

① Set the hours and minutes of the start time

② Set the hours and minutes of the end time

③ Select the desire day



Start Time	End Time
13 40	20 12
14 41	21 13
15 42	22 14
16 43	23 15
17 44	16 16
18 45	17 17
19 46	18 18

Select days to use Smart Mode



Mon **Tues** Wed Thurs Fri Sat Sun

B. After finished, tap “Save” and the program has been activated automatically.

If you want to set multiple on/off schedules, repeat as step A-B. You can also shut any of these settings at any time.



2. Countdown



Tap “Countdown” to set the hours and minutes, and then tap the start button. The smart plug will maintain the current state (on or off) until the end of the countdown. It will exit countdown mode automatically if you turn on/off manually.

3. Random

Either +/- 30 minutes than setting ON/OFF time, randomly control lights or other devices when you are away from home, make it appear as if you're still at home to deter intruders.

The setting process is the same as “Program”.

4. Repeat

You can set the duration of each on and off, the start and end time according to your needs. The on/off schedule will repeat between the start and end time. For example: You set a period from 9:00AM to 6:00PM, turn on your electric fan for one hour, and off for two hours. The outlet will repeat on/off from 9:00AM to 6:00PM.

The 'Add Timer' interface shows a time selection grid for a 24-hour period. The selected time range is 09:00 to 18:00. Below the grid, there are two input fields for durations: 'Turning on duration' set to 1 hour 0 min and 'Turning off duration' set to 2 hours 0 min. At the bottom, there are seven circular buttons representing the days of the week: Mon, Tues, Wed, Thurs, Fri, Sat, and Sun. The 'Add' button is at the bottom right.

Start Time		End Time	
06	57	15	57
07	58	16	58
08	59	17	59
09	00	18	00
10	01	19	01
11	02	20	02
12	03	21	03

Turning on duration: 1 hour 0 min

Turning off duration: 2 hours 0 min

Select days to use Smart Mode

Mon Tues Wed Thurs Fri Sat Sun

The 'Repeat' interface shows the selected time range 09:00 to 18:00. Below this, it displays the on/off schedule: 'On: 1h 0m' and 'Off: 2h 0m', followed by the days 'Mon, Wed, Thurs, Sat, Sun'. A toggle switch is on the right, currently turned on. At the bottom, there is a large 'Add' button.


09:00 — 18:00

On: 1h 0m Off: 2h 0m

Mon, Wed, Thurs, Sat, Sun



Add

If you want to delete the schedule you set, please keep pressing the schedule, there will be a dialog box. Tap “Confirm” and delete the schedule.

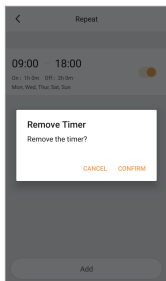

Share Devices with Your Family

Tap “Profile” on the home page and find “Device Sharing”, please operate as Device Sharing -Add- Share with new member. You should input a registered account and share the device with him. Then the new member can control the shared device.

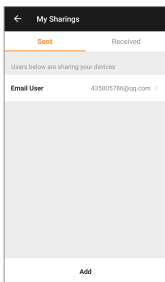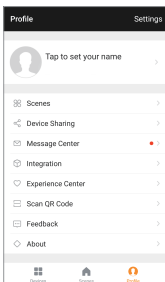

The control system will continue to be upgraded. If you have any questions for future usage, please feel free to contact us. Our dedicated customer service team will get back to you within 24 hours.

One-Year Limited Warranty:

Dewenwils warrants this product to be free from defects in material and workmanship for a period of one year from the date of purchase.

Warranty is void if damage is caused by misuse or improper installation.

Please contact us if you have any questions.

Email: dewenwils@hotmail.com.

Our dedicated customer service team will get back to you within 24 hours.