


E-100-LBTV2- BOOT-5/ PACK

High-Profile End Seal Boot Installation Instructions

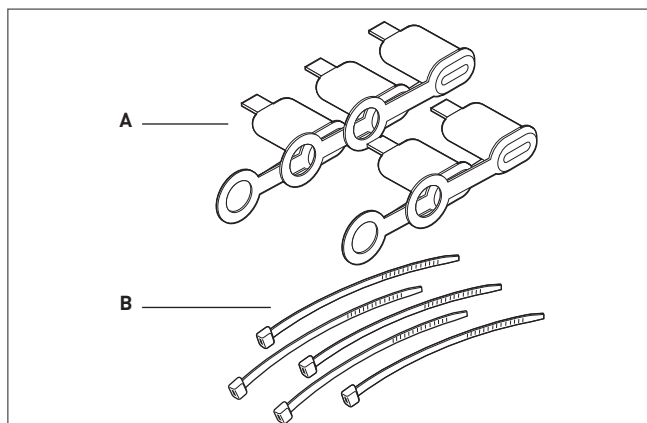

KIT CONTENTS

Item	Qty	Description
A	5	Boots
B	5	Cable ties

⚠ WARNING:

This component is an electrical device that must be installed correctly to ensure proper operation and to prevent shock or fire. Read these important warnings and carefully follow all of the installation instructions.

- To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of Chemelex, agency certifications, and the National Electrical Code, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection.
- Component approvals and performance are based on the use of Chemelex-specified parts only. Do not substitute parts or use vinyl electrical tape.

- The black heating cable core is conductive and can short. It must be properly insulated and kept dry.
- Keep components and heating cable ends dry before and during installation.
- Damaged bus wires can overheat or short. Do not break braid or bus wire strands when scoring the jacket or core.
- Bus wires will short if they contact each other. Keep bus wires separated.
- Leave these installation instructions with the user for future reference.

DESCRIPTION

The Raychem E-100-LBTV2-BOOT-5/PACK kit contains five replacement boots for use with the E-100-LBTV2 end seals. Boots may be used several times on the same heating cable end. Do not reuse a boot on another heating cable. Also, boots should be replaced whenever they are damaged or the sealant appears dry or contaminated or is missing. These boots must be used with the entire E-100-LBTV2 end seal kit; they must not be used alone.

The boots may be installed at temperatures as low as -40°F (-40°C). For easier installation, store kit above freezing until installation.

For technical support call Chemelex at (800) 545-6258.

TOOLS REQUIRED

- Wire cutters
- Adjustable pliers

⚠ CAUTION:

HEALTH HAZARD: Prolonged or repeated contact with the sealant in the end seal boot may cause skin irritation. Wash hands thoroughly.

Overheating or burning the sealant will produce fumes that may cause polymer fume fever.

Avoid contamination of cigarettes or tobacco.

Consult MSDS VEN 0058 for further information.


CHEMTREC 24-hour emergency telephone:
(800) 424-9300

Non-emergency health and safety information:
(800) 545-6258.

1

- Turn off power.
- Clip cable tie and remove.


⚠ WARNING: Shock Hazard.
Conductors will be exposed. Re-entry should be performed by a qualified electrician. Follow standard electrical lockout procedures before opening end seal.



END SEAL
ELECTRIC TRACED
Raychem

2

- Remove cap.

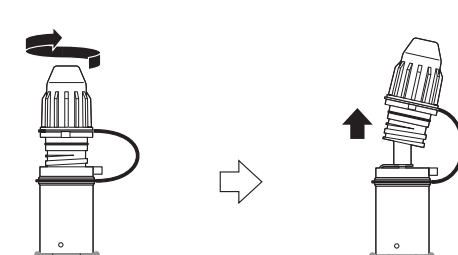


END SEAL
ELECTRIC TRACED
Raychem

END SEAL
ELECTRIC TRACED
Raychem

3

- Remove boot.


⚠ CAUTION: Health Hazard. Wash hands after contact with sealant. Consult material safety data sheet VEN 0058.



END SEAL
ELECTRIC TRACED
Raychem

4

- Place loop of new boot around the cable.
- Push boot onto the end of the cable until it bottoms out. Be careful not to squeeze sealant out of boot.

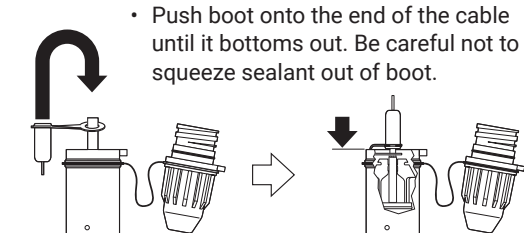


END SEAL
ELECTRIC TRACED
Raychem

END SEAL
ELECTRIC TRACED
Raychem

5

- Install cap; tighten until slots on cap and stand align.
- Install cable tie.

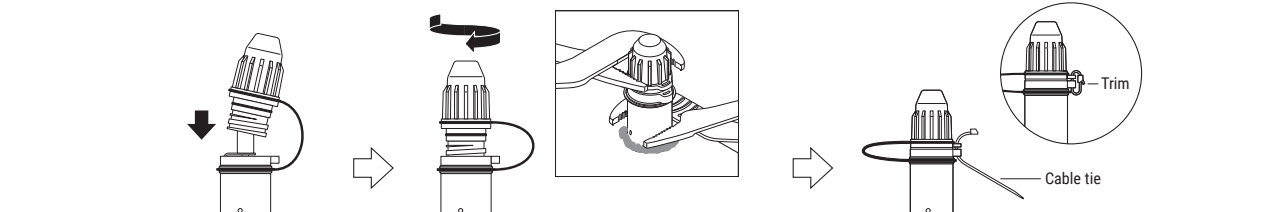

END SEAL
ELECTRIC TRACED
Raychem

North America

Tel +1 800 545 6258
info@chemelex.com

Latin America

Tel +1 713 868 4800
info@chemelex.com

Europe, Middle East, Africa, India

Tel +32 16 213 511
Fax +32 16 213 604
info@chemelex.com

Asia Pacific

Tel +86 21 2412 1688
infoAPAC@chemelex.com

chemelex
excellence is everything

Raychem

Tracer

Pyrotenax

Nuheat