

## **Features**

- Max. Display 5999
- Auto/Manual Range
- NCV Function
- RMS Measurement
- Relative
   Measurement
- Back Light
- Data hold
- Continuity Test
- Low Power Indication
- Auto Power Off
- Low Battery Detect
- Power: Battery 6F22 (9V)X1
- 190 x 90 x 40mm (7.48 x 3.54 x 1.57 inch)
- Weight: ~500g (including battery) (17.63 Ounces)

## **RS PRO Digital Multimeters**

RS Stock No.: 296625



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.



## **Digital Multimeters**



### **Product Description**

**296625** CATIV Safety TRMS Digital Multimeter series is a handheld device which can voltage, electrical current, resistance and continuity. Can also measure capacitance, diode and temperature with features a NCV (Non-contact voltage) along-with option of plug and play USB for connection with PC (only in 296637) .



### **General Specifications**

Function	Value			
DC Voltage	600mV±0.5%,6/60/600V±0.8%,1000V±1.0%			
AC Voltage	600mV/6V/60V/600V±1.0%,1000V±1.5%			
DC Current	600μA/6000μA/60mA/600mA/6A/10A±1.5%			
AC Current	600μA/6000μA/60mA/600mA±1.5%,6A/10A±3%			
<b>Resistance</b> $600\Omega/6K\Omega/600K\Omega/6M\Omega\pm0.5\%,60\Omega\pm1.5\%$				
Capacitance	60nF±3%,600nF/6μF/600μF/600μF/6mF±5% (60mF)			
Logic Frequency	10 Hz ~ 1MHz ±(0.1%+3)			
Linear Frequency	6 Hz ~ 10KHz ±(0.05%+8)			
Frequency	10 Hz ~ 1MHz ±(0.1%+3)			
Temperature	1-55°C~0°C ±5.0% (-67°F~32°F), 0°C~1000°C±2.0% (32°F~1832F)			



### **Pocket Multimeter Selection Guide**

	296625
Auto Range	ACV/DCV/Resistance/Continuity/Diode/Temperature/ NCV/mA/A
DC Voltage	2V/20V/200V/600V±(0.5%+3)
AC Voltage	2V/20V/200V/600V±(1.0%+3)
DC Current	20mA/200mA/1A±(1.0%+3)
AC Current	20mA/200mA/1A±(1.5%+3)
Current Plug-in Detect	Yes

#### **Panel and Constructure**



- LCD display
   Used for displaying the measuring results and
   various symbols.
  - Keypad
    Measurement function keys.
- (3) Rotary switch Used for selecting measurement functions.
- (I) VIQ

Terminal receiving the red test lead for voltage, resistance, capacitance, frequency, Temperature, diode and continuity measurements.

⑤ uA/mA

Terminal receiving the red test lead for μ A, mA measurements.

- A Terminal receiving the red test lead for 6A,10A measurements.
- COM Terminal receiving the black test lead as a common reference.

# **Digital Multimeters**



## **LCD** and Symbol



No.	Symbol	Meaning				
1::		Indicates negative readings				
2	AC.	Indicator for AC voltage or current				
3	DC	Indicator for DC voltage or current				
4	AUTO	The meter is in the Autorange mode in which the meter automatically selects the ran with the best resolution.				
5	PC-LINK	The Meter is in the data transmission mode.				
6	н	The meter is in Data Hold mode.				
7	REL	The meter is in Relative Measurement mode.				
8	MAX	Display maximum data				
9	MIN	Display minimum data				
10	- 0	Low battery indication				
11	*4	The meter is in Continuity Check mode.				
12	**	The meter is in Diode Test mode.				
13	%°C'F KMΩHz nµmFAV	Measurement units				
14	DL	This symbol means that the input is too large for the selected range.				

# **Digital Multimeters**



### **Contents**



L190 x W90 x D42mm L7.5"x W3.5"x D1.7" 412g/ 0.91lb



Battery 9V 6F22x 1



Test Leads K-type Thermocouple Battery




### **Packaging Information**





## **Main Applications**

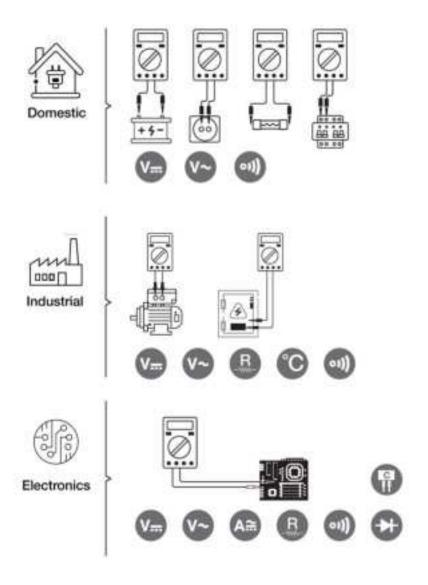

## **Order Details**

Stock No.	Brand	Product	Multimeter	Functions	Digit
		Name	Туре	Measured	Resolution
296625	RS Pro	Digital	Handheld	Auto Range,	-
		Multimeters		1000V AC/DC,	
				10A AC/DC, Ω,	
				CAP, Hz, ⁰C	