

# JCHR35H6 SERIES REMOTE SPECIFICATION

## Product Introduction

JCHR35H6 series remote has 5/6/9/13/15 buttons, respectively named as

JCHR35H6A/B/C/D/E, the renderings as below:



JCHR35H6A



JCHR35H6B



JCHR35H6C



JCHR35H6D



JCHR35H6E



JCHR35H6F

Note: JCHR35H6 series remote uses the same PCB board, only different in screen printing.

## Product Parameters

- Wireless frequency: 2.4G Hz;
- With blue backligh, JCHR35H6 has blue backlight +one pcs tricolor light
- Remote is equipped with a toggle switch, when two control boxes are synchronized, can use remote to choose single control or synchronization.
- The remote control is equipped with a toggle switch. When the two controllers are synchronized, you can select single action or synchronization through the toggle switch.
- Use AAA 4.5V power supply;
- With low power consumption, standby power consumption  $\leq 10\mu\text{A}$
- The remote control distance is  $\leq 5$  meters
- Button form: silicone button


## Optional

- ☒ Color:black
- ☒ Wireless frequency: 2404 MHz to 2479 MHz

## Usage





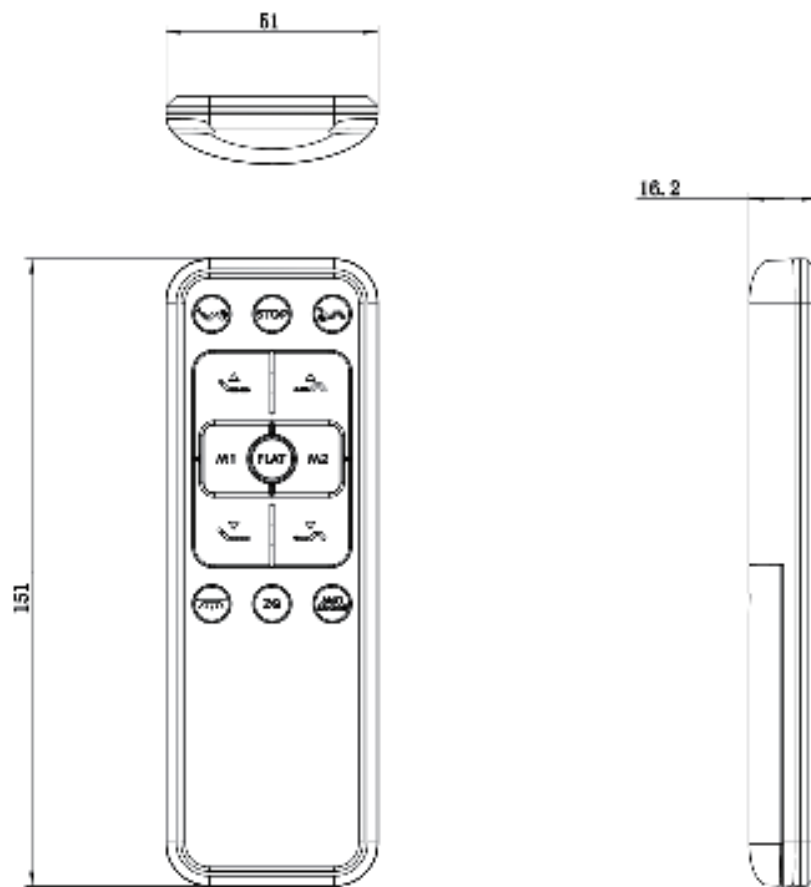







- Matching control box: home appliance or medical control box;
- Indoor Use
- Storage and transportation temperature:  $-25^{\circ}\text{C}\sim 70^{\circ}\text{C}$

## Dimensions



## Button function

Button icon	Button definition	Button No.	Remark
	M1 Head Up	0x01	
	M1 Head down	0x04	
	M2 Foot Up	0x02	
	M2 Foot down	0x05	
	M3 Neck Up	0x14	

	M3 Neck down	0x15	
	Flat	0x08	
	Memory Position 1	0x0a	
	Memory Position 2	0x0c	
	Zero Gravity	0x07	
	Anti Snore	0x09	
	TV Preset	0x18	
	Vibration motor timing switch	0x57	
	Foot Massage	0x0f/0x12	
	Vibration motor mode switch	0x11	
	Back Massage	0x0d/0x10	
	Under-Bed Lighting	0x13	


## Code Matching Function

Match the remote with the control box so that the remote can control the corresponding control box.

Method:

After the control box plugged in AC, enter the code matching mode,

simultaneously press the "M1 Up + M2 Up" buttons on the remote (the same as

below) , When hearing the control box "tick" and the backlight of the remote flashes twice, it means that the code matching is successful.

#### FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user' s authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

#### RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Note : This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions,

may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### ISED RSS Warning/ISED RF Exposure Statement

##### ISED RSS Warning:

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ISED RF exposure statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. The device has been evaluated to meet general RF exposure requirement.

Le matériel est conforme aux limites de dose d'exposition aux rayonnements énoncés pour un autre environnement. ce dispositif a été évalué à satisfaire l'exigence générale de l'exposition aux rf.