

iSwitch 201HKL

4K60 2x1 HDMI KVM Switcher Lite

Datasheet V1.0



Table of Contents

1. DESCRIPTION	3
2. FEATURES	3
3. PACKAGE LIST	3
4. PANELS	4
5. SPECIFICATION	5
6. DIAGRAM	6
7. CONTROL.....	ERROR! BOOKMARK NOT DEFINED.
7.1 BUTTON CONTROL	ERROR! BOOKMARK NOT DEFINED.
7.2 HOT KEY CONTROL	ERROR! BOOKMARK NOT DEFINED.
7.3 AUTO CYCLING MODE	ERROR! BOOKMARK NOT DEFINED.
7.4 RS232 CONTROL	ERROR! BOOKMARK NOT DEFINED.

1. DESCRIPTION

This 2x1 HDMI2.0 KVM Switch provides you with great flexibility in integrating cross-platform computer equipment easily. It makes you available to switch easily and reliably between any HDMI computers using one HDMI compliant display.

The 2x1 HDMI2.0 KVM Switcher not only have 2 USB 2.0 ports but also have keyboard and mouse ports. While using the mouse and keyboard control, USB2.0 can also be connected to USB drive and hub at the same time. By using USB 2.0 hub ports on the KVM, you even can attach USB drive, printer, barcode scanner, web cam, USB microphone/ speaker or other USB devices to the KVM. Switching can be controlled through variable methods, such as the front panel buttons, RS232 and hot keys on keyboard.


2. FEATURES

- Using only 1 set of keyboard, mouse and monitor to control 2 computer devices
- Support hot key commands and mouse gesture to switch inputs
- Support front panel buttons, RS232, keyboard hot keys to control KVM switch.
- Available to use keyboard without any delay after switch input sources
- Support resolution up to 3840*2160@60Hz 4:4:4
- Compliant with and HDCP 2.2, HDMI2.0
- Support USB 2.0 for printers, USB drive, web cam, USB microphone/ speaker etc
- Support Unix/Windows/Debian/Ubuntu/Fedora /Mac OS X/Raspbian/Ubuntu for Raspberry Pi and other Linux based system.
- Support hot plug, connect or disconnect devices to the KVM switch in any time and without turning off devices.
- Support HDR 10 and Dolby Vision
- Plug and play.

3. PACKAGE LIST

- 1x iSwitch 201HKL
- 1x DC to USB power cable
- 2x USB Cables
- 1x User manual

4. PANELS

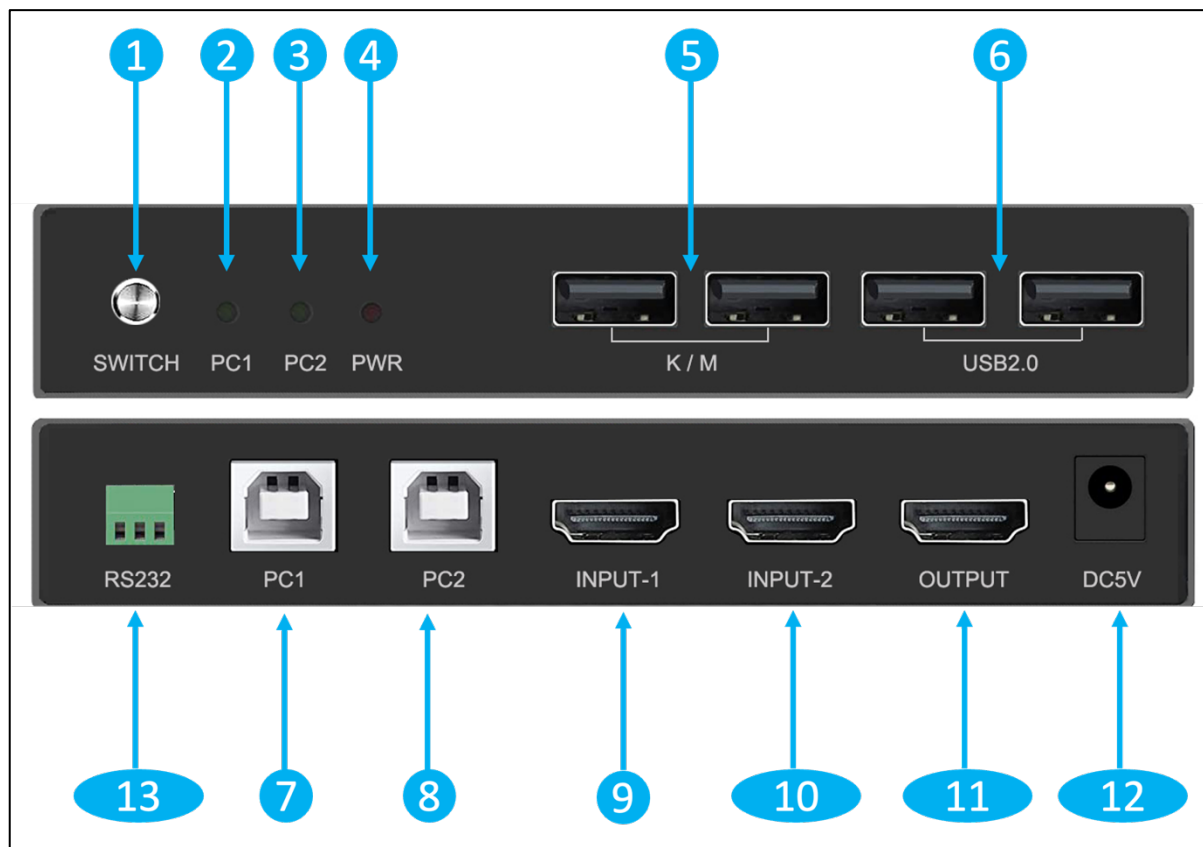

No.	Ports	Descriptions
1	Switch	Switching PC1 or PC2
2	Indicator	PC1 Indicator
3	Indicator	PC2 Indicator
4	Indicator	Power Status Indicator
5	2x USB A 2.0	Keyboard and Mouse
6	2x USB A 2.0	USB devices
7	1x USB B 2.0	To PC1 host
8	1x USB B 2.0	To PC2 host
9	1x HDMI A Input	To PC1

10	1x HDMI A Input	To PC1
11	1x HDMI A Output	To display
12	DC 5V	Power Supply IN
13	1x 3-pin block terminal	RS232 Control

5. SPECIFICATION

Model	iSwitch 201HKL
Name	4K60 2x1 HDMI KVM Switcher Lite
Protocol	HDMI 2.0; HDCP 2.2
HDMI Bandwidth	18Gbps
Resolution	Up to 3840x2160@60Hz 4:4:4
HDMI Port	2x HDMI Type A
HDMI Cable	Less than 5 meters at 1080p@60Hz
RS232	3-pin connector
Baud rate	1152000bps
Data bit	8bits
USB2.0	2x USB 2.0 type A devices ports
PC1/2	2x USB 2.0 B
K/M	USB-A, Keyboard and mouse
Supported OS	Unix/Windows/Debian /Ubuntu /Fedora /Mac OS X/ Raspbian /Ubuntu for Raspberry Pi and other Linux based system
Power adapter	DC 5V

ESD Protection	Human body model - $\pm 8\text{kV}$ (Air-gap discharge)
Temperature	$-5^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Humidity	5% ~ 90%
Product Dimension	145(L) x 67(W) x 22(H) mm
Warranty	3 years

6. DIAGRAM

