



1

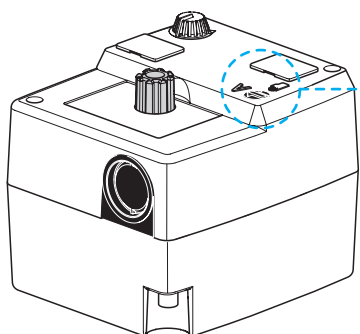

AC 230 V







3

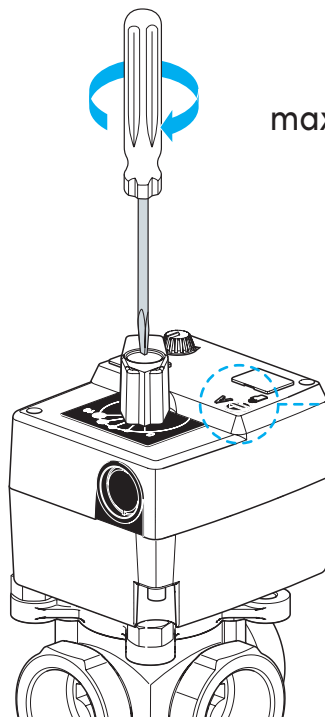

max 0.8 Nm



2

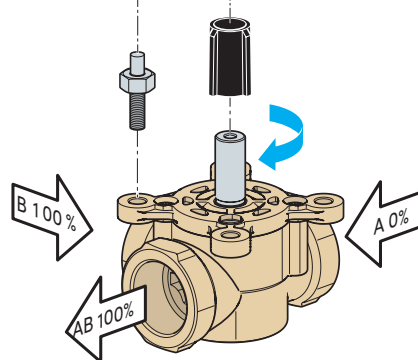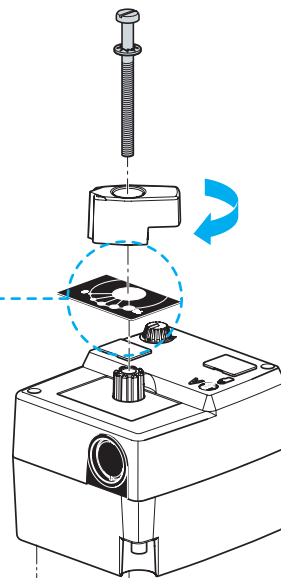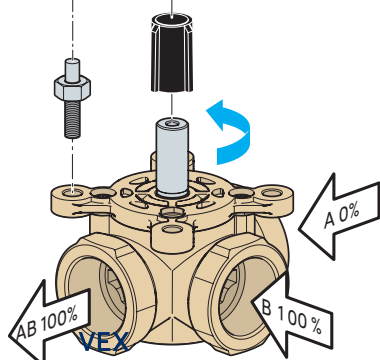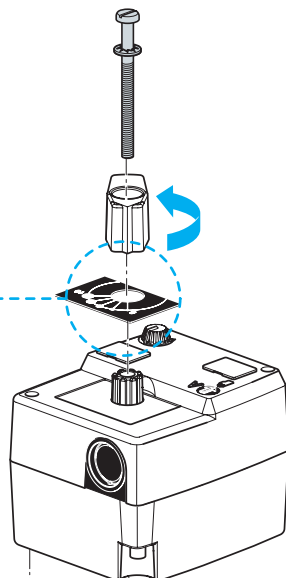

VEXVE / VEXVE
ARMATURY
GROUP

Vexve Oy




Pajakatu 11
38200 Sastamala
Finland

Riihenkalliontie 10
23800 Laitila
Finland





Tel. +358 734 0800
vexve.customer@vexve.com

www.vexve.com

4

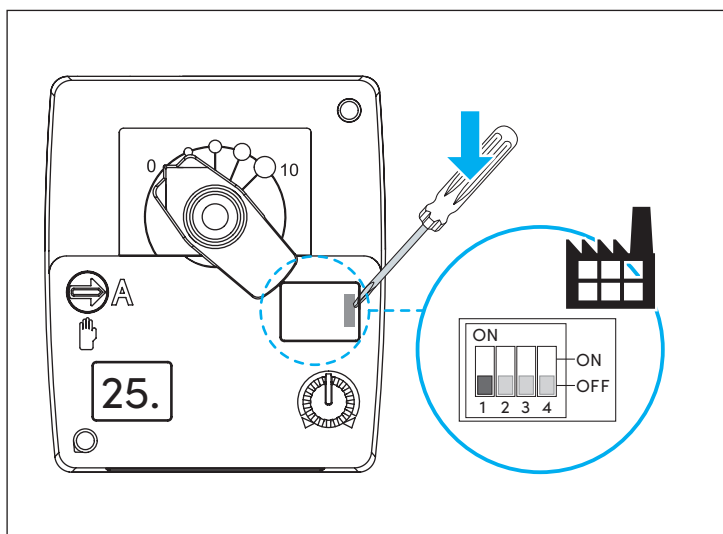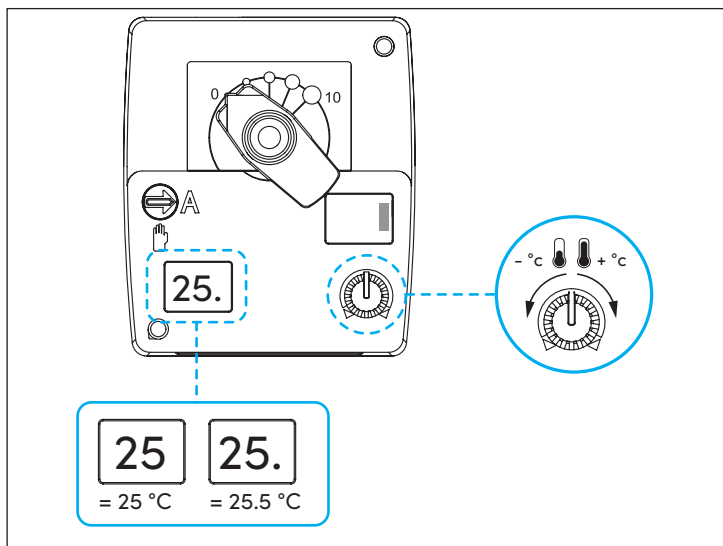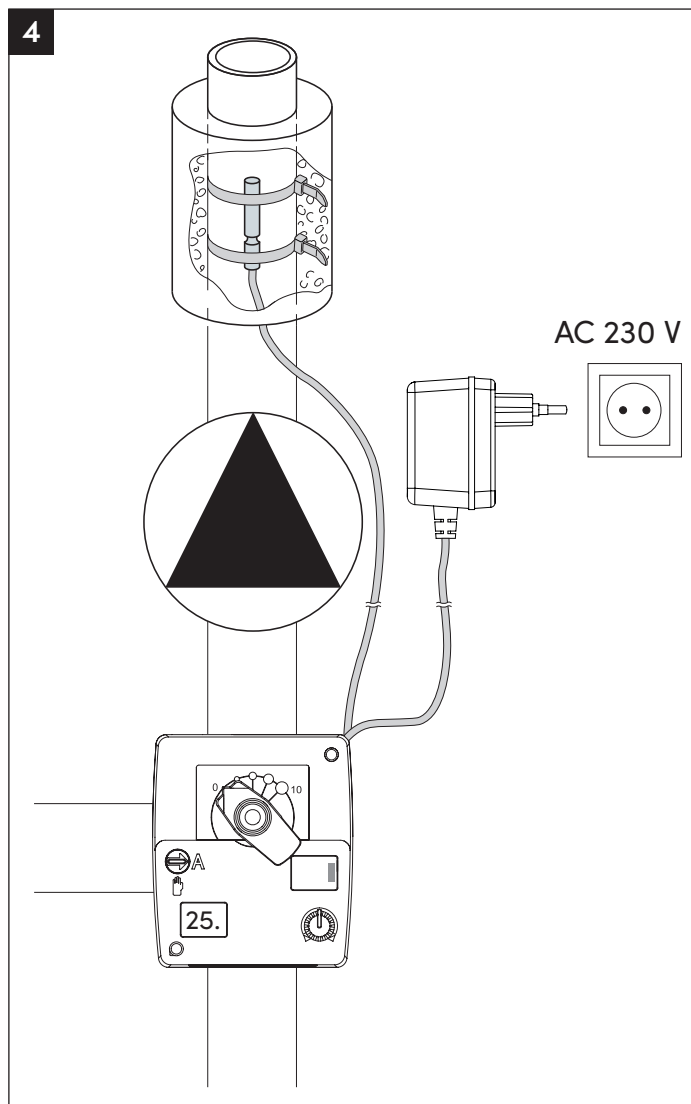


DIP 1




OFF → ON = 0° ↷ 90°
ON → OFF = 0° ↷ 90°

DIP 2, 3


20...80 °C




0...95 °C




60...85 °C




25...45 °C



DIP 4



x10



x1

