


LARK C1

User Manual

V2.0



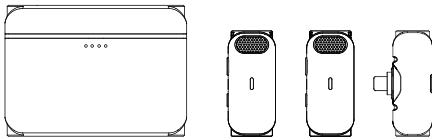

LARK C1

* The configuration is based on the product package and is subject to the actual quantity of equipment purchased.

PACKING LIST

LARK C1 SOLO (TX*1 to RX*1) Wireless Microphone System



① Transmitter *1




② Receiver *1



③ USB-A to USB-C Cable *1



④ Furry Windshield *1



⑤ Storage Case *1



⑥ User Manual *1




⑦ Warranty Card *1

* The configuration is based on the product package and is subject to the actual quantity of equipment purchased.

PACKING LIST

LARK C1 DUO (TX*2 to RX*1) Wireless Microphone System with a Charging Case




① Charging Case *1 ② Transmitter *2 ③ Receiver *1 ④ USB-A to USB-C Cable *1



⑤ Furry Windshield *2 ⑥ Storage Case *1 ⑦ User Manual *1 ⑧ Warranty Card *1


* The configuration is based on the product package and is subject to the actual quantity of equipment purchased.

PRODUCT INTRODUCTION



TX: Transmitter


RX: Receiver





* Indicator Light Guide

- Flashing Blue Light: Device disconnected
- Steady Blue Light: Device connected/ Smart noise cancellation off by default
- Flashing Red Light: Low battery

Pairing Button ①




PRODUCT INSTALLATION



- ① The TX automatically turns on after it is taken out of the charging case. Simply clip the TX on the cloth.
- ② Connect the RX to a mobile phone.
- ③ Charge the mobile phone via the RX.

PRODUCT FUNCTION


Noise Cancellation Function



- ① ◆ Steady Blue Light: Device connected/Smart noise cancellation off by default
◆ Steady Green Light: Smart noise cancellation on

Press the yellow button on the TX to enable the smart noise cancellation function. After the function is enabled, the indicator light turns green.

Charging Case Battery Level




- ② ◆ Flashing Light: Charging
◆ Steady Light: Fully charged


One Indicator Light On	● ○ ○ ○	25%
Two Indicator Lights On	● ● ○ ○	50%
Three Indicator Lights On	● ● ● ○	75%
Four Indicator Lights On	● ● ● ●	100%

PRODUCT FUNCTION



Manual Pairing



TX



RX

After the receiver is connected to the mobile phone, press and hold the '  ' button on the TX and the '  ' button on the RX for 3s.

* The TX and RX have been paired with each other in the factory before shipping. They need to pair with each other again if they are disconnected.

PARAMETERS

Wireless Transmission	2.4GHz Adaptive Frequency Hopping (AFH)
Transmission Range	130ft (40m) for NLOS/650ft (200m) for LOS
Built-in Microphone	Polar Pattern: Omnidirectional Frequency Range: 20Hz–20kHz
Maximum SPL	110 dB
Input Dynamic Range	86 dB
Battery Capacity	TX: 140 mAh (0.518 Wh) Charging Case: 1400 mAh (5.18 Wh)
Operating Time	TX: 8H Charging Case: Maximum 3 times of charging for 2 TX
Charging Time	TX: 1.5H Charging Case: 1.5H
Dimensions	TX: 48x21.5x10mm (1.89"x0.85"x0.4") RX: 48.3x27.6x9mm (1.9"x1.1"x0.35") Charging Case: 83x60x30mm (3.3"x2.4"x1.2")
Weight	TX: 11.5g (0.4oz) RX: 7g (0.25oz) Charging Case: 85.5g (3oz)

APP



LarkSound

Developed exclusively for Lark wireless microphones, the LarkSound app is a perfect design to work together with the microphones. Various functions, such as smart mode setting, parameter configuration, and firmware upgrade, can be achieved in LarkSound.



iOS device version:
v12.0 or later



Android device version:
v8.0 or later



SUPPORT

If you encounter any problems in using the product, please contact Hollyland Support Team via the following ways:

 Hollyland Products User Group

 HollylandTech

 HollylandTech

 support@hollyland-tech.com

 www.hollyland-tech.com

Note:

The frequency range and wireless TX power of the device vary by country and region.

Safety Precautions

Do not place the product near or inside heating devices (including but not limited to microwave ovens, induction cookers, electric ovens, electric heaters, pressure cookers, water heaters, and gas stoves) to prevent the battery from overheating and exploding.

Do not use non-original charging cases, cables, and batteries with the product.

The use of non-original spare parts may cause electric shock, fire, explosion, or other dangers.

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operations are subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operations.

FCC Radiation Exposure Statement:

The device has been tested and complies with FCC SAR limits.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.