



# **Green Lion**

Wireless Microphone with Remote Control

SKU: GNWMICRTCBK



### Table of Contents

Package Contents	2
Charging Case Description	2
Receiver Description	3
Transmitter Description	4
Indicator Guide	5
Remote Control Description	6
Instructions for Use	7
1. Use with Smartphone	7
2. Use with Camera	8
Transmitter Connection Notes	9
Specifications	10
Disposal	11
Warranty	11
Contact Us	11

### **Package Contents**



**Charging Case** 



Microphone Transmitter



Receiver



Charging Cable



User Manual



Earphone



Remote

### Charging Case Description



1




2

- **1.** Battery Indicator: During charging, the display will show the battery percentage, which will change according to the current battery status.
- **2.** Type C Charging Port: The product is equipped with a Type C charging port for efficient and secure charging.

#### Note:

The product is not compatible with fast charging. Please use a 5V 1A power adapter for charging. Exceeding the recommended power rating may result in product malfunction. (Please note that the power adapter is not included.)

## Receiver Description

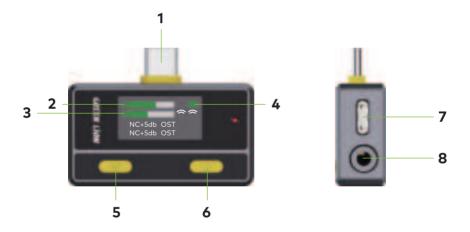

- **1.** Type-C Connect Port to Smartphone: Use this port to connect the receiver to a smartphone.
- **2.** MIC 1 Indicator: Displays volume, recording mode, noise reduction depth, and signal strength for MIC 1.
- **3.** MIC 2 Indicator: Displays volume, recording mode, noise reduction depth, and signal strength for MIC 2.
- 4. Receiver Battery Indicator: The green light remains on when powered,

red light indicates charging, and turns off when fully charged.

- **5.** Mode Button: Switches between Two-Way and One-Way Monitoring Mode.
- **5.1** One-Way Monitoring Mode: Press the Mode Button once; the red light will appear on the display, and you will only hear your own voice.
- **5.2** Two-Way Monitoring Mode: Press the Mode Button again to return to Two-Way Mode; the red light will turn off, and you will hear both MIC 1 and MIC 2.
- 6. Power Button: Press once to turn on the receiver.
- 7.3.5mm Jack Port: Use this port to connect to a digital camera.
- **8.** Type-C Charging Port: Connect the charging cable here to charge the receiver.

## Transmitter Description



- **1.** Rec/Mute/Charging Indicator Light: Displays the current status of the transmitter, indicating recording, mute, or charging mode.
- **2.** Noise Reduction/Bluetooth Indicator: Indicates the current noise reduction or Bluetooth status.
- 3. "+" Button:
- 3.1 Long Press: Mutes the microphone; press again to unmute.


- **3.2** Short Press: Increases microphone volume; you will hear a prompt when the maximum volume is reached.
- **3.3** Short Press Twice: Activates the Evasion function; press again to turn it off (only works in Bluetooth mode).
- 4. Power/Mode Button:
- 4.1 Long Press: Turns the transmitter on or off.
- 4.2 Short Press: Switches between OST/ KTV+ NOISE REDUCTION modes.
- 4.3 Short Press Twice: Toggles the Noise Reduction mode on/off.
- 5. "-" Button:
- 5.1 Long Press: Activates Bluetooth function; press again to turn it off.
- **5.2** Short Press: Decreases microphone volume; you will hear a prompt when the minimum volume is reached.
- 6. Type-C Charging Port: Used to charge the transmitter.
- 7.3.5mm Audio Port for Earphone: Connect an earphone for audio output.

### Indicator Guide

Indicator	Status	Light Mode
Indicator Light 1	Not connected	Green light on continuously
	Connected	Green light flashing slowly
	Noise Reduction mode on	Green light on continuously
	Noise Reduction mode off	Fluorescent yellow light on continuously
	Charging mode	Orange light on continuously

Indicator Light 2	Not connected	Green light on continuously
	Bluetooth Mode Off	Green light flashing slowly
	Bluetooth Waiting to Pair	Green light on continuously
	Bluetooth Paired	Fluorescent yellow light on continuously
	OST Mode On	Orange light on continuously
	KTV Mode On	White light on continuously (light blue light on continuously when in Bluetooth mode)

### Remote Control Description

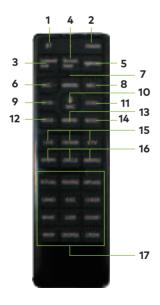

- 1. Bluetooth On/Off button (Bluetooth Name: )
- 2. Evasion On/Off
- 3. Switch to Original Sound Mode
- 4. Switch to Electronic Sound Mode
- 5. Agglutination On/Off
- 6 and 8. Adjust (+/-) Microphone Volume (For MIC 1 and MIC 2)
- 7 and 13. Adjust (+/-) Monitor Earphone Volume
- 8. Mute On/Off
- 9 and 11. Adjust (+/-) Echo (For MIC 1 and MIC 2)
- 12 and 14. Adjust (+/-) Noise Reduction (Works only under noise reduction mode)
- 15. Three Different Sound Modes
- 16. Three Different Sound Change Styles (Lady, Man, Baby)
- 17. Twelve Different Sound Effects

## Instructions for Use

#### 1. Use with Smartphone


#### Step 1:

Long press the power button on both the receiver and transmitter to turn on the devices. The connection light indicator will turn solid green, and the microphone status light will appear on the receiver, indicating that the devices are successfully paired.



#### Step 2:

Connect the receiver to your smartphone through the connector port.



#### Step 3:

Turn on the camera or recorder on your phone, and you're ready to start shooting.



#### 2. Use with Camera

#### Step 1:

Long press the power button on both the receiver and transmitter to turn on the devices. The connection light indicator will remain solid green, and the microphone status light will appear on the receiver, indicating successful pairing.

#### Step 2:

Connect the receiver to the camera through the 3.5mm port.

#### Step 3:

Turn on the camera, and you're ready to start shooting.



## **Transmitter Connection Notes**

How to Reconnect the Transmitter with the Receiver When Disconnected:

- **1.** Under Unconnected Mode: Quickly press the mode button 4 times to initiate pairing with Transmitter 1.
- **2.** For Transmitter 1: Turn on Transmitter 1, quickly press the mode button 4 times. The green light will flash rapidly, indicating that pairing will begin automatically. Turn off the transmitter once the pairing is complete.
- 3. Under Unconnected Mode: Quickly press the mode button 5 times to

initiate pairing with Transmitter 2.

**4.** For Transmitter 2: Turn on Transmitter 2, quickly press the mode button 4 times. The green light will flash rapidly, indicating that pairing will begin automatically.

### Specifications

Frequency	2.4GHz Digital Frequency
Operating Range	Up to 50 Mtr
Sensitivity	-30dB +3dB
Frequency Response Range	20Hz-20KHz
Outputs	3.5mm TRS (for Phone & Camera)
Microphone Sensitivity	-30dB +3dB
Microphone Frequency Response	20Hz-20KHz
Microphone Battery Capacity	180mAh
Charging Case Battery Capacity	1000mAh
Charging Case Input	DC 5V/1A
Transmitter/Receiver Input Current	<25mA

# Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **https://www.greenlion.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

https://www.greenlion.net/warranty



If you have any questions about this Privacy Policy, please contact us at:

Website: https://www.greenlion.net/

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: @greenlion\_global
Instagram: @greenlion\_global