MOEN®

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- Designed to be installed through 1, 4-3/4" diameter hole
- Single function handheld shower
- 59" double interlock spiral hose (metal)
- · Includes integral dual check valves for backflow protection

OPERATION

- · Pivot action lever style handle
- Pull diverter to switch between faucet and handshower

FLOW

- Faucet designed to deliver 6 gpm (22.7 L/min) at 45psi
- · Handshowers designed to deliver 1.75 gpm (6.6 L/min) at 80psi

STANDARDS


- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all
 applicable requirements referenced therein
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- · 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations

Specifications



BELFIELD™
Single Handle Single Riser Floor
Mounted Tub Filler Faucet

Model: 9025 series Floor Mount Rough-In Kit: TS50100 (Joist) TS50110 (Concrete)

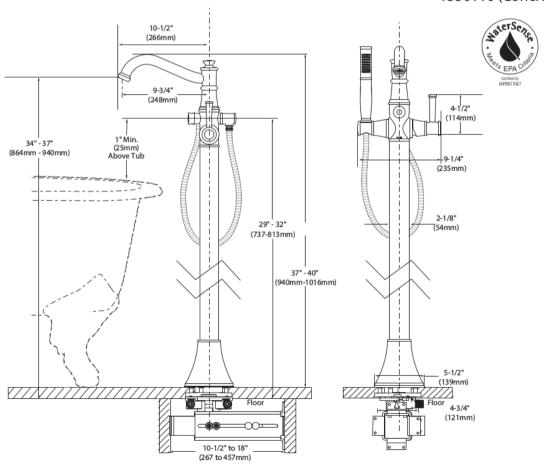

CRITICAL DIMENSIONS

(DO NOTSCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com