

# NVS-10390040CS 40W COAXIAL CEILING SPEAKER WITH MULTIPLE POWER TAP OPTION User Manual







# **Contents**

| Product Overview          | 3 |
|---------------------------|---|
| Description      Features |   |
| Product Dimension         |   |
| Installation Instructions | 4 |
| Technical Parameters      | 5 |
| Specifications            | 6 |



# **Product Overview**


# **Description**

The NVS-10390040CS is a Ceiling Speaker and it can be switched between the ohms terminal 8  $\Omega$  and the voltage terminal 70/100V. The built-in 6.5" speaker driver has a wide frequency response range of 50Hz to 20kHz. It is made of high-quality ABS material, which assure a long-term durability and never out of shape and it will not color fade. It is an ideal choice for industrial and commercial applications like hotel, school, office and factory where background music and paging is required.

### **Features**


- Coaxial structure
- Easy installation
- High-quality ABS material

# **Product Dimension**

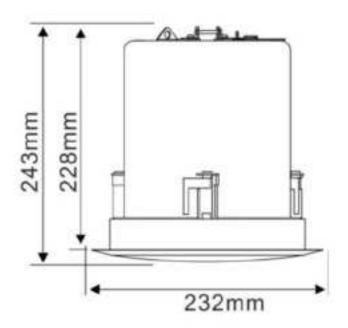




# **Installation Instructions**

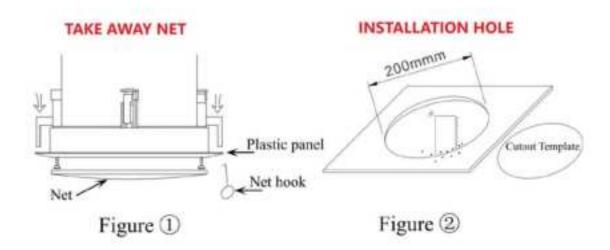



- 1. Pull the net by the net hook (Figure  $\bigcirc$  ).
- 2. Cut an  $\emptyset$ 200mm installation hole on ceiling by the cutout template we sent (Figure 2).
- 3. Pass public address wire through the wire-protecting pipe to connect speaker's terminal, then fix up the strain relief fitting and the terminal cover plate (Figure 3).

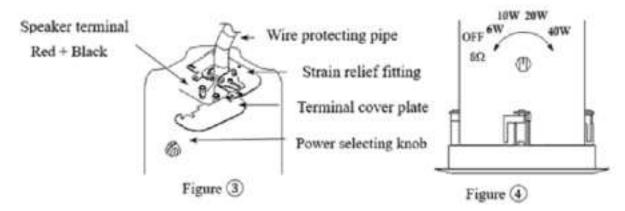

- 4. Select the power by the power selecting knob (Figure 4).
- 5. Attach the auxiliary support line through the support ring to another point (Figure 5).







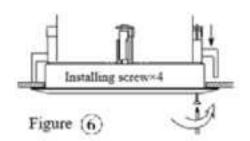

- 6. Push the speaker into the installation hole and turn the installing screw to fix up the speaker on ceiling (Figure 6).
- 7. Push the net into the plastic panel.
- 8. Adjust the direction of set and examine whether it is steady.

# **Technical Parameters**

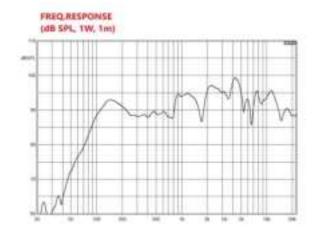

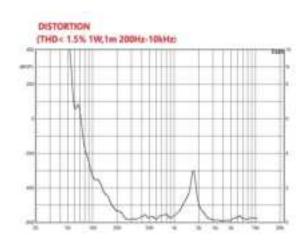



# **Specification**

| Model                   | NVS-10390040CS         |
|-------------------------|------------------------|
| Rated power             | 40W                    |
| Driver Size             | 6.5" X 1, 1 " X 1      |
| Frequency Response      | 50Hz-20kHz             |
| Power Taping Options    | 6/10/20/40W            |
| Input Voltage/Impedance | 70 & 100V/4-16Ω        |
| Coverage Angle          | 150°                   |
| Input Connectors        | Spring loaded terminal |
| Sensitivity (1m,1w)     | 91dB±2dB               |
| Maximum SPL (1m)        | 107dB±2dB              |
| Operating temperature   | -25°C~+57°C            |
| Weight                  | 4.2Kg                  |
| Cutout Size             | Ø200 mm                |
| Dimension               | Ø232 x 243 mm          |