



MACHENIKE KW75 Triple Mode Mechanical Keyboard User Manual

[Home](#) » [MACHENIKE](#) » MACHENIKE KW75 Triple Mode Mechanical Keyboard User Manual 



User Manual of KW75 Triple Mode Mechanical Keyboard With Dual Operation Systems

Contents

1

Product Summary

2

Product Specification

3

Operation Systems Instructions

4


Knob Function Instruction

5

Documents / Resources

Product Summary

1-1.Product Design

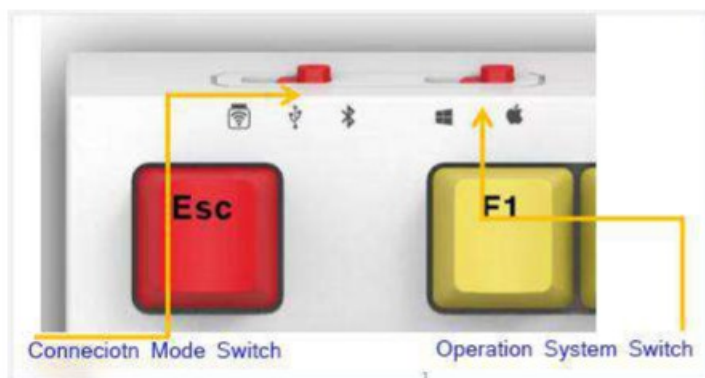

Size & Weight

Size: 333*143*43MM

Weight: 867±10G(not including cable)

Product Specification

81/82 Keys US/UK Layout Mechanical Keyboard
 With Built-in Silicone Cushion
 Hot Swappable Mechanical Switch
 Detachable TYPE-C Charging Cable
 Triple Connection Modes & Dual Operation Systems
 Full Keys Anti-ghosting
 All Keys Programmable By Driver
 FN Combined Keys & Backlight Management
 2-1. FN Combined Multimedia Function
 FN + F1= Open Music App
 FN + F2= Reduce Volume
 FN + F3= Increase Volume
 FN + F4= Mute
 FN + F5= Stop
 FN + F6= Previous Track
 FN + F7= Paly/Pause
 FN + F8= Next Track
 FN + F9= Open Email
 FN + F10=Go to Homepage
 FN + F11=Open My Computer

FN+F12=Open Calculator

2-2.RGB LED Control

FN+PGDN: Turn On/Off the Backlight please be sure the backlight is turning on if you need adjust the backlight

FN+2: Green Backlight

FN+3: Blue Backlight

FN+4-8: Self-Defined Backlight Mode

FN+PGUP Backlight Setting & Save

When press FN+4 to 8 to enter into the corresponding mode, it would start self-setting after pressing FN+PGUP. Press the same key continuously until the backlight color changed to the specified one, then start setting other keys. If

all the keys setting is finished, please press FN+PGUP to save. The CapsLock indicator keeps flashing while setting the

backlight, and it would be off after the setting is finished and saved.

FN+Ins: Change Backlight Modes Total 19 Modes

FN+Del: Change the backlight color 7 Pure Colors Available

FN+↑: Increase Brightness (if up to the highest level, the white backlight of Caps Lock key is flashing)

FN+↓: Decrease Brightness (if up to the lowest level, the white backlight of Caps Lock key is flashing)

FN+←: Decrease Backlight Breathing Speed (if up to the lowest level, the white backlight of Caps Lock key is flashing)

FN+→: Increase Backlight Breathing Speed (if up to the highest level, the white backlight of Caps Lock key is flashing)

2-3 Combined Control Function

FN+ESC: Restore Factory Defaults

FN+Win: Lock the Windows Key and the backlight turns white

Operation Systems Instructions

On top left side of the keyboard, there are two switches which are used to change the connection mode and operation system.

3-1. 2.4G Wireless Connection

Change to 2.4G wireless connection mode while switch to the left, and the 2.4G indicator turns on. Plug the receive to USB output and it starts the connection automatically.

3-2. Wired Connection

Change to wired USB C connection mode while switch to the middle

3-3. Bluetooth Connection

Change to Bluetooth connection mode while switch to the right

FN+Q: Bluetooth 1 Name KW75_1

FN+W: Bluetooth 2 Name KW75_2

FN+E: Bluetooth 3 Name KW75_3

Press FN key, you will find the current connection status from the green light of below keys.

Bluetooth connection mode:

BT1: "Q" Key

BT2: "W" Key

BT3: "E" Key

USB connection mode: "T" Key

2.4G connection mode: "R" Key

3-4. Operation Systems Switch between Windows and Mac OS

Change to Windows system while switch to left and change to Mac OS while switch to right. The function of Win Key and Alt Key will be interchanged under Mac OS.

Knob Function Instruction



: Support Brightness Adjustment and Volume Control, and Press the knob, you could change the working mode.

How to use the knob

Turn left to decrease the brightness and turn right to increase the brightness, and it would restore the default

brightness later
After press the knob, it changes to volume control mode, turn left to decrease the volume and turn right to increase the volume.


Rating

Mac OS X10 12 iOS10 or later version
Voltage 5V
Current 200MA(Top Brightness)/20MA Off Backlight

Hibernation Mode

When connect the keyboard to the device it would move to hibernation mode if no operation more than 5 minutes
press any key to wake up and back to the working status.

Documents / Resources

	<p>MACHENIKE KW75 Triple Mode Mechanical Keyboard [pdf] User Manual KW75 Triple Mode Mechanical Keyboard, KW75, Triple Mode Mechanical Keyboard, Mode Mechanical Keyboard, Mechanical Keyboard, Keyboard</p>
---	--