





MT1010 Mini Oscillo Scope



MAJOR TECH MT1010 Mini Oscillo Scope Instruction Manual


[Home](#) » [MAJOR TECH](#) » MAJOR TECH MT1010 Mini Oscillo Scope Instruction Manual 

Contents

- 1 MAJOR TECH MT1010 Mini Oscillo Scope
- 2 NOTICE TO USERS
- 3 PRODUCT INTRODUCTION
- 4 PANEL INTRODUCTION
- 5 KEY FUNCTION
- 6 SCREEN INSTRUCTIONS
- 7 PRECAUTIONS
- 8 SPECIFICATIONS
- 9 Documents / Resources
 - 9.1 References



MAJOR TECH MT1010 Mini Oscillo Scope

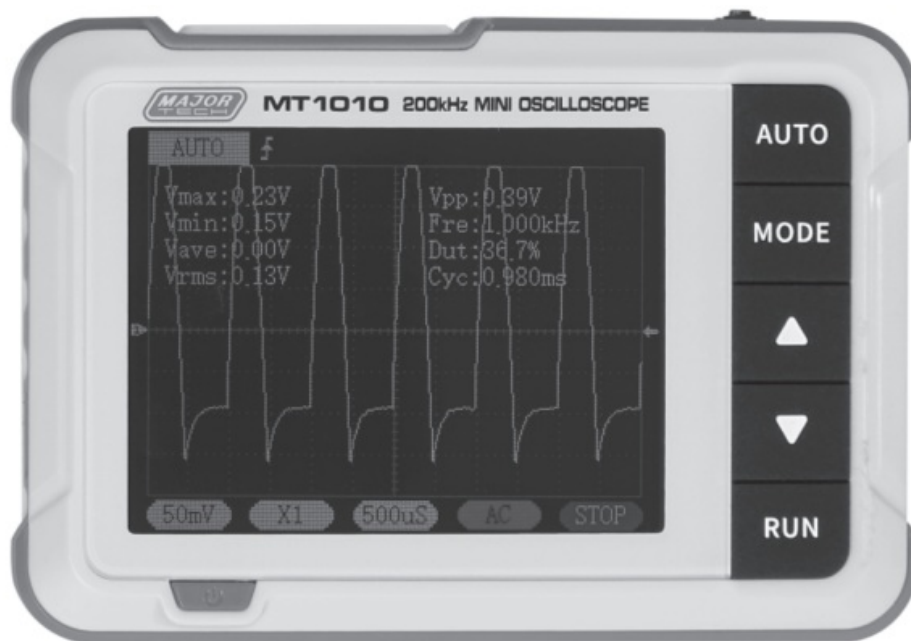


NOTICE TO USERS

- This manual introduces the usage method, precautions and related matters of the product in detail. Before using the product, please read the manual carefully in order to gain a good understanding of the functions of the product.
- Do not use the device in a flammable or explosive environment.
- The used batteries replaced by the device and the discarded device cannot be disposed of together with domestic waste. Please dispose of them according to relevant national or local laws and regulations.
- When there is any quality problem with the device or you have any questions about the use of the it, please contact the customer service of Major Tech, and we will resolve it for you.





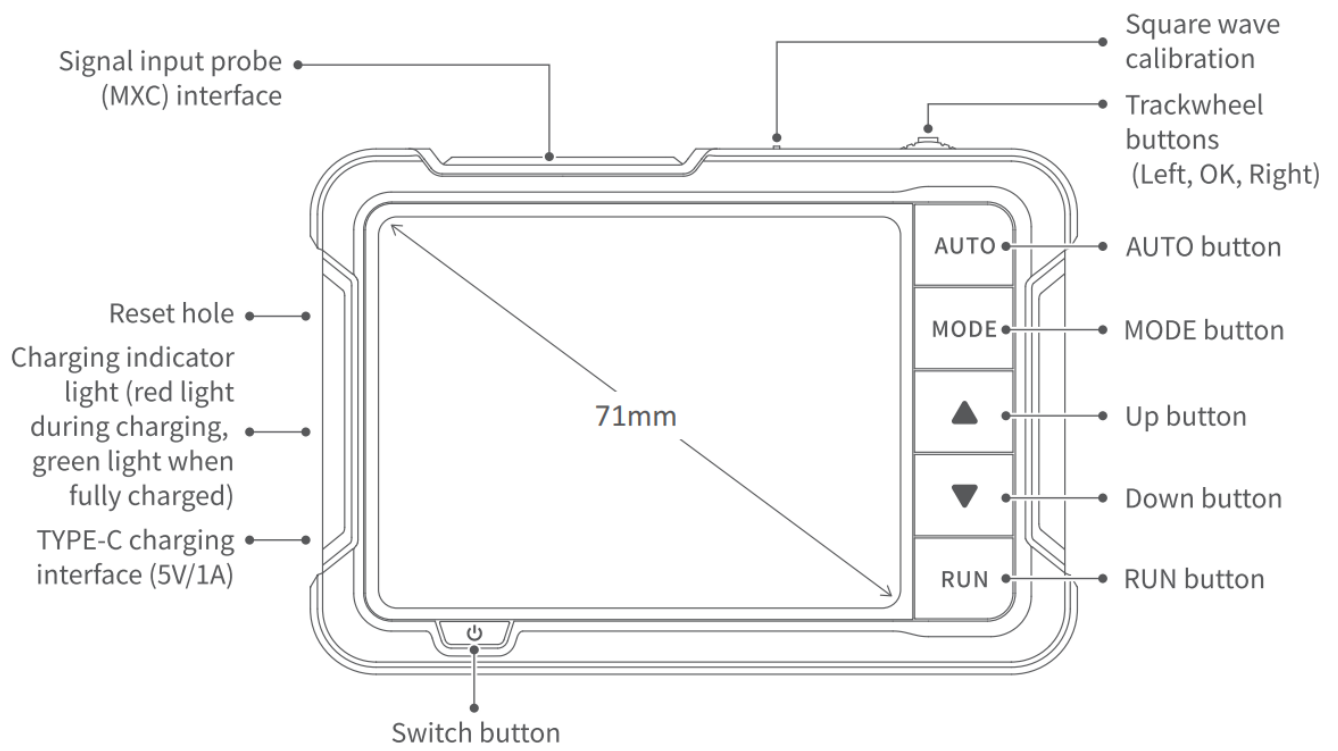

PRODUCT INTRODUCTION

The MT1010 is a highly practical and cost-effective handheld oscilloscope which is aimed at the maintenance industry and the research education industry. The oscilloscope has a real-time sampling rate of 2.5MS/s, a bandwidth of 200kHz, and complete trigger functions (single, normal, and automatic). It can be used freely for both periodic analog signals and nonperiodic digital signals, and can measure voltages up to $\pm 400V$. Equipped with an efficient one-key AUTO, it can display the measured waveform without cumbersome adjustments. Equipped with a 2.8-inch 320×240 resolution high-definition LCD screen. Built-in 1000mAh high-quality lithium battery, can be used continuously for about 4 hours after fully charged.


PANEL INTRODUCTION



KEY FUNCTION

Button	Operation	Function
	Short press	Control parameters function selection
	Short press	Exit auto calibration (Auto calibration page)
	Long press	Enter the automatic calibration page
	Short press	Control parameters function selection
	Short press	Automatic adjustment (frequency below 45Hz cannot be calibrated correctly)
AUTO	Short press	AUTO/Single/Normal switching by pressing mode
MODE	Long press	Rising edge/falling edge switching
	Short press	Parameter addition adjustment
	Short press	Parameter subtraction adjustment
RUN	Short press	Run/pause waveforms (other pages) Enter auto calibration (Auto calibration page)
	Long press	Show/close detailed parameters
	Short press	OFF
	Long press	On

SCREEN INSTRUCTIONS

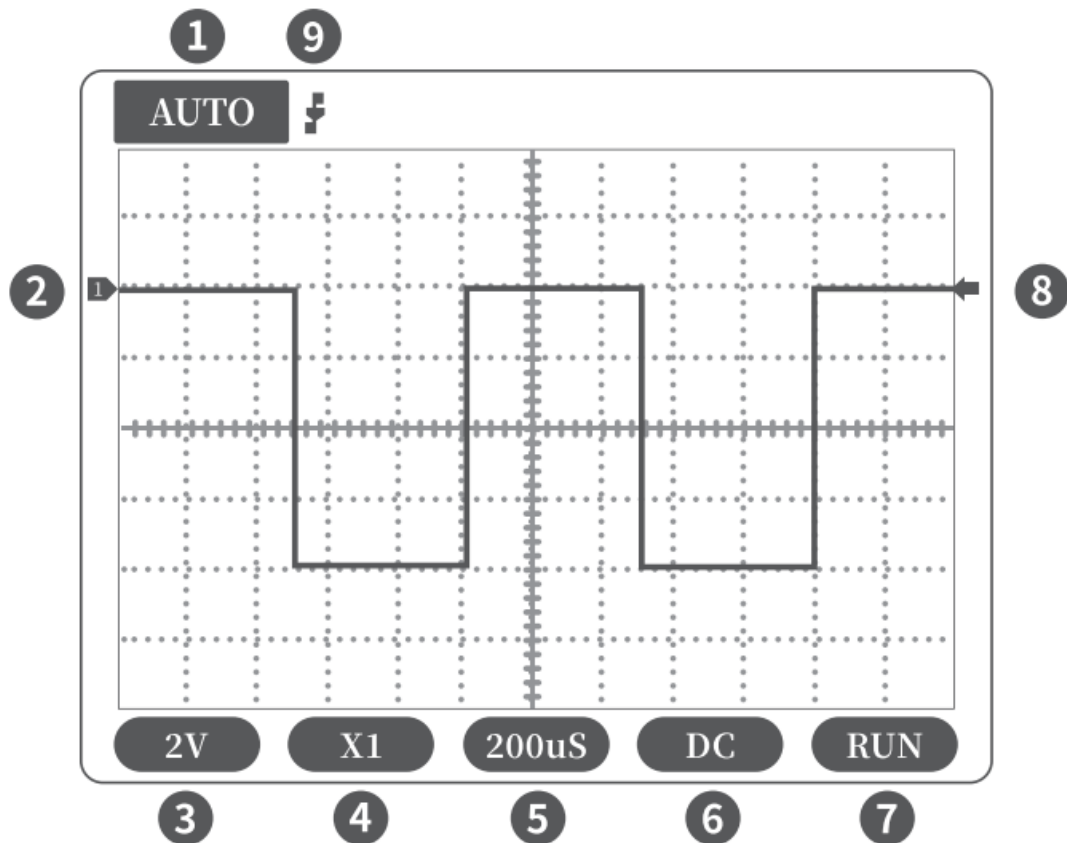

1. Trigger mode indicator icon, Auto means automatic trigger, Single means single trigger, Normal means normal trigger.
2. Baseline indicator icon, this icon indicates the current position is 0V voltage.
3. Vertical sensitivity, which means the voltage represented by a large grid in the vertical direction.
4. 1X/10X mode indicator icon, this must be consistent with the 1X/10X switch setting on the probe handle, if the probe is in 1X mode, then the oscilloscope should also be set to 1X mode, 1X measures $\pm 40V$ voltage, 10X measures $\pm 400V$ voltage.
5. Horizontal time base, indicating the length of time represented by a large grid in the horizontal direction.
6. Input coupling indicator icon, AC means AC coupling, DC means DC coupling.
7. Pause running indicator icon, RUN means running, STOP means pause.
8. Trigger voltage indicator icon.
9. Trigger edge indicator icon.

PRECAUTIONS

- After receiving the device, please use it after fully charged.
- When using the oscilloscope, pay attention to the selection of the gear, the gear of the oscilloscope should be consistent with the gear of the probe.
- When measuring high voltage, it is forbidden to touch any metal part of the oscilloscope to avoid the risk of electric shock.
- Try not to perform a high-voltage test while charging.
- When calibrating, unplug the signal input probe, or shorten the positive and negative poles of the probe.
- The USB firmware upgrade only supports WIN10 or above, and it is forbidden to drag in files other than the released firmware, otherwise it may cause unrecoverable consequences.

- Please use the voltage within the specification range of the manual for charging.

SPECIFICATIONS

- **Sampling rate** 2.5MS/s
- **Bandwidth** 200KHz
- **Vertical sensitivity** 10mV/Div-20V/Div (Progress according to the 1-2-5 way)
- **Time base range** 10μs/Div-50s/Div (Progress according to the 1-2-5 way)
- **Voltage range**
 - **X1:** ±40V (Vpp: 80V)
 - **X10:** ±400V (Vpp: 800V)
- **Trigger method** Auto/Normal/Single
- **Coupling method** AC/DC
- **Display** 2.8 inches / PPI:320×240
- **USB charging** 5V/1A
- **Lithium battery capacity** 1000mAh
- **Square wave calibration** Frequency: 1K Duty cycle: 50%
- **Size** 99 x 68.3 x 19.5mm
- **Weight** 100g

*Size and weight are measured manually, there may be some errors, please refer to the actual product.

South Africa

www.major-tech.com


sales@major-tech.com

Australia

www.majortech.com.au

info@majortech.com.au

Documents / Resources

	<p>MAJOR TECH MT1010 Mini Oscillo Scope [pdf] Instruction Manual MT1010 Mini Oscillo Scope, MT1010, Mini Oscillo Scope, Oscillo Scope, Scope</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.