




MAKEiD E1 Label Printer User Manual

[Home](#) » [MAKEiD](#) » MAKEiD E1 Label Printer User Manual 

MakeiD

E1 Label Printer
User Manual

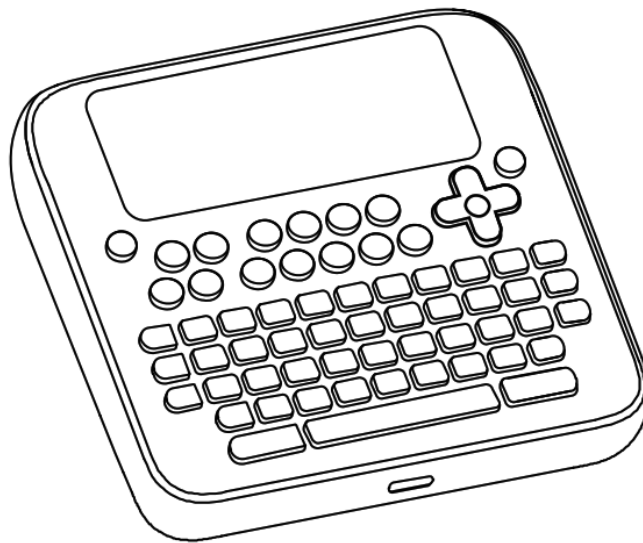

Contents

- [1 E1 Label Printer](#)
- [2 Main Components](#)
- [3 Create Labels](#)
- [4 Designment](#)
- [5 Printing](#)
- [6 Troubleshooting](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

E1 Label Printer

Foreword: Create labels for a variety of uses straight away by using MakeID label printers. By choosing different border designs, fonts, sizes, stickers and more, you can design beautiful custom labels.

Please read this manual thoroughly before use and keep it with care for future reference.

Rights: MakeID is the owner of this manual. To share, translate or modify the contents without the permission of MakeID is prohibited.

Trademark: The trademark of MakeID has been registered in the U.S, Europe and elsewhere, and all other trademarks are the properties of their respective owners.

Cautions:

1. Do not use the printer for any use and purpose other than the function described in this manual, as that may lead to accidents or damage to the printer;
2. Only official MakeID labels can be used on this printer, please do not use other branded labels;
3. Do not touch the print head with fingers. If the print head is dirty, please wipe it gently with alcohol-based cleaning wipes; in the label
4. Do not place any foreign exit as this may damage the
5. Do not place the printer in direct sunlight or rain, near heaters or other heat-generating devices, dashboards, the rear of cars, and in any area exposed to extremely high or low temperatures, high humidity or dust. Standard operating temperature range is 5C-35C;
6. Do not stick the label onto any place where your hands often touch. Sweat and friction make the printing fade;
7. Do not expose the label paper to chemically based liquids, such as liquid soap, laundry detergent, liquid or alcohol etc, for long periods of time, it will shorten the life of the label paper;
8. Do not wipe the label with alcohol-based cleaning items;
9. Thermal inkless printing is a special printing technology. If it is wrongly used, the printing color will fade. Label papers should be used at room temperature, stuck in dry and smooth places that are not often touched.


Box Contains (subject to the actuality)

1 printer

1 cable

1 user manual (including Warranty Card and Quality Certificate)

Main Components

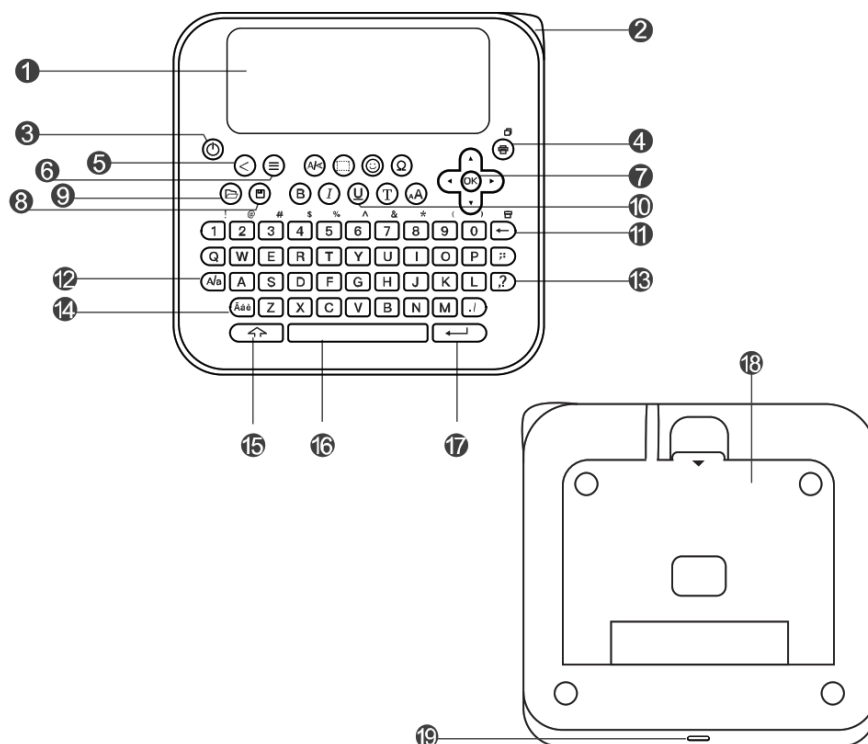

1. Display Screen 2. Cutter 3. Power On/Off 4. Print/ Batch Print 5. Return 6. Menu 7. OK 8. Save 9. Read 10. Fonts/Sizes/Decorations Modification	11. Delete/Empty 12. Upper/Lowercase Letter 13. Digits/Letters/Punctuations 14. Accent Letters 15. Shift 16. Blank 17. Line Feed 18. Label Storage 19. Charging Port
---	--

Usage


#Preparation

Label Installation


This printer can only print continuous labels. Please ensure that you use official MakeID labels, otherwise, the printer may be damaged or abnormal printing occurs.

Continuous labels


Label length unlimited

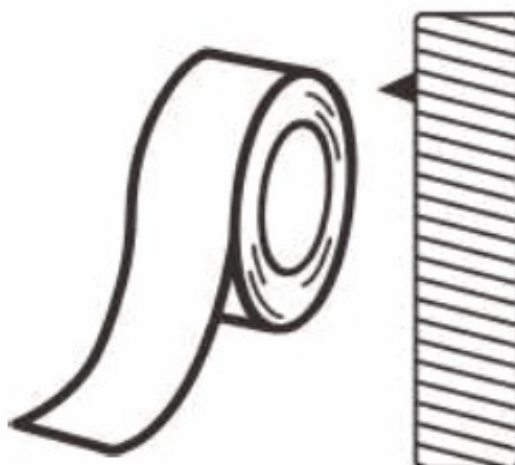

1. Open the label storage Cover on the back.

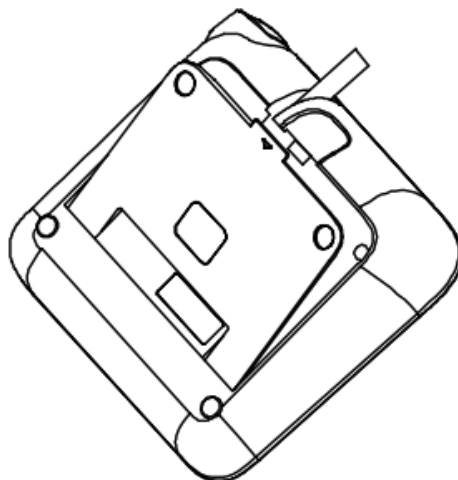


2. Put the label roll into the storage, and make sure it is put as the same as shown in the figure. Pull out some labels to avoid printing problems.

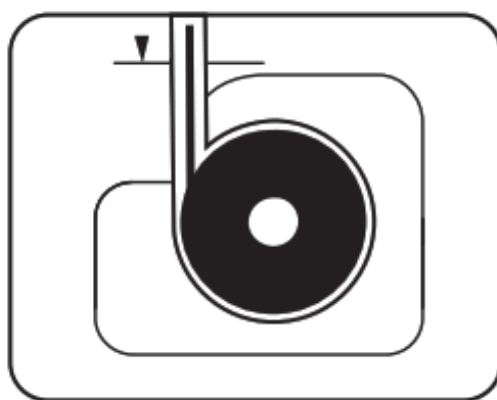


'When using a new roll of label for the first time, pull all transparent part of the leading label out of the exit.

Pull it out of the label exit

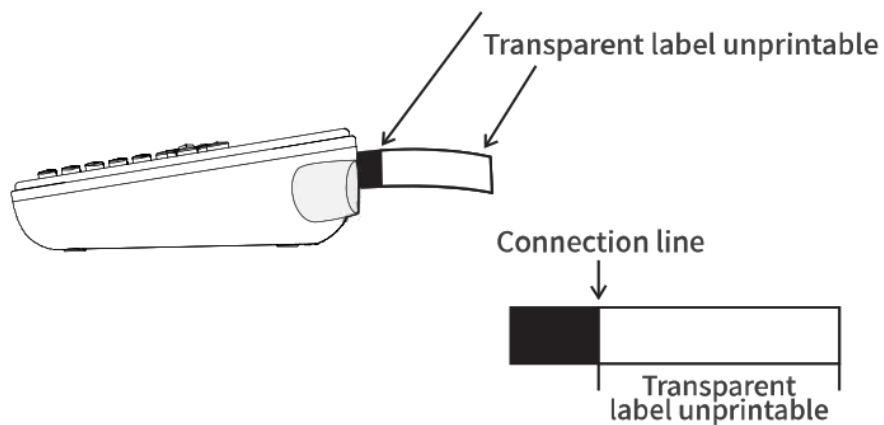


3. Shut the storage cover after the label roll is put in the storage, then press the Cutter to cut off the label.

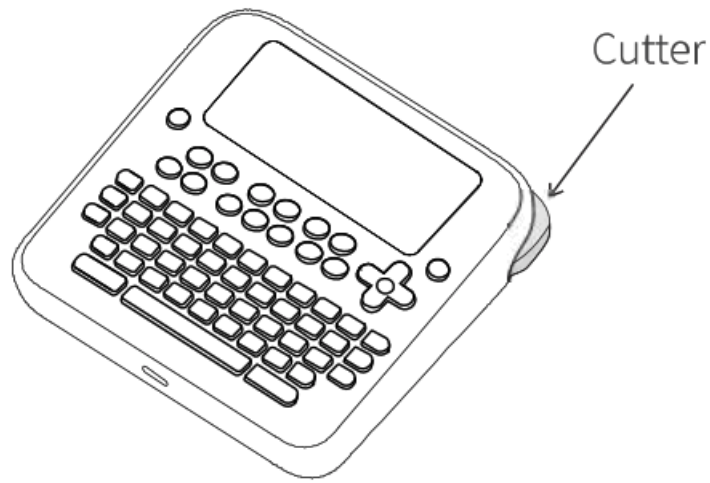

Power On

1. The printer is powered by lithium battery. 2For initial use, please select the printer When the power is sufficient, long press the language.
2. Power On/Off button for 2s to light up the screen to power on the printer.
3. When the printer is powered on, long press the Power On/Off button for 2s for powering off. The printer automatically powers off after 30min if without any operation.

Screen Info.

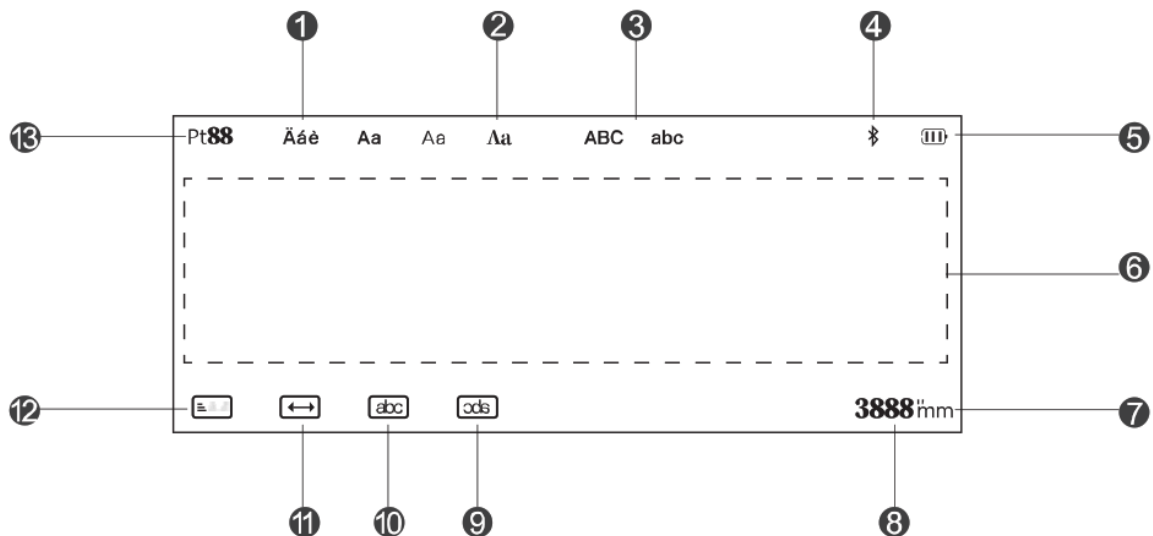

1. Accent letters
2. Fonts
3. Upper/Lowercase letter
4. Bluetooth
5. Remaining battery
6. Text editing/display area

7. Unit
8. Label length
9. Condensed
10. Label fixed length
11. Left-aligned/Centered/Right-aligned
12. Font size


Create Labels

You can print directly from the keyboard or connect to your mobile phone via Bluetooth to download the app to print.




#Print from the keyboard

Typing

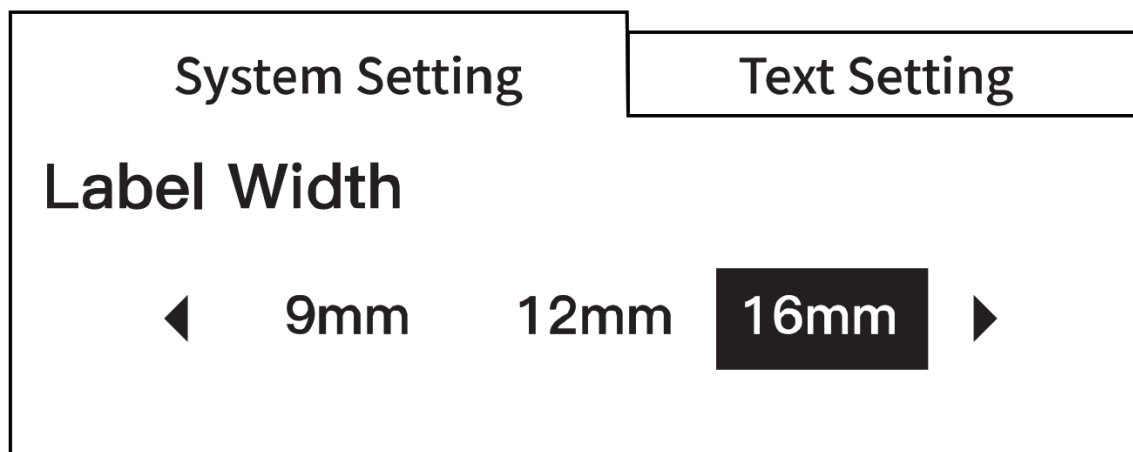




1. Confirm the label width, and select your corresponding width.





Abnormal printing may occur if a wrong width is selected.

2. Type the text you want to print.
3. Click "**A/a**" to switch upper/lowercase letters.
4. Click "**Aae**" or long press the corresponding letter to switch accent marks.
5. Long press " " while long press another button with shift function to realize the shift function of typing and operation.
6. Click " " to move down one line.
7. Click " " to delete the text.

Designment

1. Click "**BIU**" to bold, slant and/or underline the text.
2. Click "**T**" to select fonts. 3 different fonts are available for this printer.
3. Click " " to select sizes. 5 different sizes are available for this printer.
4. Click " " to switch horizontal or vertical layout.
5. Click " " to add borders.
6. Click " " to add stickers.
7. Click " " to add symbols.

Printing

1. Click " " to print the label.
2. Click " " to enter batch print setting. (9 copies maximum for batch printing)
3. After finishing printing, press the Cutter on the right top of the printer to cut off the label.
4. To prevent damage to the label or the printer, do not attempt to cut off the label while it is printing,

#Connect to your mobile phone via Bluetooth

Scan the QR code to download the app directly, or go to "Search MakeID-Life" to download.




MakeID-Life

APP Download

<https://www.jingjingfun.com/app-international/>

Connect to the printer

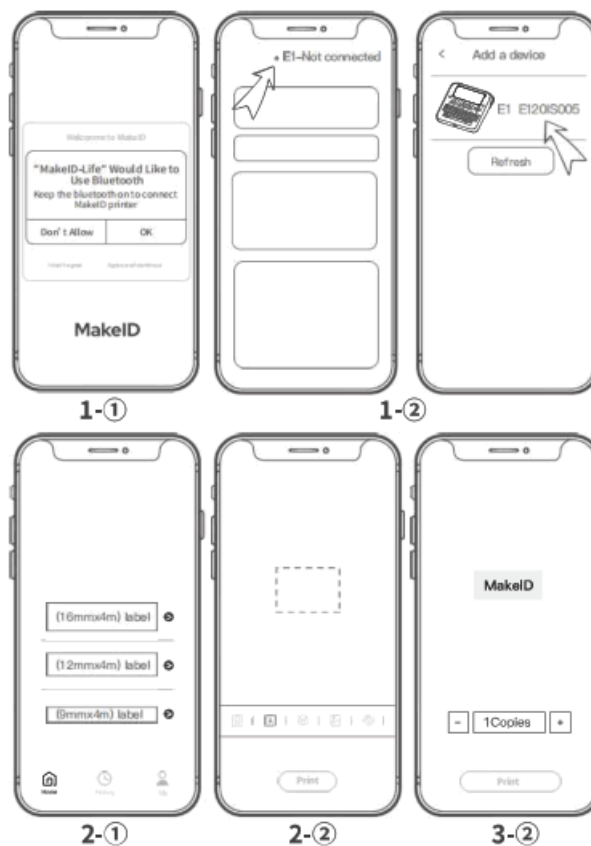

1. Open the app and grant all permissions requested by the phone. Granting permissions is only for searching and connecting to your printer. It will not violate any privacy.
2. Search for the printer and connect. please connect in the app. Do not connect to the Bluetooth in the phone system setting.

Typing & Designment

1. Confirm the label width, and select your corresponding width in the app. Abnormal printing may occur if a wrong width is selected.
2. Enter into the page as shown in the figure of creating your new label. Click " " to edit the text, and click " " to select fonts and sizes.
3. Click " " to insert stickers and icons, etc.


Printing

1. Click “Print” button to enter the print preview page.
2. You may batch print the label at the print preview page. (70 copies maximum for batch printing)
3. After finishing printing, press the Cutter on the right top of the printer to cut off the label.
4. To prevent damage to the label or the printer, do not attempt to cut off the label while it is printing.

Stickup

The bottom side of the label comes with an easy-peel opening. Peel off the sticker from the back of the label before use.

Peel from the back

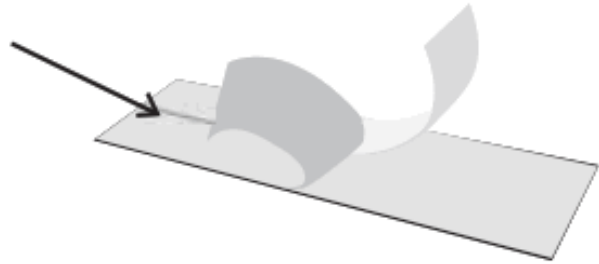


Charging

The printer is powered by a lithium battery and uses a Type-C input with 5V—2A for charging; Please charge by using the Type-C cable that comes with the printer and a standard Type-C charging head; Please charge the printer at intervals of 3 months for long periods of non-use, so that the lithium battery does not wear out naturally over time and cannot be charged; When the screen displays as shown in the figure, it indicates the printer is charging



When the icon “” becomes “”, it indicates the printer has fully charged.

Troubleshooting

Problems	Causes and solutions
Printer unable to power on or it powers off when using	Printer unable to power on or it powers off when using
No print or incomplete printing	Check that the label roll is correctly installed. Please refer to Label In The labels may have run out, please restart the printer securely shut.
Blurred printing	Check if the printer is used under low temperature. standard operating temperatures.
Printer powers off when printing	The battery may be dying. Please recharge.
Unable to download 'MakeID-Life' app	<p>Scan the QR code or go to Google play or App Store to search for "MakeID-Life"</p>  <p>APP Download</p> <p>https://www.jingjingfun.com/app-international/</p> <p>download the app. Check if the network condition of the phone is working.</p>
Phone unable to connect to the printer	Check if "MakeID-Life" app is successfully downloaded. Check if phone connects to the Bluetooth in the phone system setting.

Please contact us at jryx@jingjingfun.com for further assistance,

MakeID Provides a Three-Year Warranty

The product is covered by a three-year warranty period from the date of purchase. During the warranty period, MakeID shall repair your product free of charge due to quality and functionality problems.

1. To repair or replace your product within the warranty period, you must provide the order number, contact info, and shipping details, which should include your name, phone number and full address.
2. Product returned to MakeID must be in full packaging. MakeID will not hold any responsibilities for the product lost or damaged by customers during shipping.
3. The product must be used strictly in accordance with the user manual provided. MakeID shall not be liable for any problems caused by accident, misuse, modification or negligence.
4. Make ID label printers are exclusively designed for the use of MAKEID label paper. This warranty does not cover any failure or damage caused by the use of any third-party label papers.
5. This warranty does not affect your legal rights as a consumer.

Under the environment with Electrostatic Discharge Test Results the sample may be disconnected, but it can be resumed to normal operation by user after test.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this

equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

MakeID


Chongqing Jingranyouxu Technology Co., Ltd.

Web: WWW.MakeID.COM



FF010000E1SMS0000000000

Documents / Resources

	<p>MAKEiD E1 Label Printer [pdf] User Manual E1, 2AUMQ-E1, 2AUMQE1, E1 Label Printer, Label Printer, Printer</p>
--	--