




MAVINEX M05 12-in-1 USB-C Hub User Manual

[Home](#) » [MAVINEX](#) » **MAVINEX M05 12-in-1 USB-C Hub User Manual** 

Contents

- 1 **MAVINEX M05 12-in-1 USB-C Hub**
- 2 **Specifications**
- 3 **Product Care & Use**
- 4 **Documents / Resources**
 - 4.1 **References**
- 5 **Related Posts**

MAVINEX

MAVINEX M05 12-in-1 USB-C Hub



Thank you for purchasing the MAVINEX M05 12-in-1 USB-C Hub. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.


Package Contents

- 12-in-1 USB-C Hub
- User Manual
- Warranty Card

Product Diagram

Gigabit Ethernet Port

Gigabit Ethernet Port

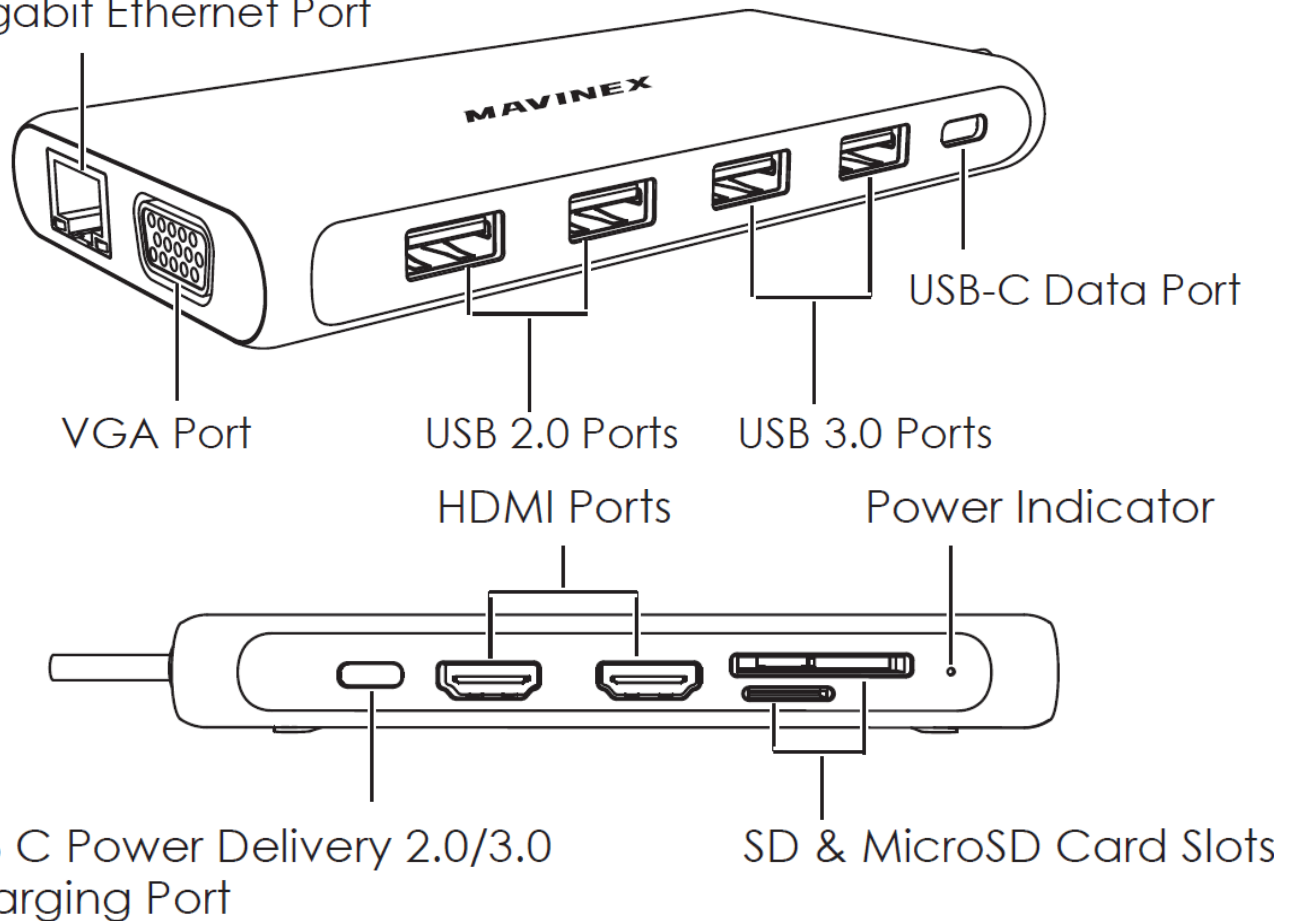

Specifications

Model	M05
Interfaces	2 USB 3.0 ports 2 USB 2.0 ports USB-C data port USB C Power Delivery 2.0/3.0 Charging port 2 HDMI ports VGA port Gigabit Ethernet port SD & MicroSD card slots
Connector	USB-C
USB Power Delivery Input	DC 20V 5A (up to 100W)
USB 3.0 Data Transfer Speed	Up to 5Gbps
USB 2.0 Data Transfer Speed	Up to 480Mbps
HDMI Display Resolution	Up to 4K@30Hz
VGA Display Resolution	Up to 1080p@60Hz
Supported Network Speeds	10/100/1000Mbps
Material	Aluminum alloy
Cable Length	200mm / 7.87"
Dimensions	127 x 62 x 17mm / 5" x 2.45" x 0.65"
Weight	123g / 4.34oz

Getting Started

1. Plug the hub into a laptop USB-C port. The power indicator will light up white
2. Connect the hub to a wall outlet with the USB-C power adapter and USB-C to C cable that came with your laptop
3. Connect your memory cards, USB devices (like mouse, keyboard, flash drive), HDMI displays, VGA display, and Ethernet cable to the hub

Product Care & Use

- Connect this hub to your host device first before connecting other devices to the hub
- Use your laptop's original power adapter to charge your laptop via the USB C Power Delivery 2.0/3.0 Charging Port on this hub
- When connecting an external hard drive or multiple devices to this hub, connect your laptop's power adapter to

the USB C Power Delivery 2.0/3.0 Charging Port first because your host device may not deliver the required power

- Only one external hard drive can be connected to this hub
- When the power adapter is connected or disconnected, the connected USB devices will be disconnected for a few seconds. To prevent data corruption or loss, avoid connecting or disconnecting your power adapter while transferring data
- The maximum current output of each USB 3.0 data port is 900mA, and of each USB 2.0 data port is 500mAh. These ports are not recommended for charging due to lower output
- USB 3.0 ports may interfere with 2.4GHz wireless devices (like wireless mice and keyboards)
- Keep away from liquids and extreme heat


Warranty & Customer Support

For questions, support, or warranty claims, contact us at the address below that corresponds with your region. Please include your Amazon order number and product model number.

Amazon US orders: support@mavinex.net

- Please note, MAVINEX can only provide after sales service for products purchased directly from MAVINEX. If you have purchased from a different seller, please contact them directly for service or warranty issues.

Documents / Resources

	<p>MAVINEX M05 12-in-1 USB-C Hub [pdf] User Manual M05 12-in-1 USB-C Hub, M05, 12-in-1 USB-C Hub</p>
---	--

References

-  [MAVINEX](#)