



MAXDORIA B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone User Manual

[Home](#) » [MAXDORIA](#) » MAXDORIA B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone User Manual 

MAXDORIA

Wireless Microphone User Manual

Contents

- [1 B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone](#)
- [2 Introduction](#)
- [3 ID Diagram](#)
- [4 How to use Lightning/Type-C receiver](#)
- [5 How to use 3.5mm receiver](#)
- [6 About UI](#)
- [7 Packing list](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone




3-in-1 multi-function receiver
Live Streaming | Video Recording | Interview | Vlog

Introduction


Thanks for choosing our product.

This product is a smart wireless microphone that provides professional grade recording output. Plug and play, no app required. It can be used in different scenes such as Live Streaming, Video Recording, Online Teaching and others.

The wireless microphone consists of three components: two microphone transmitters and a 3-in-1 multi-function receiver. (see as below pictures)

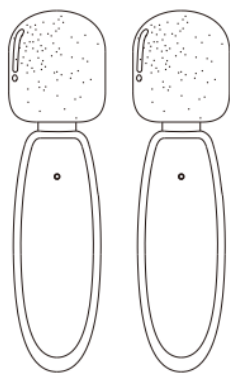


(Microphone Transmitters)

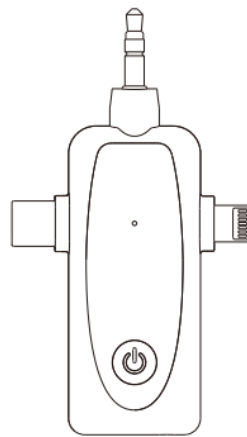

(3-in-1 Multi-function Receiver)

ID Diagram

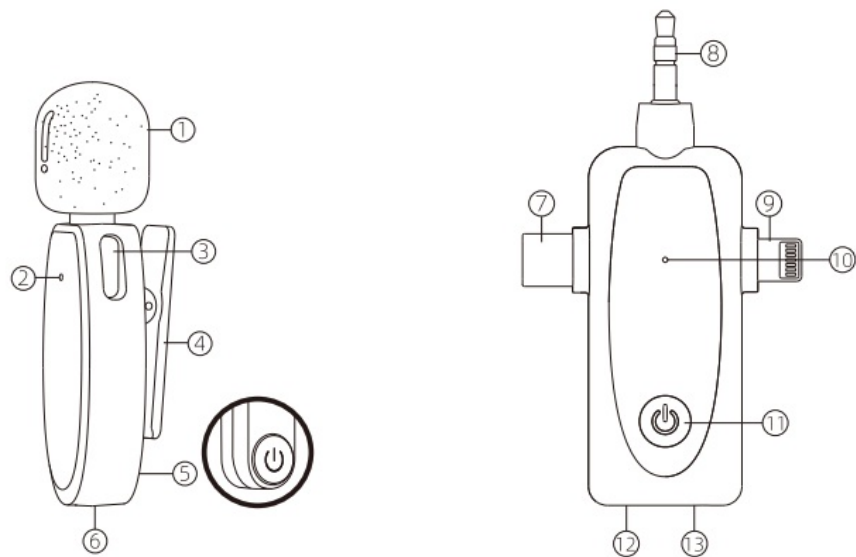


- 1 windproof sponge
- 2 indicator light of microphone
- 3 Type-c charging port of microphone
- 4 Microphone clip
- 5 Power button of microphone
- 6 Reset key of microphone
- 7 Type-C receiver

- 8 3.5 mm receiver
- 9 Lightning receiver
- 10 indicator light of receiver
- 11 Power button of receiver
- 12 Type-C charging port of receiver
- 13 3.5mm audio transfer interface


The function of above will be specifically explained later.

How to use Lightning/Type-C receiver


First: Plug the Lightning or Type-C receiver into the Lightning or Type-C port of mobile phone, the green light of receiver flashes quickly.

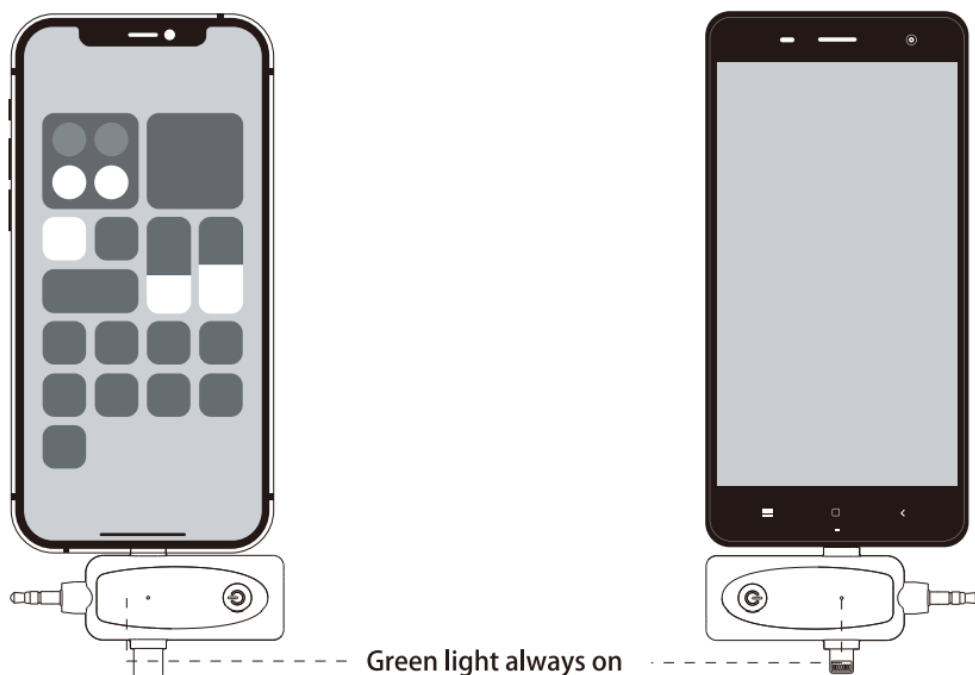

Second: Single press the power button of mic, it is turned on successfully when green light is on.

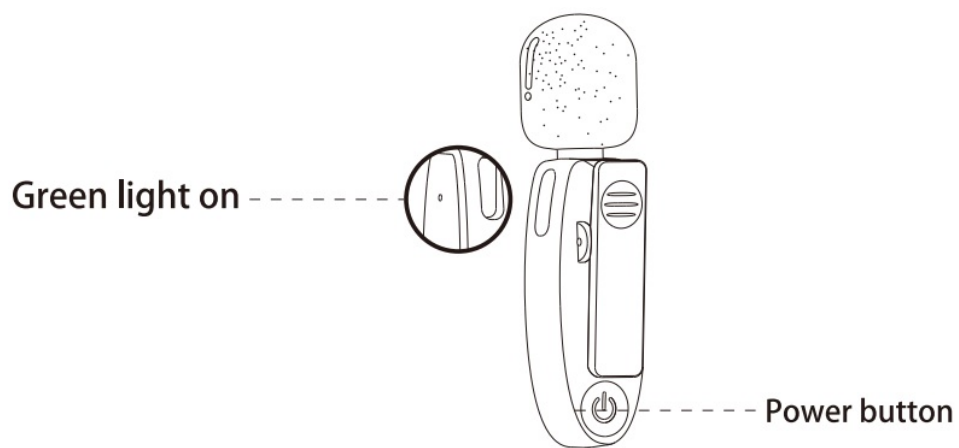


Last: Green light of receiver always stays on, and then the microphone works when opening phone camera to make a video recording or opening live streaming Apps to make a Live show.

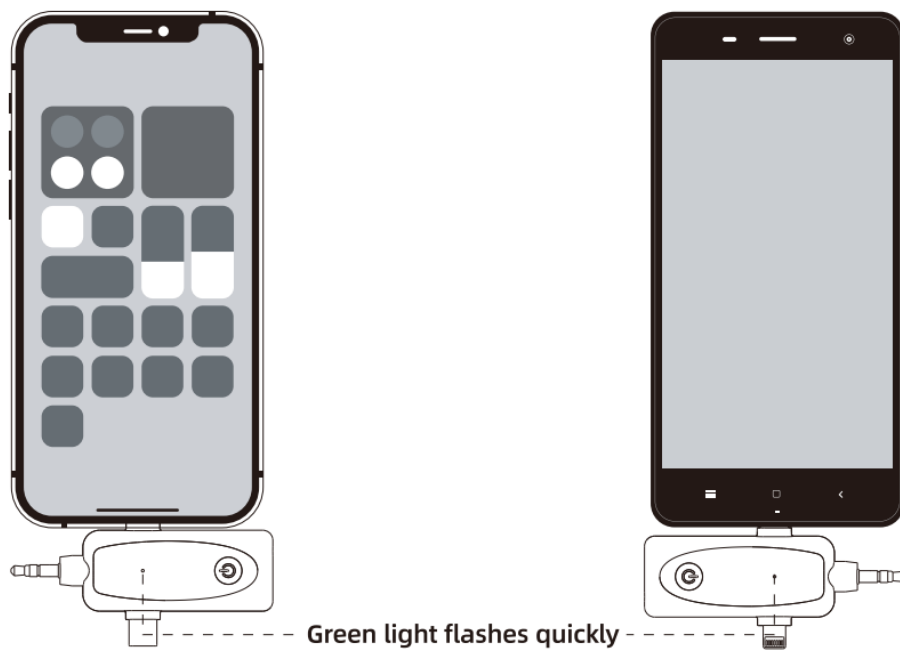


Special Notes:

For the number @, if the mobile phone is in low battery during live streaming, the external power supply directly charges the mobile phone through the Type-C port of the receiver.

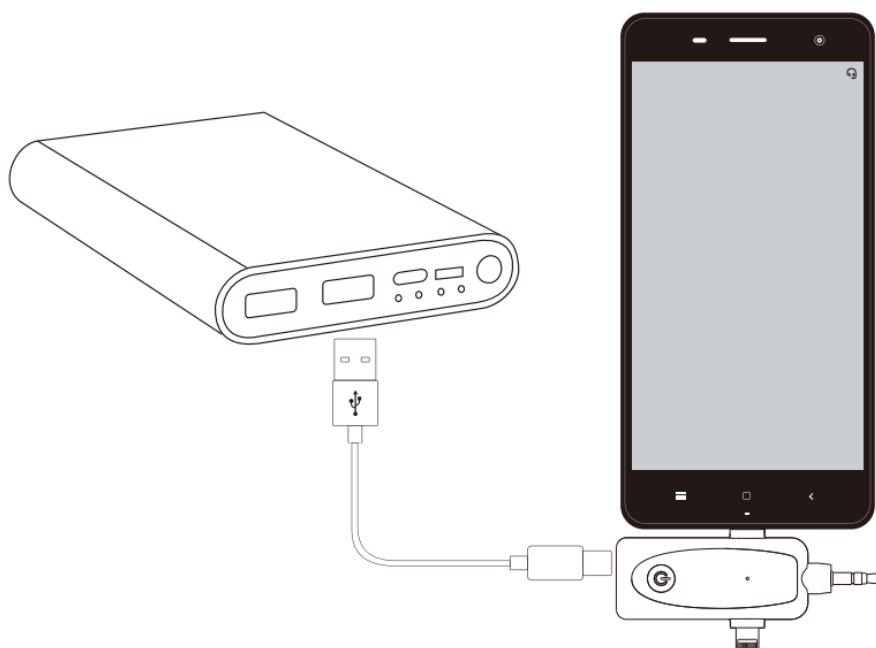


How to use 3.5mm receiver

Step 1: Insert the 3.5mm receiver into the corresponding port of the device, then press the power button on the receiver. Once done, the green light will start flashing.

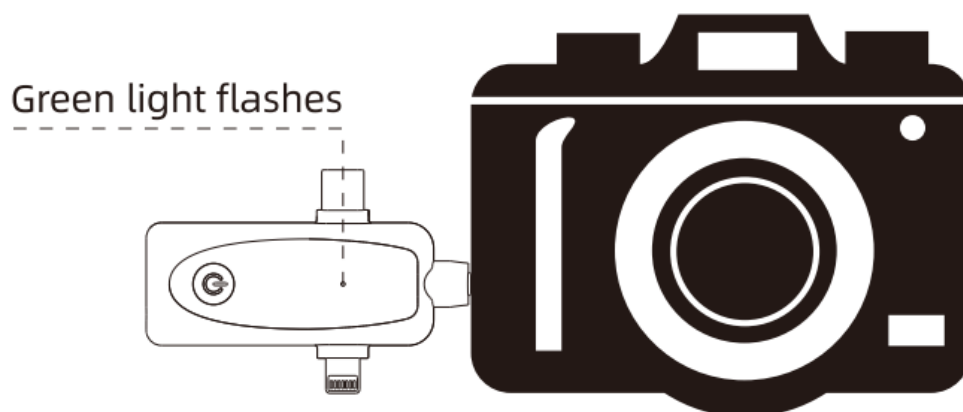

Step 2: Press the power button of the microphone to turn it on, and the green light will start flash. Then the microphone will automatically pair with the receiver, and the green light will stay on to indicate a successful pairing.

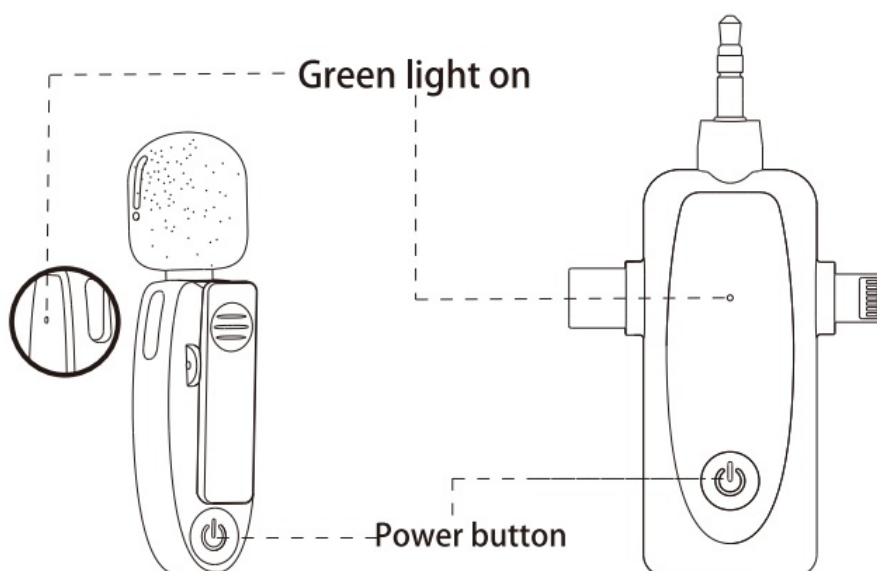

Step 3: Turn on the device, the microphone will work directly.

About UI

Microphone Transmitter

Functions	Operations	Light
Power on	Single press the power button	Green light flashes
Power off	Press the power button for 3-4s / auto power off with no connection for more than 10 mins	Green light flashed
Charging	Type-C cable charging	Red light on when charging, and light off once fully-charged
Search for pairing	/	Green light flashes slowly
Paired	/	Green light always on
Low battery alarm	Battery < 20%	Blue light flashes slowly
Stop	Single press	Blue light always on
Clear pairing	Press reset key quickly twice	Green light flashes quickly

Lightning Receiver

Functions	Operations	Light/Prompt tone
Power on	Plug into the device	Green light flashes
Power off	Plug off the device	Light off
Searching for pairing	/	Green light flashes slowly
Paired	/	Green light on
Clear pairing	Four- press the power button quickly within loss after power on	Green light flashes quickly
Monitor volume up and down, loop control	Double press the power button	One “beep”: minimum volume Two “beep”: medium volume Three “beep”: maximum volume
Noise reduction switch	Press power button once	Turn off noise reduction: Red light on Turn on noise reduction : Green light on

Type-C Receiver

Functions	Operations	Light/Prompt tone
Power on	Plug into the device	Green light flashes
Power off	Plug off the device	Light off
Searching for pairing	/	Green light flashes slowly
Paired	/	Green light on
Clear pairing	Four- press the power button quickly within 10s after power on	Green light flashes quickly
Monitor volume up and down, loop control	Double press the power button	One “beep”: minimum volume Two “beep”: medium volume Three “beep”: maximum volume
Noise reduction switch	Press power button once	Turn off noise reduction: Red light on Turn on noise reduction : Green light on

3.5mm Receiver

Functions	Operations	Light/Prompt tone
Power on	Plug into the device	Green light flashes
Power off	Plug off the device	Light off
Searching for pairing	/	Green light flashes slowly
Paired	/	Green light on
Low battery	The battery is in low power	Red light flashes
Clear pairing	Four- press the power button quickly within 10s after power on	Green light flashes quickly
Monitor volume up and down, loop control	Double press the power button	One “beep”: minimum volume Two “beep”: medium volume Three “beep”: maximum volume
Noise reduction switch	Press power button once	Turn off noise reduction: Red light on Turn on noise reduction : Green light on

Note:

1. Clear the pairing /factory reset operation steps: with the mic in the power-on state, use a needle to quickly tap the side hole of the mic (TX) twice. when the green light flashes quickly, short press the button on the 3-in-1 receiver or turn on a phone in 10s and quickly press the power button three times, the green light will flash quickly After waiting for about 10s, the mic and receiver will automatically be successfully connected, and the green light will stay on, indicating a successful pairing Repeat these steps for both 2 mics and the 3-in-1 receiver
2. During recording or live streaming, you can listen to the video or recording through the single wired earphone. You can listen to the video or recording only after the receiver is unplugged from the device
3. The microphone can be used normally during the charging process. when in a connected state, the charging

indicator flashes alternately between red and orange

4. For certain models of Android phones, such as Opto, Vivo, and OnePlus, there maybe additional steps required to enable certain functions

Step 1: If your phone has toga (On-The-Go) function, you may need to manually turn it on. This can usually be done by going to Settings > Additional Settings> OTG, and toggling the switch to turn it on

Step 2: Some models of Android phones may require manual setup to enable certain features For example, to use an external microphone for recording audio, you may need to go to Settings > Sound & Vibration > Other settings >

Default Recorder >Use Peripheral Device


Packing list

- (1) Microphone transmitter (Dual-Channel Version with 2 pCs)
- (2) 3-in-1 multi-function receiver
- (3) Type-C charging cable (Dual-Channel Version with 2 pcs)
- (4) User manual
- (5) 3.5mm TRS TO TRRS patch cable
- (6) 3.5mm single wired earphone
- (7) Carrying bag

If you have any questions, please contact us through our Email: info@maxtop.asia



Documents / Resources

	MAXDORIA B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone [pdf] User Manual B1N-DUAILSL, B1N-DUAILSL 3 in 1 Wireless Lavalier Microphone, 3 in 1 Wireless Lavalier Microphone, Wireless Lavalier Microphone, Lavalier Microphone, Microphone
---	--

References

- [User Manual](#)