

Maxxima MEW-RST100W Single Pole Switch with Power Outlet Installation Guide

[Home](#) » [Maxxima](#) » Maxxima MEW-RST100W Single Pole Switch with Power Outlet Installation Guide 



Contents

- [1 MEW-RST100W Single Pole Switch with Power Outlet](#)
- [2 SPECIFICATION](#)
- [3 INSTALLATION INSTRUCTIONS](#)
- [4 1 YEAR WARRANTY](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

MEW-RST100W Single Pole Switch with Power Outlet



- Risk of electric shock – Disconnect power at the source before installation.
- If you are unsure about the installation or the maintenance of the wall light, please consult an electrician.
- Use only copper or copper-clad wire.



- To insure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code and applicable local codes or ordinances.

SPECIFICATION

- 15A 60Hz 120VAC – 1800W Max – Seperate Feed Wiring Capable
- Maximum Tightening Torque: 14 in-lbf (1.6 Nm)


INSTALLATION INSTRUCTIONS

Tools Needed: Screwdriver, wire nuts, electrical tape.

If you are replacing an existing fixture, remove and disconnect the old fixture first.


Note: For Separate Feed and/or Switched Outlet Configuration wiring, the break off fin located in between the dark-colored screws should be removed before wiring. Use a Flat Head screw driver to bend the fin until it breaks off.

1. Shut off power at the circuit breaker or fuse. See Warning.
2. Remove the insulation from wires (approximately 3/8" to 5/8"). The HOT terminals have dark-colored screws.
Loop each wire around its respective terminal screw per the diagram below.
3. Fasten Screws securely. Terminal screws accept up to #12AWG copper or copper clad wire
4. Mount the switch using the long mounting screws provided. Attach the wall plate.
5. Restore power at the circuit breaker or fuse. See Warning.

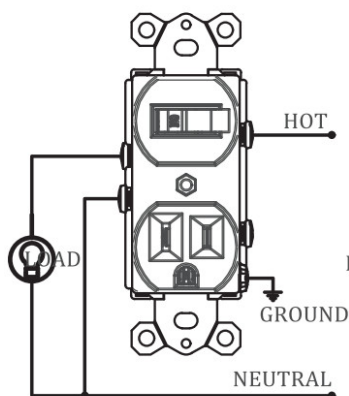


Common Feed:

Switch and power outlet wired to one HOT circuit.

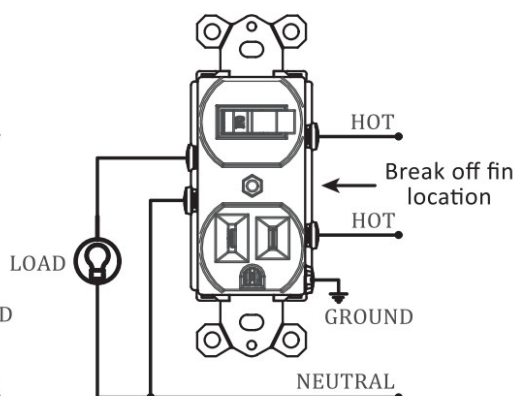

Seperate Feed:

Switch and power outlet on seperate circuits.
(Break off fin removed)

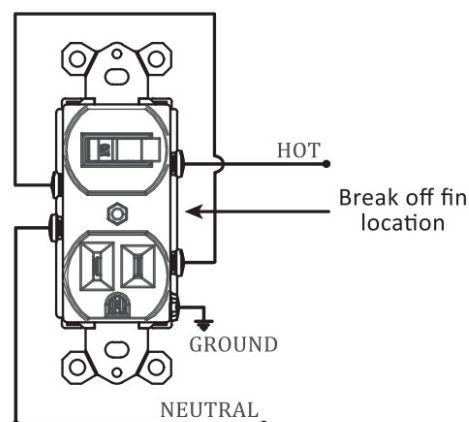

Switched Outlet :

Switch controls the ON/OFF function of the power outlet. (Break off fin removed)

1 YEAR WARRANTY

Maxxima extends a 1-year limited warranty to the original purchaser that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product with the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. A limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.



info@maxximastyle.com



866-MAXXIMA (629-9462)




www.maxximastyle.com



125 Cabot Court Hauppauge, NY 11788

Documents / Resources



[Maxxima MEW-RST100W Single Pole Switch with Power Outlet](#) [pdf] Installation Guide
MEW-RST100W Single Pole Switch with Power Outlet, MEW-RST100W, Single Pole Switch with Power Outlet, Single Pole Switch, Pole Switch, Switch

References

- 💡 [Factory Direct LED Recessed Lighting, Outdoor Wall Lights, Ceiling Fixtures and Electrical Products](#)

[Manuals+](#).