



MEAN WELL DBUF40-24 DIN Rail Type Buffer Module Owner’s Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL DBUF40-24 DIN Rail Type Buffer Module Owner’s Manual



D 40-24BUF
24V/40A DIN Rail Type Buffer Module





<p>User's Manual</p> 	<p>Video</p> 
<p>https://www.meanwell.com/Upload/PDF/DBUF%20DIN%20rail%20Buffer%20Module.pdf</p>	<p>https://www.youtube.com/watch?v=sdfgk23RKqM&list=PLvUyt_OJELVrHolIRgvHF2NQ-j39-NH-J&index=8</p>

Contents

- 1 Features
- 2 Applications
- 3 Description
- 4 SPECIFICATION
- 5 Block Diagram
- 6 Function Manual
- 7 Typical Application Notes
- 8 Mechanical Specification
- 9 Installation Instruction
- 10 Documents / Resources
 - 10.1 References

Features

- Buffering with electrolytic capacitors instead of lead acid batteries
- Type buffering time of 250ms @22Vdc/40A
- Buffer mode selectable by switch:
 - Fixed mode at 22Vdc
 - Dynamic mode for $V_{in}-1V_{dc}$
- LED indicator for signal status
- Supports parallel connection to extend buffering time
- Cooling by free air convection
- -25~+75 wide operating temperature°C
- 3 years warranty

Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

The DBUF40-24 buffer module is a supplementary device for regulated DC 24V power supplies. The buffer module utilizes maintenance-free electrolytic capacitors to store energy, thus eliminates the need of periodic replacement as compared to costlier batteries which also have shorter functional life span. The DBUF40-24 comes with comprehensive protection features like over voltage, over current and short circuit protections. Buffer modules can be connected in parallel to increase the output ampacity or the hold-up time.

Model Encoding

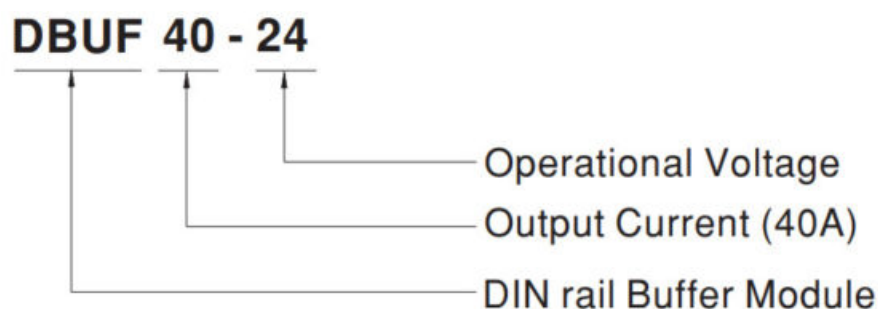

SPECIFICATION

MO DEL			DBUF40-24		
CHA RGI NG MO DE	DC NORMAL OPERATING VOLTAGE		24Vdc		
	CHARGING VOLTAGE		23~30Vdc		
	CHARGING CURRENT		900mA Max.		
	CURRENT CONSUMPTION AT STANDBY		100mA Max.		
	CHARGING TIME		25s Typ.		
			35s Max.		
BUF FER MO DE	DC NORMAL OPERATING VOLTAGE		22Vdc/Vin-1Vdc		
	DC OPERATING VOLTAGE RANGE		22-29Vdc		
	OUTPUT CURRENT(max.)		40A		
	BUFFER TIME (Refer to Buffering Curve at 22Vdc)	Output current	40A	20A	0.1A
		Typ.	250ms	500ms	62s
		Min.	160ms	320ms	42s
	RIPPLE & NOISE (max.) Note.2		350mVp-p		

PRO TEC TION	OVER VOLTAGE		31~37.5V only, shut down o/p voltage	
	OVER LOAD		105%~125% rated output power at buffer mode	
			Protection type: Shut down o/p voltage , re-power on to recover	
	SHORT CIRCUIT		Protection type: Shut down o/p voltage , re-power on to recover	
	TVS FOR SIGNALS (max.)		35V	
FUN CTI ON	SELECT ABLE B Y SWIT CH		Fix 22Vdc(Default)	Buffering starts if terminal voltage falls below 22Vdc
			Vin-1Vdc	Buffering starts if terminal voltage is decreased by > 1Vdc
	CONTR OL	Inhibit (I)	+Vs – V(I) < 6Vdc: Buffer module ON; +Vs – V(I) > 10Vdc: Buffer module OFF	
			35Vdc /4mA Max.	
	SIGNAL S	Ready(R)	Charged ready: V(R)>+Vs – 2Vdc; Unready: V(R)<1Vdc	
			35Vdc /10mA Max.	
		Buffering (B)	Buffering: V(B)>+Vs – 2Vdc; Other mode: V(B)<1Vdc	
			35Vdc /10mA Max.	
		Supply Voltage(+Vs)		10~35Vdc /10mA(Connected to +V or external voltage)
	LED STATUS DISPLAY		ON	Ready
			OFF	Discharged
			Fla shi ng	1H z Charging
			10 Hz	Buffering
	PARALLEL CONNECTION		Refer to Typical Application Notes(Page 6)	


ENVI RON MENT	WORKING TEMP.	-25~+75°C(Refer to"Derating Curve")
	WORKING HUMIDITY	5 ~ 95% RH non-condensing
	STORAGE TEMP.	-25~+80°C
	SHOCK TEST	IEC60068-2-27,30G (300m/S²) for a duration of 18ms,1 time per direction,2 times in total
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 75°C)
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting clip: Compliance to IEC60068-2-6
	OPERATING ALTITUDE Note.3	5000 meters /OVCII

SAFE TY & EMC (Note. 4)	SAFETY STANDARDS	IEC62368-1,UL62368-1 approved		
	WITHSTAND VOLTAGE	IP/OP-FG:2.2KVdc; Signals-FG:2.2KVdc		
	ISOLATION RESISTANCE	IP/OP-FG, Signals-FG: >100M Ohms / 500Vdc / 25°C/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032	Class B
		Radiated	BS EN/EN55032	Class B
		Voltage Flicker	—	—
		Harmonic Current	—	—
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 3, 8KV contact; criteria A
		Radiated	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A
		EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV ; criteria A
		Surge	BS EN/EN61000-4-5	Level 3, 1KV/Line-Line ;Level 3, 2KV/Line-Line-FG ;criteria A
		Conducted	BS EN/EN61000-4-6	Level 3, 10V ; criteria A
		Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m ; criteria A
OTHERS	MTBF	162.6K hrs min. MIL-HDBK-217F (25°C) ; 1420.2K hrs min. Telcordia TR/SR-332 (Bellcore) (25°C)		
		106.8K hrs min. MIL-HDBK-217F (40°C) ; 717.2K hrs min. Telcordia TR/SR-332 (Bellcore) (40°C)		
	DIMENSION	63*125.2*114.9mm (W*H*D)		
	PACKING	1.062Kg; 12pcs/12.8Kg/0.74CUFT		


NOTE

1. All parameters NOT specially mentioned are measured at normal input, rated load and 25°C of ambient temperature.
 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.
 3. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
 4. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)
- ※ Product Liability Disclaimer For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>


Block Diagram

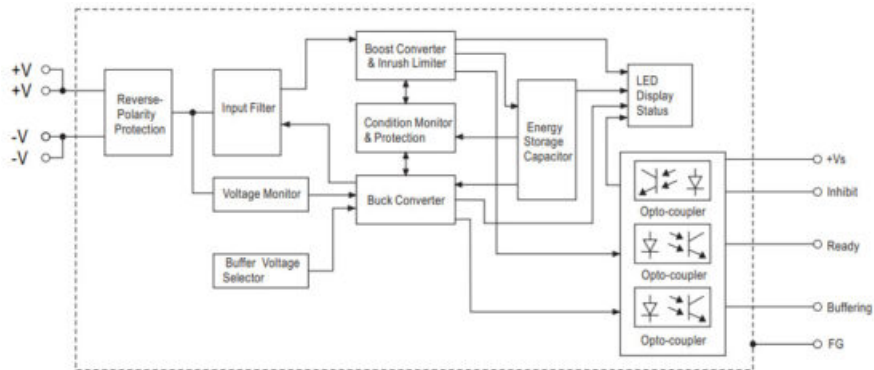

■ Derating Curve

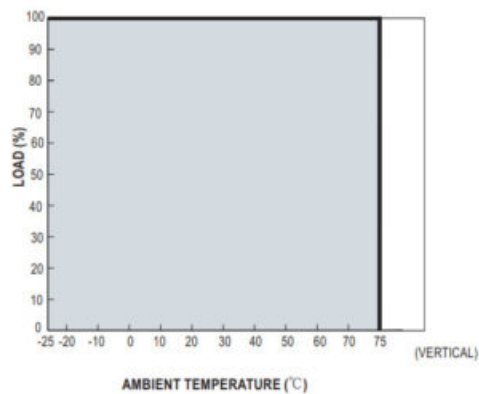


■ Buffering Curve

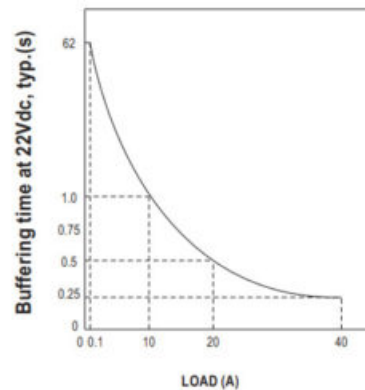

Function Manual

1. User Elements

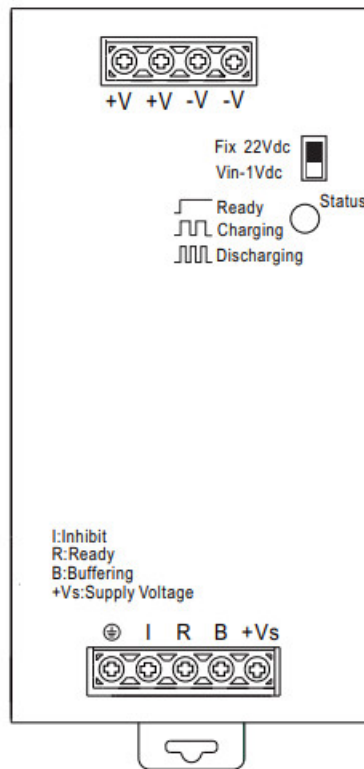

Back-up Threshold Voltage Selectable by Switch:

Option 1: Fixed mode (Switch in Fix 22Vdc)

The unit switches to buffer mode as soon as the voltage falls below 22Vdc. Option 2: Dynamic mode (Switch in Vin-1Vdc)

Unit switches to buffer mode when input voltage decreases by 1Vdc.

Note: Factory setting is fixed mode.

LED Indicator Status:

LED OFF: Capacitors are discharged.

LED ON: Capacitors are fully charged.

LED Flashing slowly (1Hz): Capacitors are getting charged.


LED Flashing quickly (10Hz): Capacitors are getting discharged.

Signal Connector:


-Inhibit, $+Vs - V(I) < 6Vdc$: Buffer module ON; $+Vs - V(I) > 10Vdc$: Buffer module OFF.

-Ready, Charged ready: $V(R) > +Vs - 2Vdc$; Unready: $V(R) < 1Vdc$. -Buffering, Buffering: $V(B) > +Vs - 2Vdc$; Other mode: $V(B) < 1Vdc$.

2. Operating Diagram

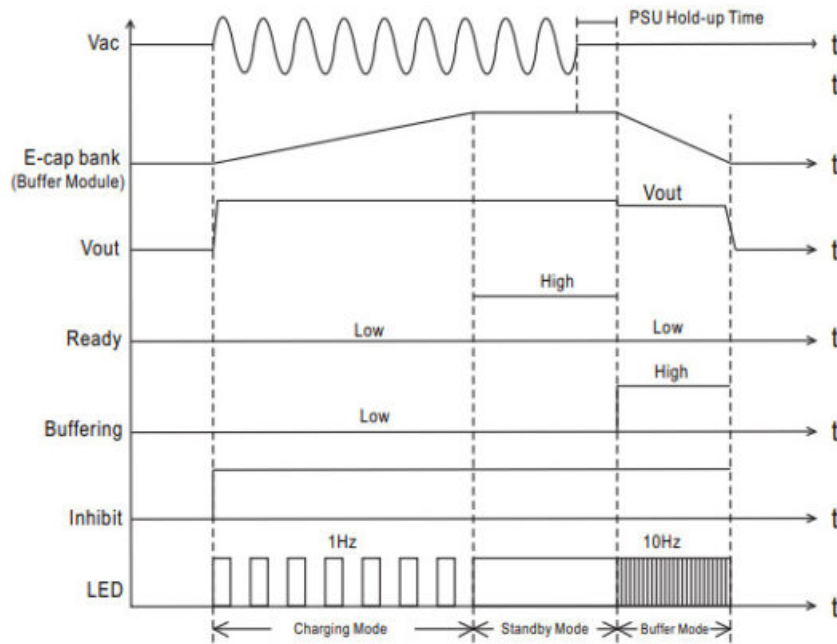

3. Signal Schematics

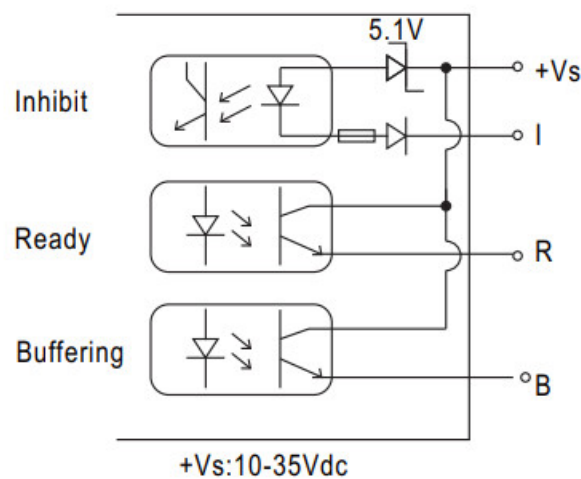


(+Vs can connected to DBUF40 “+V” or external voltage source, Please refer to “Typical Application Notes”)

Typical Application Notes

1. General wiring diagram

Terminal Pin No. Assignment (TB1)


Pin No.	Assignment
1,2	DC +V
3,4	DC -V

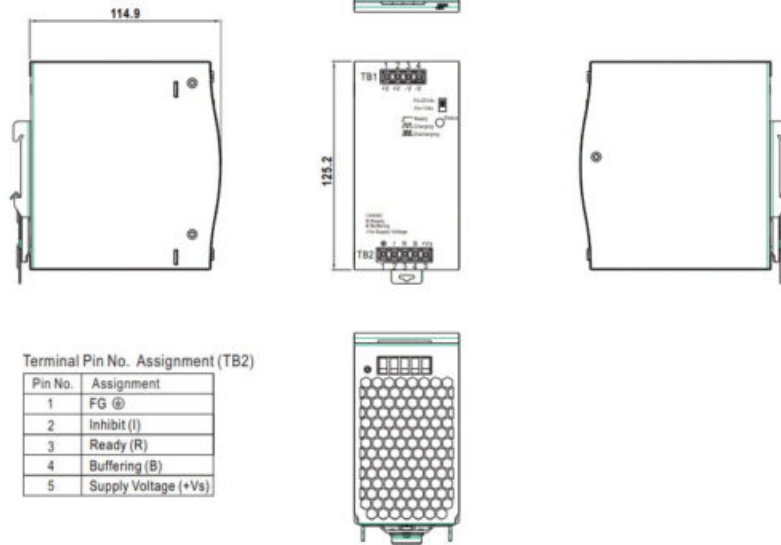

Terminal Pin No. Assignment (TB2)

Pin No.	Assignment
1	FG Ⓢ
2	Inhibit (I)
3	Ready (R)
4	Buffering (B)
5	Supply Voltage (+Vs)

Installation Instruction

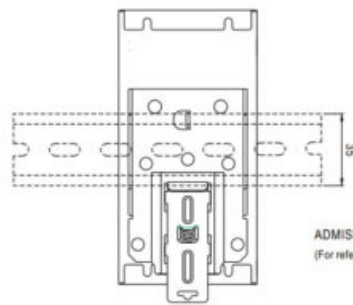

This series fits DIN rail TS35/7.5 or TS35/15.
For installation details, please refer to the Instruction manual.

ADMISIBLE DIN-RAIL-TS35/7.5 or TS35/15
(For reference only. Not included with unit.)

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>



Documents / Resources

	<p>MEAN WELL DBUF40-24 DIN Rail Type Buffer Module [pdf] Owner's Manual DBUF40-24 DIN Rail Type Buffer Module, DBUF40-24, DIN Rail Type Buffer Module, Type Buffer Module, Buffer Module</p>
--	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.