



## MEAN WELL DRDN20 20A DIN Rail Type Redundancy Module Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL DRDN20 20A DIN Rail Type Redundancy Module Owner's Manual 

### MEAN WELL DRDN20 20A DIN Rail Type Redundancy Module Owner's Manual



## Contents

- [1 Features](#)
- [2 Applications](#)
- [3 Description](#)
- [4 SPECIFICATION](#)
- [5 Block Diagram](#)
- [6 DC OK Relay Contact](#)
- [7 Mechanical Specification](#)
- [8 Installation Instruction](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)

## Features

- Support 1+1 and N+1 redundancy system
- 2 channels input and 1 output
- Suitable for redundancy operation of 12V/24V/48V system
- Output current up to 20A
- Cooling by free air convection
- -40~+80°C ultra-wide operating temperature (>+60°C derating)
- 32mm slim width
- Built-in 2 channels DC OK signal and alarm relay contact
- Installed on DIN Rail TS35/7.5 or 15
- 3 years warranty

## Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

## GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## Description

The DRDN20 series is a 20A redundancy module that can be used with a power supply to improve overall system operation reliability. Product key features include: 12V/24V/48V input voltage for selection, support N+1 and 1+1 redundancy systems, built-in two rails DC input contacts and single output. The MOSFET technology implemented can reduce heat loss and reduce the voltage difference between the input and output voltages, built-in 2 channels DC OK relay contacts for monitoring output status, ultra-wide operating temperature of -40 to +80°C and narrow width (32mm).

## Model Encoding

# DRDN20 - 24



Input voltage (12V/24V/48V)

Output current (20A)

DIN Rail Redundancy Module


## SPECIFICATION

MODEL		DRDN20-		
		=12V, 24V, 48V		
INPUT	NUMBER OF INPUT	2 Channels		
	DC NORMAL VOLTAGE	12Vdc	24Vdc	48Vdc
	DC VOLTAGE RANGE	9~14Vdc	19~29Vdc	36~60Vdc
	RATED CURRENT	0~20A per input      Continuous		
	VOLTAGE DROP (Vin-Vout) (max.)	0.25V		
	PEAK CURRENT	0~30A per input      5Sec.		
	EFFICIENCY (Typ.)	98%		
	INPUT REVERSE CURRENT (max.)	1mA		
	INPUT REVERSE VOLTAGE (max.)	40Vdc	40Vdc	65Vdc
OUTPUT	RATED CURRENT	0~20A, Continuous		
	PEAK CURRENT (max.)	30A, 5Sec.		
	CAPACITANCE(Typ.)	320uF		
	STANDBY POWER LOSSES(Typ.)	1.5W		
PROTECTION	OVERLOAD	<30A,5Sec. No damage		
	SHORT CIRCUIT	<30A,5Sec. No damage		
FUNCTION	REDUNDANCY	For 1+1 redundancy ,and support N+1 redundancy		
	BOTH INPUTS VOLTAGE ALARM	<8.5V or >14.7V (±5%)	<18V or >31V (±5%)	<34.2V or >63V (±5%)

TIO N	RELAY	30Vdc/1A resistive load		
	LED STATUS DISPLAY	Green LED OK		
E NVI RO NM ENT	COOLING	Free air convection		
	WORKING TEMP. Note. e.2	-40 ~ +80°C (Refer to “Derating Curve”)		
	WORKING HUMIDITY	5 ~ 95% RH non-condensing		
	STORAGE TEMP.	-40 ~ +85°C		
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)		
	VIBRATION	Component:10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC61373		
	OPERATING ALTITUDE Note. 3	5000 meters/OVC II		
SA FET Y & EM C(Note. 4)	SAFETY STANDARDS	IEC62368-1, UL62368-1, EAC TP TC 004 approved		
	WITHSTAND VOLTAGE	IP/OP – Chassis : 0.5KVac ; IP/OP- Relay : 0.5KVac ; Relay – Chassis : 0.5KVac		
	ISOLATION RESISTANCE	IP/OP – Chassis, IP/OP- Relay, Relay – Chassis:>100M Ohms / 500Vdc / 25°C/ 70 % RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032(CISPR32)	Class B
		Radiated	BS EN/EN55032(CISPR32)	Class B
		Voltage Flicker	—	—
		Harmonic Current	—	—
	EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2(BS EN/EN50082-2)		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 3, 8KV contact; criteria A
		Radiated	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A
		EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV ; criteria A

		Surge	BS EN/EN6 1000-4-5	Level 3, 1KV/Line-Line ;Level 3, 2KV /Line-Line-Chassis ;criteria A
		Conducted	BS EN/EN6 1000-4-6	Level 3, 10V ; criteria A
		Magnetic Field	BS EN/EN6 1000-4-8	Level 4, 30A/m ; criteria A
OTHERS	MTBF	1836.0K hrs min. Telcordia SR-332 (Bellcore) ; 482.1K hrs min. MIL-HDBK-2 17F (25°C)		
	DIMENSION	32*125.2*102mm (W*H*D)		
	PACKING	0.35Kg;28psc/10.8Kg/1.24CUFT		
NOTE	1. All parameters NOT specially mentioned are measured at normal input (12V/24V/48V), rated load and 25°C of ambient temperature.2. Derating may be needed over high ambient temperature. Please check the derating curve for more details.3. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).4. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to “EMI testing of component power supplies.”(as available on <a href="https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf</a> )※ Product Liability Disclaimer For detailed information, please refer to <a href="http://www.meanwell.com/serviceDisclaimer.aspx">http://www.meanwell.com/serviceDisclaimer.aspx</a>			


## Block Diagram

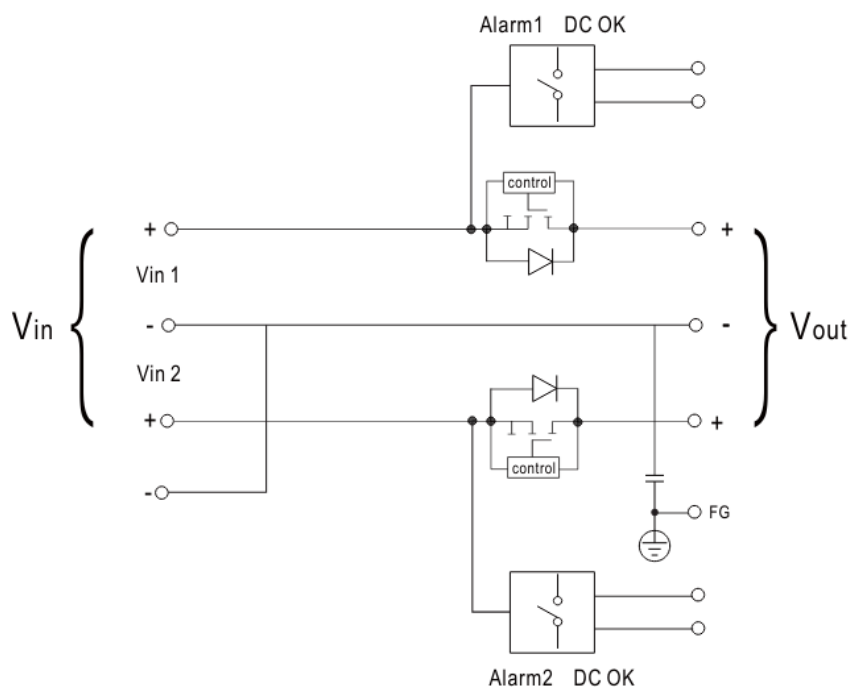


## DC OK Relay Contact

Contact Ratings (max.)	30V/1A resistive load
Contact Close(DC OK)	PSU turns on
Contact Open(DC Fail)	PSU turns off / over or under input voltage

## Derating Curve

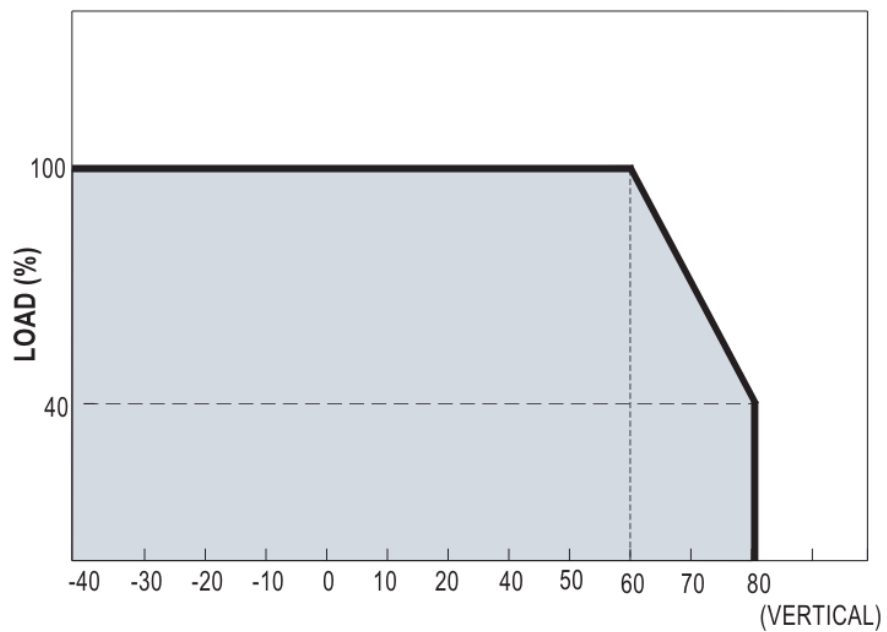


### Output Derating VS Input Voltage

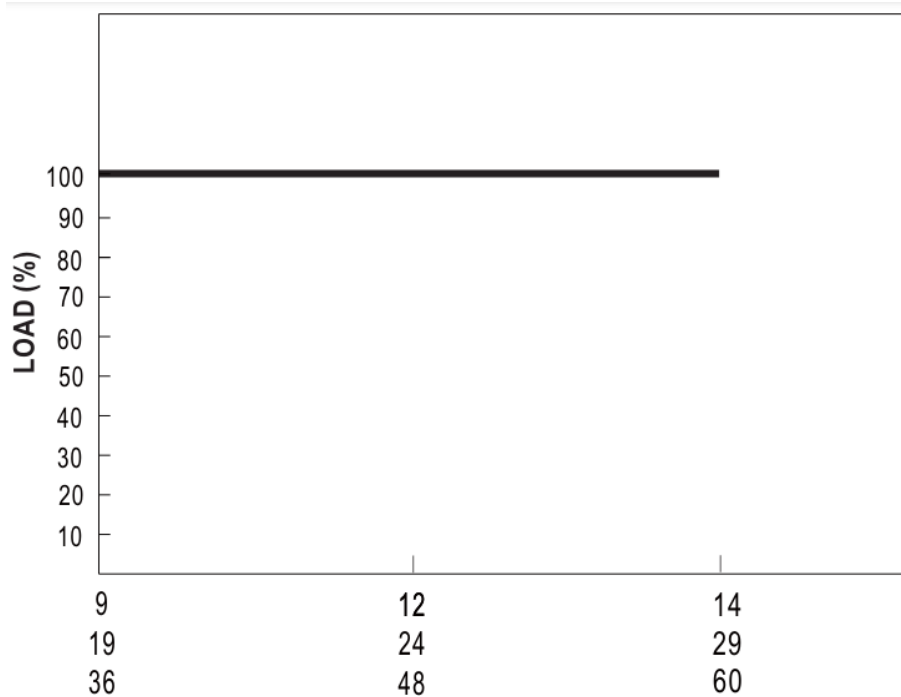

### Typical Application Notes


#### 1+1 Redundancy:

Using 1 more PSU as the redundant unit

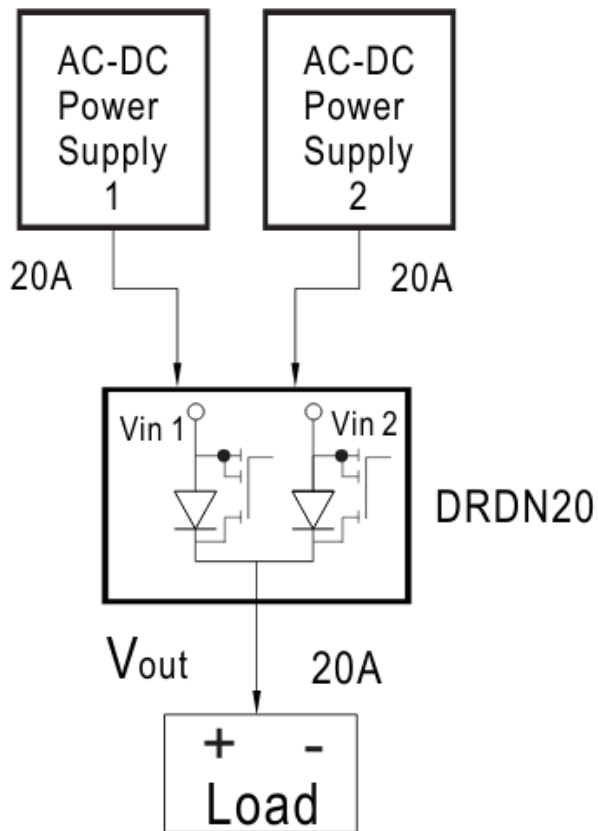


### 1+N Redundancy:

Using more PSUs as the redundant units to increase the reliability

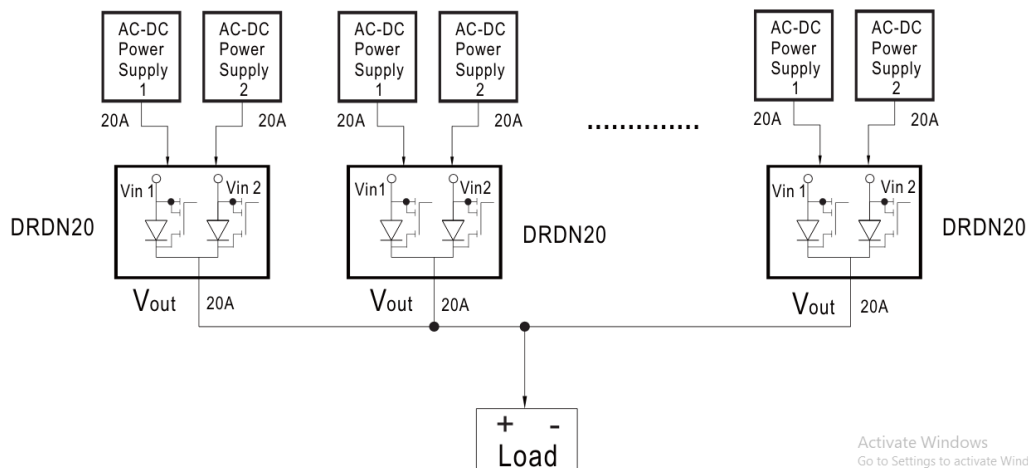


### Single Use:

Connecting only one PSU to one DRDN20 to reduce the stress of the and hence increase the reliability

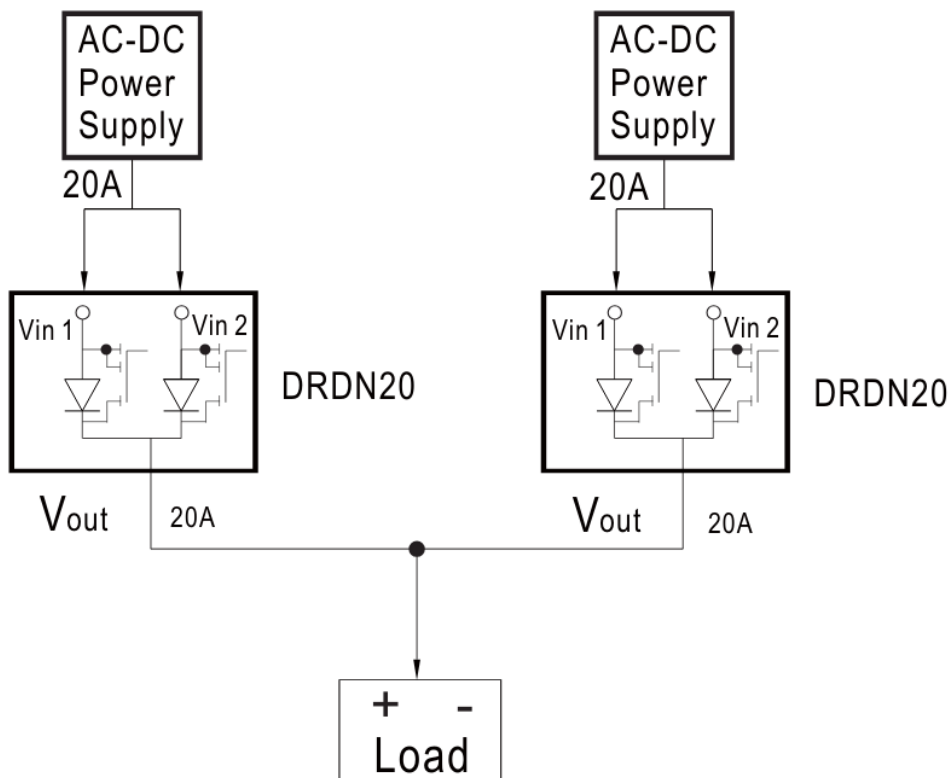


## Mechanical Specification


- Side View

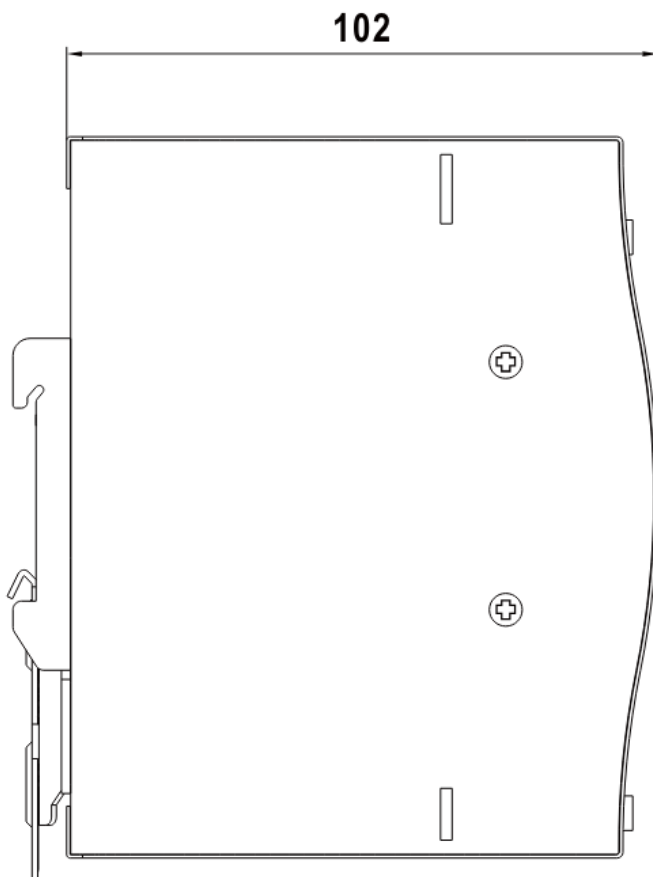


- Top View

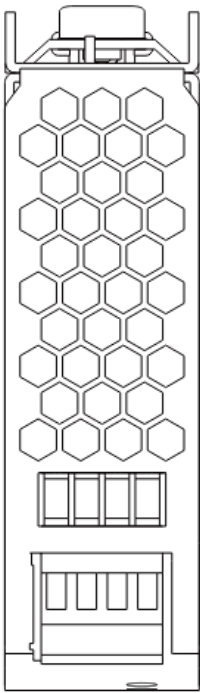


- **Front View**

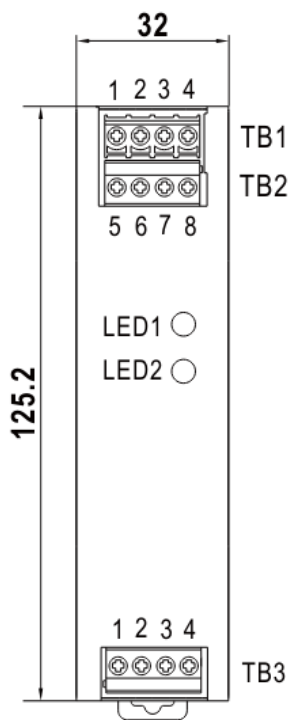

- **Side View**

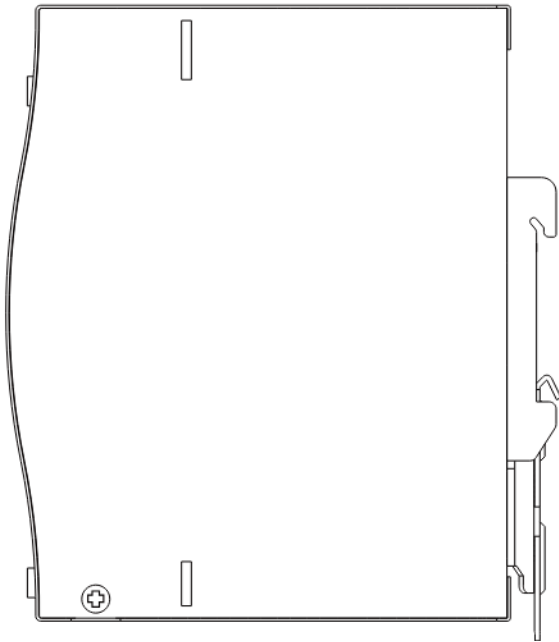


- **Bottom View**

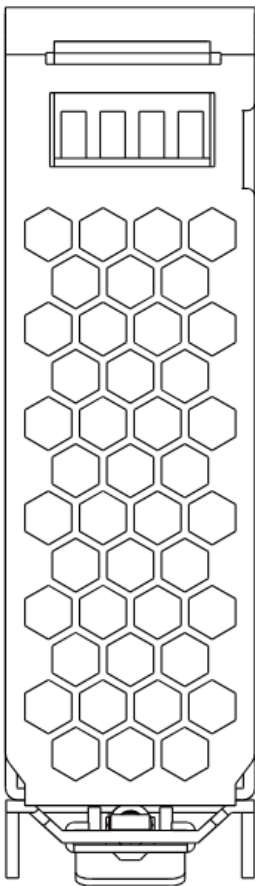

**Terminal Pin No. Assignment (TB3**

Pin No.	Assignment
1,2	Alarm1 DC OK
3,4	Alarm2 DC OK
5	FG
6,7	DC output +Vout
8	DC output -Vout

## Installation Instruction

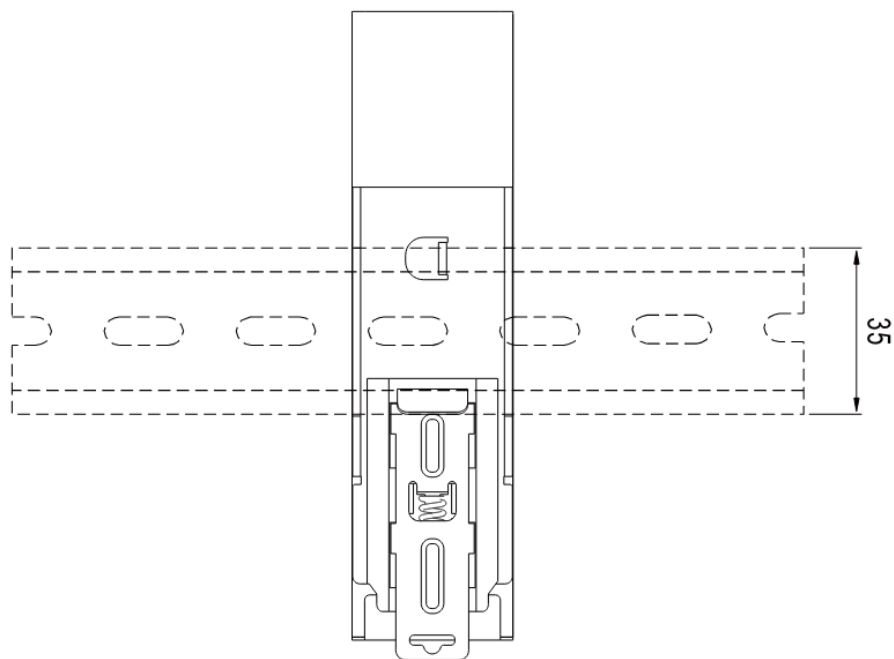

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

## Back View

This series fits DIN rail TS35/7.5 or TS35/15.  
For installation details, please refer to the Instruction manual


## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>





## Documents / Resources

	<p><a href="#">MEAN WELL DRDN20 20A DIN Rail Type Redundancy Module</a> [pdf] Owner's Manual DRDN20, DRDN20 20A DIN Rail Type Redundancy Module, 20A DIN Rail Type Redundancy Module, DIN Rail Type Redundancy Module, Type Redundancy Module, Redundancy Module, Module</p>
---	--

## References

- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.