



MEAN WELL EPS-120-12 120W Single Output Switching Power Supply Instructions


[Home](#) » [MEAN WELL](#) » MEAN WELL EPS-120-12 120W Single Output Switching Power Supply Instructions 

Contents

- [1 MEAN WELL EPS-120-12 120W Single Output Switching Power Supply](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Features](#)
- [5 Applications](#)
- [6 Description](#)
- [7 SPECIFICATION](#)
- [8 Diagrams](#)
- [9 Mechanical Specification](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



MEAN WELL EPS-120-12 120W Single Output Switching Power Supply

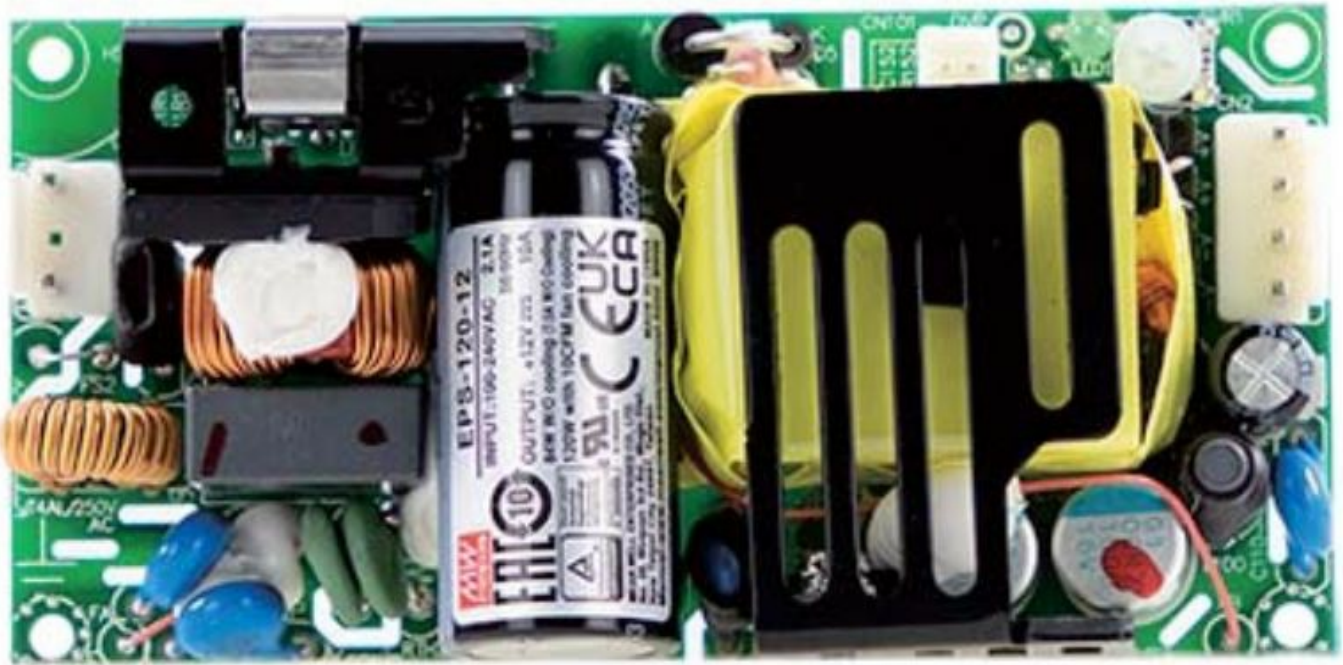

Product Information

Specifications

- **Model:** EPS-120 series
- **Power Output:** 120W
- **Compliance:** UL62368-1, BS EN/EN62368-1, GB4943.1, IEC62368-1 TPTC004

Frequently Asked Questions

- **Q:** Can I use this power supply with multiple devices simultaneously?
 - **A:** It is recommended to use the power supply with one device at a time to ensure optimal performance and safety.
- **Q:** What should I do if the power supply overheats?
 - **A:** If you notice overheating, immediately disconnect the power supply from the device and power source and allow it to cool down before further use.

Product Usage Instructions

Power Supply Connection:

- Ensure the power supply is unplugged before making any connections.
- Connect the power supply to the appropriate power source following the manufacturer's instructions.

Device Connection:

- Connect your device to the power supply using the provided cables.
- Make sure the connections are secure and properly seated.

Powering On/Off:

- To power on the supply, flip the power switch to the ON position.
- To turn off, switch it to the OFF position. Always unplug the power supply when not in use.

Safety Precautions:

- Do not expose the power supply to water or moisture.
- Keep it away from heat sources and ensure proper ventilation around the unit.

Features



- 4"x2" miniature size
- Universal AC input / Full range
- EMI Class B for both Class I (with FG) and Class II (without FG) configuration
- No load power consumption<0.3W
- High efficiency up to 91%
- **Protections:** Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection for 84W and 120W with 10CFM forced air
- Built-in 12V/0.5A fan supply
- LED indicator for power on
- Operating altitude up to 5000 meters
- 3 years warranty

Applications



- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus


GTIN CODE

- **MW Search:** <https://www.meanwell.com/serviceGTIN.aspx>

Description

EPS-120 is a 120W highly reliable green PCB type power supply with a high power density on the 4" by 2" footprint. It accepts 80~264VAC input and offers various output voltages between 12V and 48V. The working efficiency is up to 91% and the extremely low no load power consumption is down below 0.3W. EPS-120 is able to be used for both Class I (with FG) and Class II (no FG) system design. EPS-120 has the complete protection functions; it is complied with the international safety regulations such as TUV BS EN/EN62368-1, UL62368-1 and IEC62368-1. EPS-120 series serves as a high price-to-performance power supply solution for various industrial applications.

Model Encoding

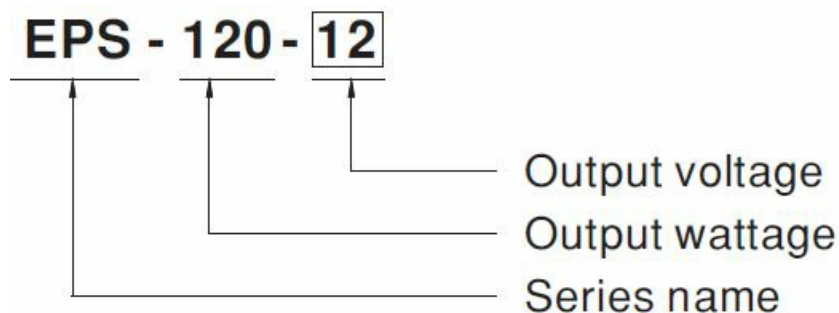

SPECIFICATION


MODEL			EPS-120-12	EPS-120-15	EPS-120-24	EPS-120-27	EPS-120-48
OUTPUT	DC VOLTAGE		12V	15V	24V	27V	48V
	CURRENT	10CFM	10A	8A	5A	4.5A	2.5A
		Convection	7.0A	5.6A	3.5A	3.15A	1.75A
	RATED POWER	10CFM	120W	120W	120W	121.5W	120W
		Convection	84W	84W	84W	85W	84W
	RIPPLE & NOISE (max.) Note.2		120mVp-p	120mVp-p	150mVp-p	150mVp-p	200mVp-p
	VOLTAGE ADJ. RANGE		11.4~12.6V	14.3~15.8V	22.8~25.2V	25.6 ~ 28.4V	45.6 ~50.4V
	VOLTAGE TOLERANCE Note.3		±2.0%	±2.5%	±1.0%	±1.0%	±1.0%
	LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME		500ms, 30ms/230VAC 500ms, 30ms/115VAC at full load				
	HOLD UP TIME (Typ.)		50ms/230VAC 10ms/115VAC at full load				

INPUT	VOLTAGE RANGE E Note.4	80 ~ 264VAC 113 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	88%	88.5%	90%	90%	91%
	AC CURRENT (Typ.)	2.1A/115VAC 1.2A/230VAC				
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC 60A/230VAC				
	LEAKAGE CURRENT	<0.75mA / 240VAC				
PROTECTION	OVERLOAD	115~150% rated output power				
		Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	13.2 ~ 15.6V	16.5 ~ 19.5V	26.4 ~ 31.2V	29.7 ~ 35V	52.8 ~ 62.4V
		Protection type : Shut down o/p voltage, re-power on to recover				
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, re-power on to recover				
FUNCTION	FAN SUPPLY	12V@0.5A for driving a fan ; tolerance -15% ~ +10% at main output 40% rated current (10CFM)				
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to “Derating Curve”)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)				
	OPERATING ALTITUDE Note.6	5000 meters				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes				
SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL62368-1, TUV BS EN/EN62368-1, IEC62368-1, CCC GB4943.1, EAC TP TC 004 approved				
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH				
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3, GB 9254.1 Class B,GB17625 Class A, EAC TP TC 020				


	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55035, BS EN/EN61000-6-2, heavy industry level, criteria A, EAC TP TC 020
OTHERS	MTBF	3746.9K hrs min. Telcordia SR-332 (Bellcore) ; 491.2K hrs min. MIL-HDBK-2 17F (25°C)
	DIMENSION	101.6*50.8*29mm (L*W*H)
	PACKING	0.15Kg; 72pcs/11.8Kg/0.82CUFT
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</p> <p>5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>✳ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	

Diagrams


Block Diagram

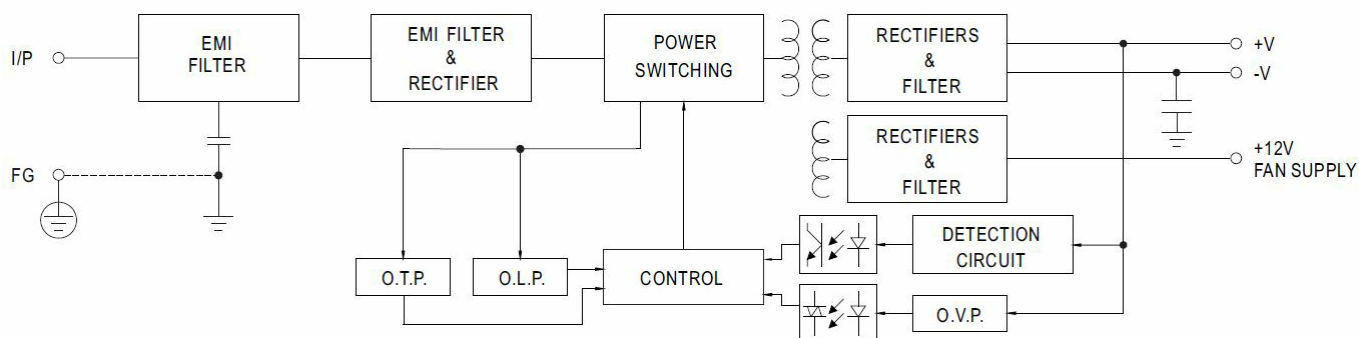


Derating Curve

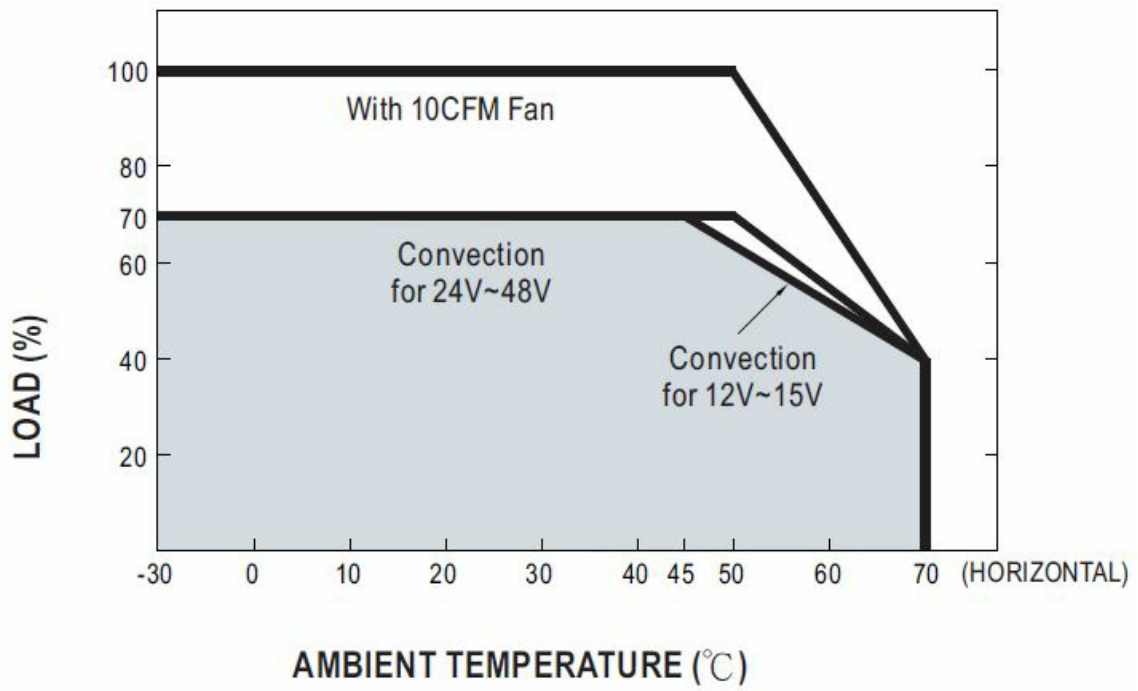

Output Derating VS Input Voltage

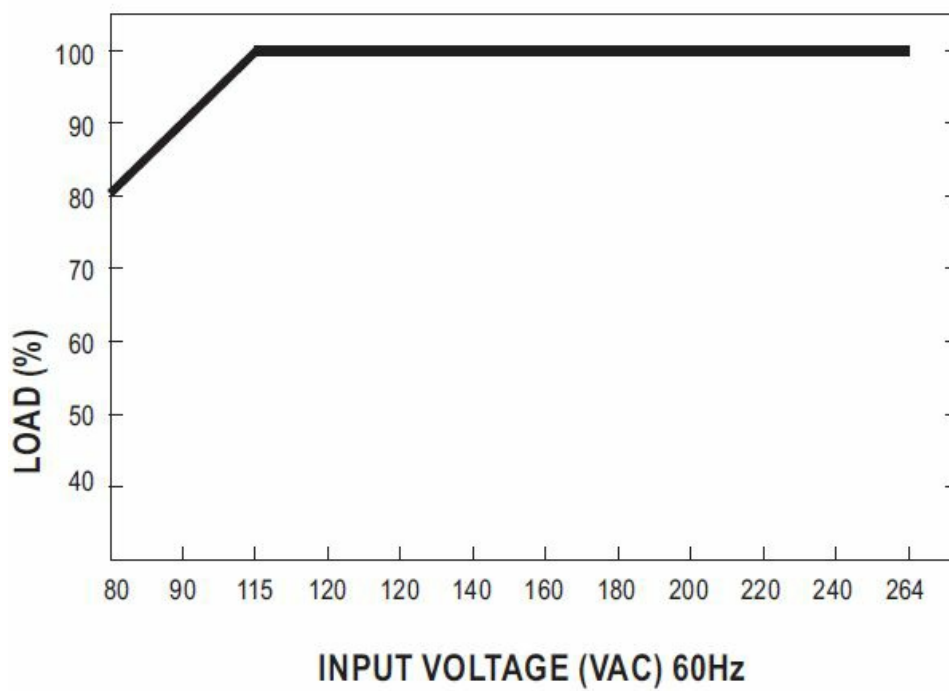


Mechanical Specification

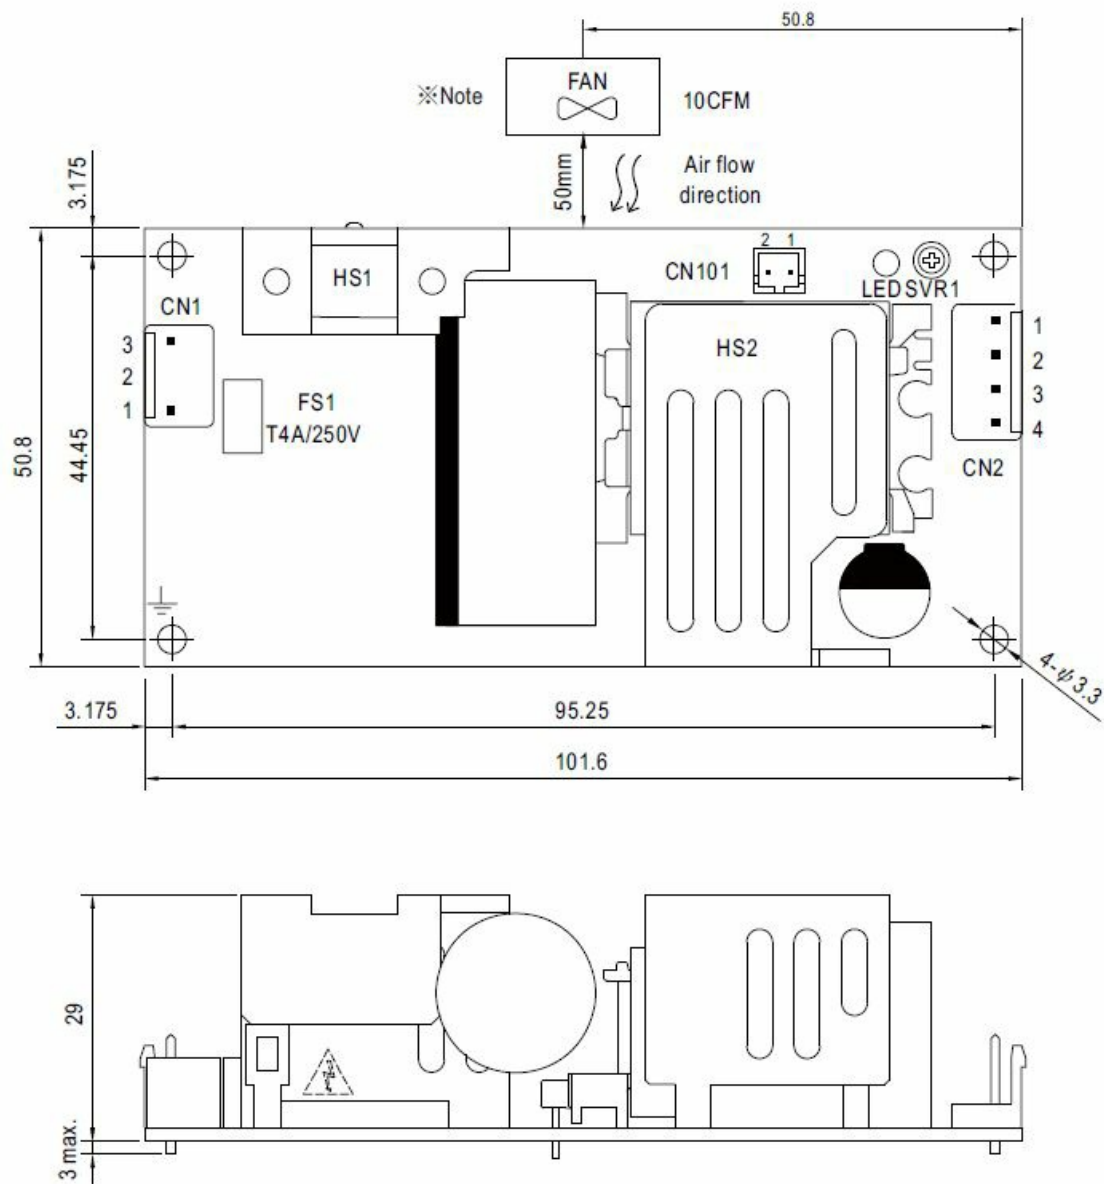

AC Input Connector (CN1): JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/L		

 : Grounding required

1. HS1, HS2 cannot be shorted.
2. HS1 must have safety isolation distance with system case.

DC Output Connector (CN2): JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
3,4	-V		

FAN Connector(CN101): JST B2B-PH-K-S or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	+12V	JST PHR-2 or equivalent	JST SPH-002T-P0.5S or equivalent
2	DC COM		

Note

1. The FAN SUPPLY is designed to serve as the source of the additive external fan for the cooling of the power supply, enabling the full load delivery and assuring the best life span of the product. Please do not use this FAN SUPPLY to drive other devices.
2. The PCB type(Blank type)model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into either ClassI(with FG) or ClassII(without FG) system.


Installation Manual

Please refer to: <http://www.meanwell.com/manual.html>

User's Manual



Documents / Resources

	<p>MEAN WELL EPS-120-12 120W Single Output Switching Power Supply [pdf] Instructions EPS-120-12 120W Single Output Switching Power Supply, EPS-120-12, 120W Single Output Switching Power Supply, Output Switching Power Supply, Switching Power Supply, Power Supply, Supply</p>
---	---

References

- [△ TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [MEAN WELL Switching Power Supply Manufacturer](#)
- [Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [Product Liability Disclaimer-MEAN WELL Switching Power Supply Manufacturer](#)
- [Global Trade Item Number \(GTIN\)-MEAN WELL Switching Power Supply Manufacturer](#)
- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.