



MEAN WELL NPB-120 Series 120W Compact Size and Wide Output Range Charger Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL NPB-120 Series 120W Compact Size and Wide Output Range Charger Owner's Manual 



120W Compact Size and Wide Output Range Charger
NPB-120 series
Owner's Manual



Contents

- 1 NPB-120 Series 120W Compact Size and Wide Output Range Charger
- 2 Features
- 3 Description
- 4 Model Encoding
- 5 SPECIFICATION
- 6 Block Diagram
- 7 Function Manual
- 8 Mechanical Specification
- 9 Installation Diagram
- 10 Plug Assignment
- 11 Documents / Resources
- 11.1 References

NPB-120 Series 120W Compact Size and Wide Output Range Charger

Output connector: TB type




Output connector: AD1/XLR type



User's Manual



<https://www.meanwell.com/Upload/PDF/NPB,NPP-E.pdf>

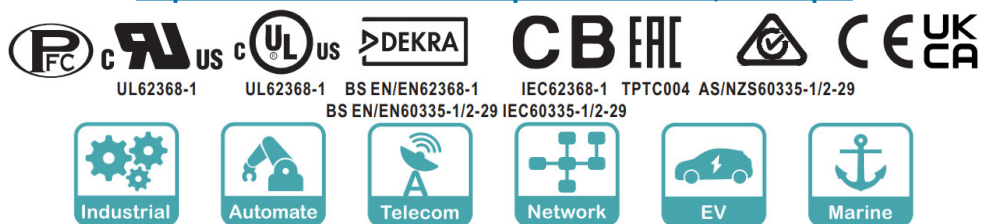

Features

- 90~264Vac universal AC input, built-in PFC

- Charger for compatible with lead-acid and li-ion batteries
 - Fanless design
 - Wide adjustable output range by VR:
 - ▶ Charging voltage adjustable(10.5~15.2V 21~30.4V 42~60 8V)
 - ▶ Charging current adjustable(50~100% rated current)
 - 2 or 3 stage selectable by DIP S.W
 - No load power consumption< 0.15W(AC S.W off)
 - -30 ~+70°C wide operating temperature
- Protections: Short circuit / Over voltage /Over temperature / Battery reverse polarity protection
- Comply with UL/EN62368-1 and EN60335-1/2-29 dual certification
 - Front panel LED indicator for charging status
 - 3 years warranty

Applications

- Radio system backup solution
- Electric scooter charger
- Camping car, Buses, Heavy duty truck, Specialty vehicles
- Surveillance system
- Portable power tools


GTIN CODE





MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

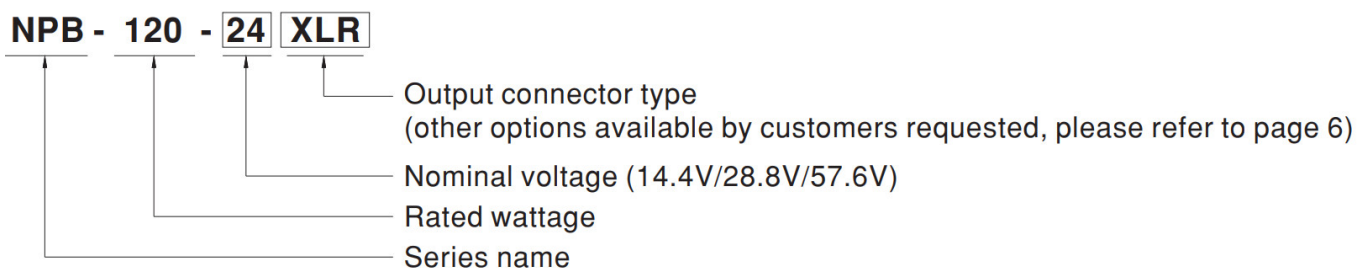NPB-120 series is a 120W charger for compatible with lead-acid (Flooded, Gel, AGM) and li-ion (Lithium iron, lithium manganese) batteries. This product is a class power unit (with FG), equipped with a standard IEC320-C14 AC inlet and two or three-stage charging control. The entire series supplies different models with output voltages ranging between 10.5VDC and 60.8VDC that can satisfy the demands for various types of batteries devices.

Model Encoding



Type	Output Connector	Safety	Note
XL R	3 pin power pin 	 (48V UL certificated same as TB Type)	In Stock
AD 1	Anderson Equivalent Connector 		In Stock
TB	Terminal Block 		In Stock

SPECIFICATION

MODEL		NPB-120-12□	NPB-120-24□	NPB-120-48□
		□=XLR, AD1, TB		
OUT PUT	BOOST CHARGE VOLTAGE(Vboost)(default)	14.4V	28.8V	57.6V
	FLOAT CHARGE VOLTAGE(Vfloat)(default)	13.8V	27.6V	55.2V
	VOLTAGE ADJUSTABLE RANGE	10.5 ~ 15.2V	21 ~ 30.4V	42 ~ 60.8V
	OUTPUT CURRENT(Typ.) Note.5	6.8A	4A	2A
	CURRENT ADJUSTABLE RANGE	50% ~ 100%		
	MAX. POWER Note.3	103.4W	121.6W	121.6W
	RECOMMENDED BATTERY CAPACITY (AMP HOURS) Note.4	20 ~ 90AH	15 ~ 50AH	7 ~ 25AH

INPUT	VOLTAGE RANGE Note.5		90 ~ 264VAC 127 ~ 370VDC		
	FREQUENCY RANGE		47 ~ 63Hz		
	POWER FACTOR (Typ.)		PF>0.98/115VAC, PF>0.92/230VAC@12V,PF>0.93/230VAC@24/48V at full load		
	EFFICIENCY (Typ.)	XLR	86.5%	89%	90.5%
		AD1	86.5%	89%	90.5%
		TB	87%	89.5%	90.5%
	AC CURRENT (Typ.)		1.5A/115VAC 0.8A/230VAC		
INRUSH CURRENT (Typ.)		COLD START 55A at 230VAC			
PROTECTION	SHORT CIRCUIT Note.6		Protection type: Constant current limiting, charger will shutdown after 5 sec, re-power on to recover		
	OVER VOLTAGE		16 ~ 20V	32 ~ 40V	64 ~ 75V
			Protection type: Shut down and latch off o/p voltage, re-power on to recover		
	REVERSE POLARITY		By internal fuse open		
	OVER TEMPERATURE		Hiccup mode, recovers automatically after temperature goes down		
FUNCTION	CHARGING CURVE		2 or 3 stage adjustable by DIP S.W		
ENVIRONMENT	WORKING TEMP.		-30 ~ +70°C (Refer to “Derating Curve”)		
	WORKING HUMIDITY		20 ~ 95% RH non-condensing		
	STORAGE TEMP., HUMIDITY		-40 ~ +85°C, 10 ~ 95% RH non-condensing		
	TEMP. COEFFICIENT		±0.05%/°C (0 ~ 45°C)		
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes		
	SAFETY STANDARDS		CB IEC62368-1,IEC60335-1/2-29, Dekra BS EN/EN62368-1,BS EN/EN60335-1/2-29, UL62368-1, AS/NZS60335-1/2-29, EAC TP TC 004 approved		
	WITHSTAND VOLTAGE		I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC		


SAFE TY & EMC (Note 7)	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032 (CISPR 32),BS EN/EN55014-1	Class B
		Radiated	BS EN/EN55032 (CISPR 32),BS EN/EN55014-1	Class B
		Harmonic Current	BS EN/EN61000-3-2	Class A
		Voltage Flicker	BS EN/EN61000-3-3	—
	EMC IMMUNITY	BS EN/EN55014-2,BS EN/EN55024,BS EN/EN55035		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 2, 3V/m
		EFT / Burst	BS EN/EN61000-4-4	Level 2, 1KV
		Surge	BS EN/EN61000-4-5	Level 2, 1KV/Line-Line,Level 3, 2KV/Line-Earth
		Conducted	BS EN/EN61000-4-6	Level 2, 3Vrms
		Magnetic Field	BS EN/EN61000-4-8	Level 1, 1A/m
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30 % dip 25 periods, >95% interruptions 250 periods
OTHERS	MTBF	1895.4K hrs min. Telcordia TR/SR-332 (Bellcore) ; 225.8K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	182.7*96*49mm (L*W*H)		
	PACKING	1.3Kg; 10pcs/ 14Kg / 1.13CUFT		

NOTE


1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details.
 2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
 3. Refer to derating curve.
 4. This is MEAN WELL's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.
 5. Derating may be needed under low input voltages. Please check the derating curve for more details.
 6. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on.
 7. The charger is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <http://www.meanwell.com>)
- ※ Product Liability Disclaimer For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

Block Diagram


PFC fosc : 65KHz
PWM fosc : 45KHz

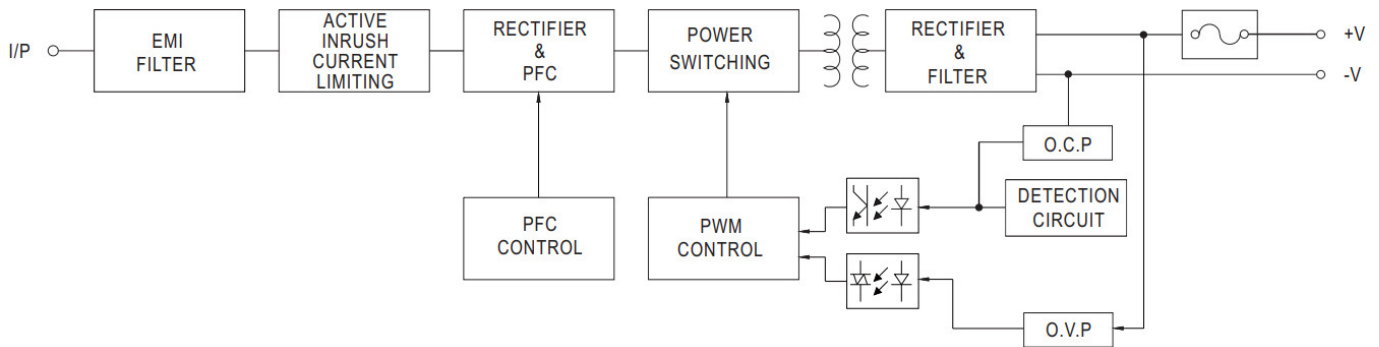

Derating Curve

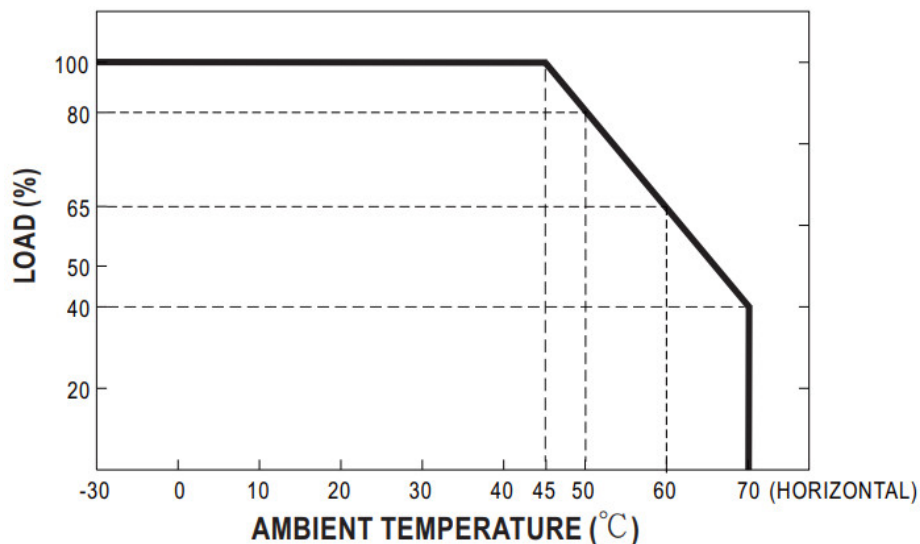

Static Characteristics

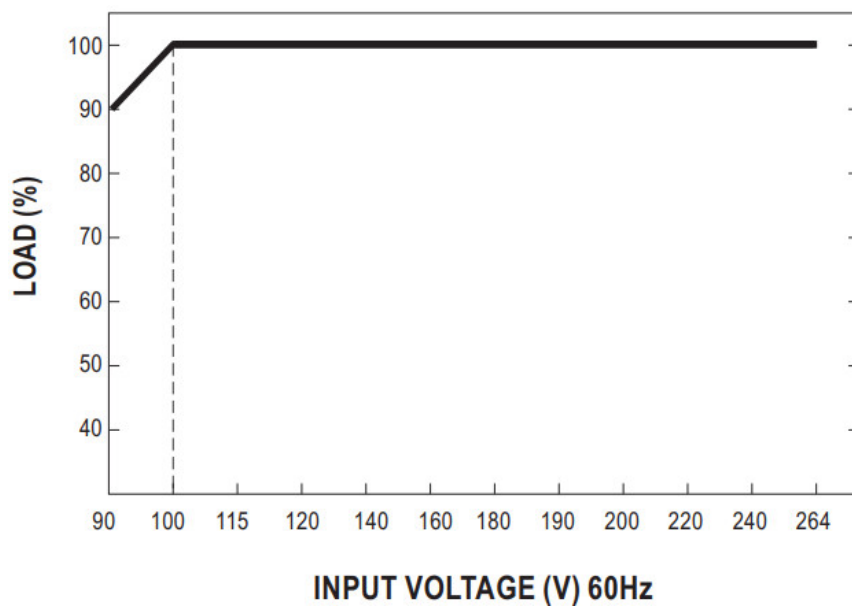


Function Manual

1. Charging Curve


1-1 2 or 3 stage selectable by DIP S.W

※ This series provides 2 or 3 stage charging curve.(Default 3 stage)

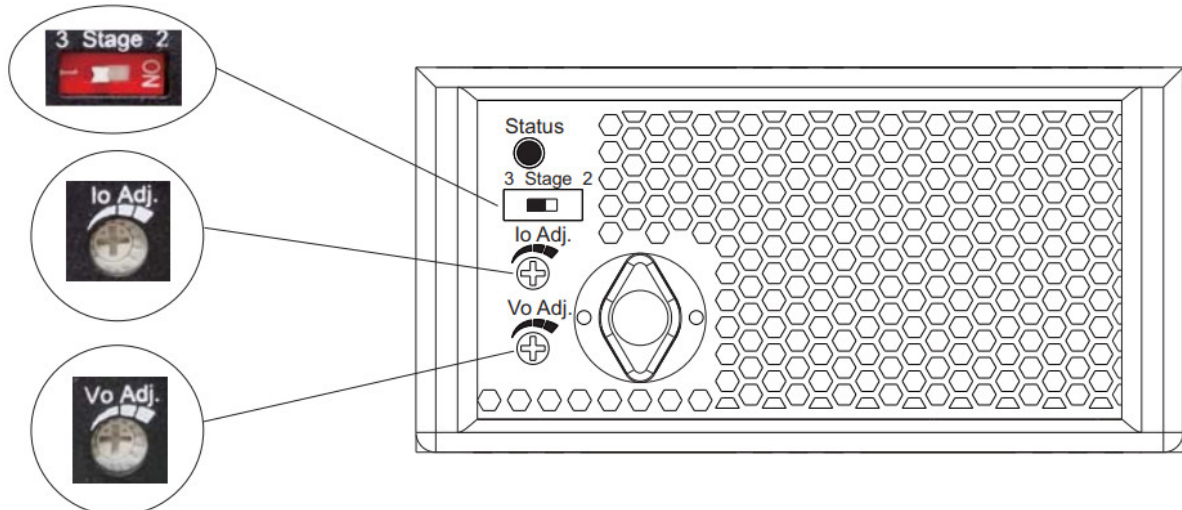


1-2 Charging Curve by DIP S.W

◎ 2 stage charging curve

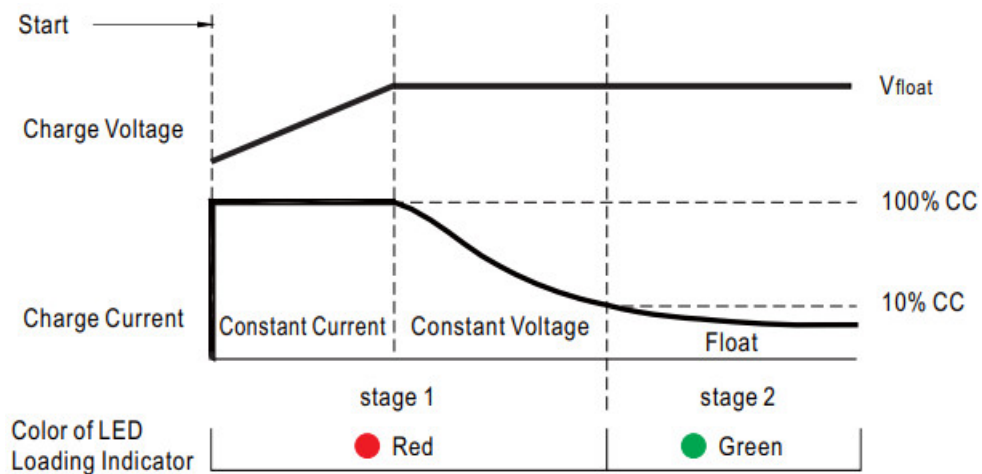

State	NPB-120-12	NPB-120-24	NPB-120-48
Constant Current	6.8A	4A	2A
Vfloat	13.8V	27.6V	55.2V

© 3 stage charging curve

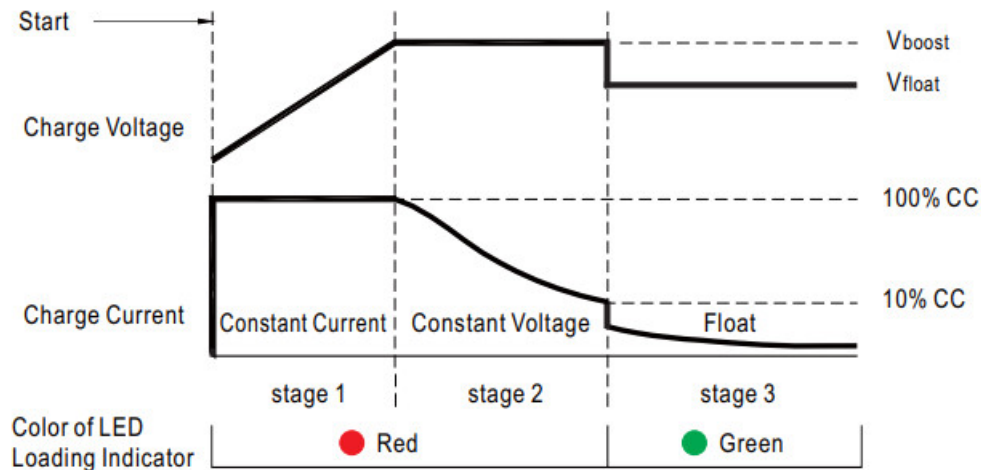

State	NPB-120-12	NPB-120-24	NPB-120-48
Constant Current	6.8A	4A	2A
Vboost	14.4V	28.8V	57.6V
Vfloat	13.8V	27.6V	55.2V

© 2 stage charging cure is suitable for Li-ion batteries(lithium iron and lithium manganese),
3 stage charging cure is suitable for lead-acid batteries (flooded ,Gel and AGM).

2. Charging voltage adjustable by VR

Model	NPB-120-12□	NPB-120-24□	NPB-120-48□
Output voltage adjustable range	10.5~15.2V	21~30.4V	42~60.8V



3. Charging current adjustable by VR

Model	NPB-120-12	NPB-120-24	NPB-120-48
Output current adjustable range	3.4~6.8A	2~4A	1~2A



4. Front panel LED indicators & Corresponding signal at function pins


LED	Description
● Green	Float (stage 3) or Battery full
● Red	Charging (stage 1 or stage 2)




Mechanical Specification

© NPB-120-xx XLR/AD1 (Cable Type)

Case No. PS-120F Unit:mm

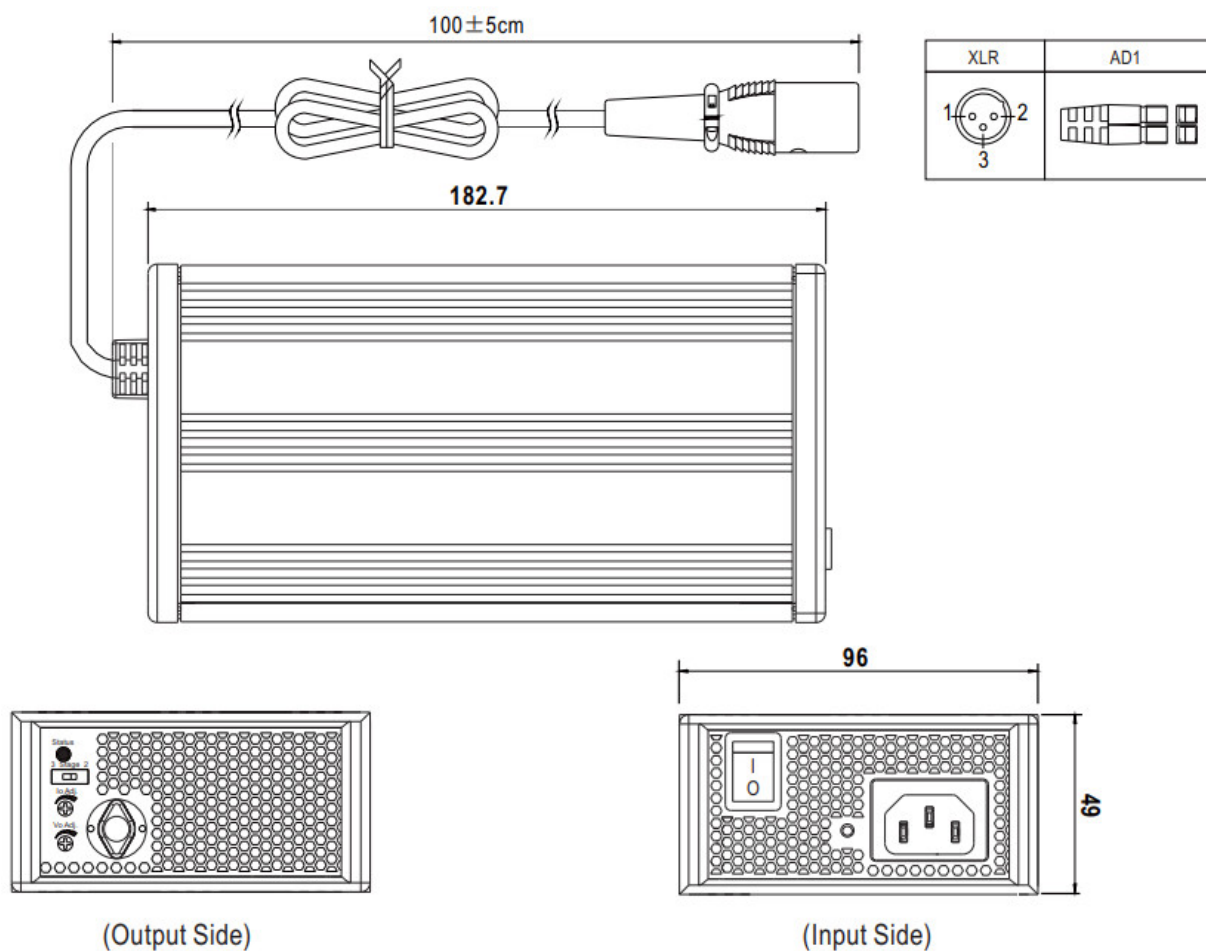


© NPB-120-xx TB (Terminal Block Type)


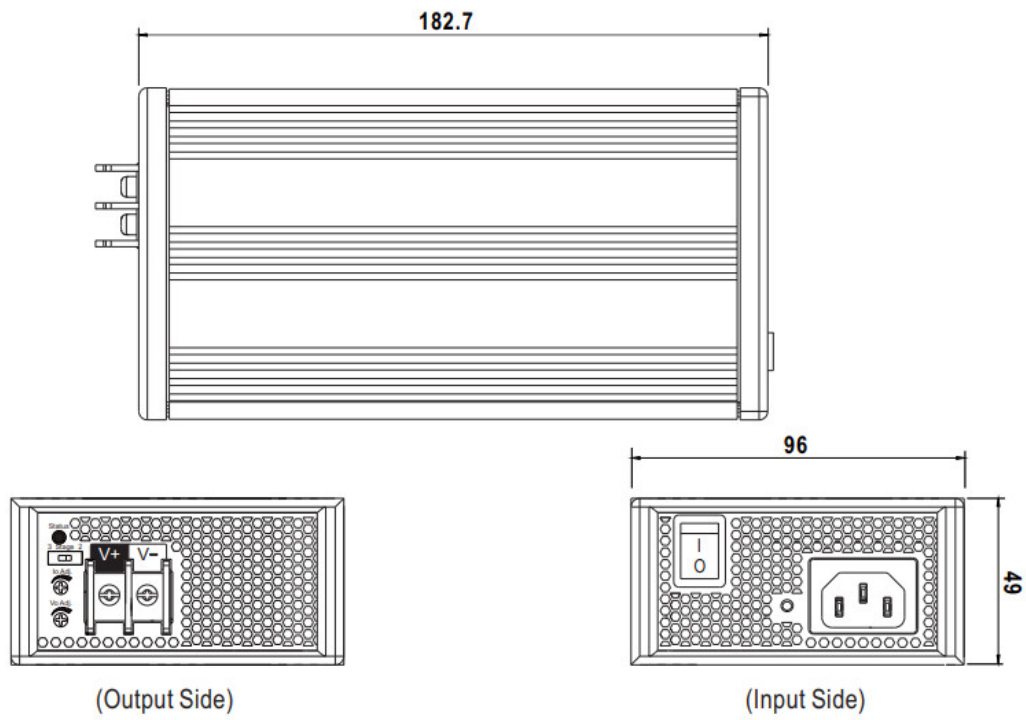


Accessory List

※ Bracket (Optional accessory, Should ordered seperately)

MW's Order No.	Item	Quantity
DGG2MHS012D		4pcs/per model

Installation Diagram

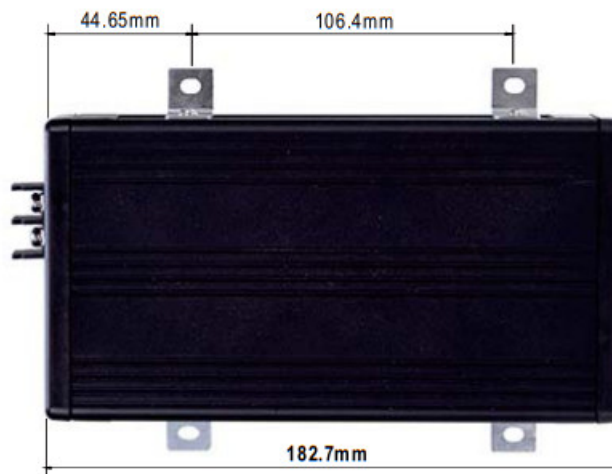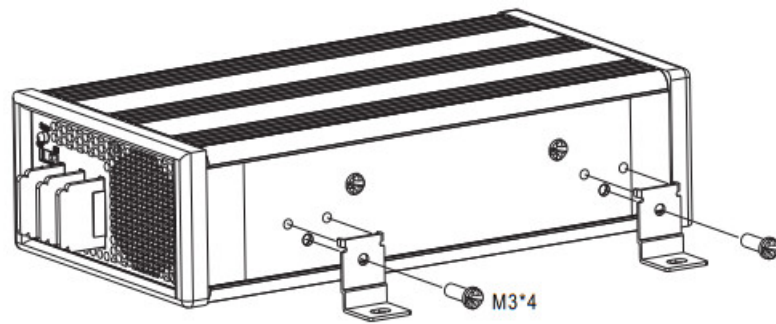


Plug Assignment

© Standard Output Connector

3pin XLR

UNICABLE 89M103-3P or equivalent



PIN NO.

OUTPUT

1

+V


2,3

-V




AD1

housing: Anderson 1327(red), 1327G6(black) equivalent contacts: Anderson 261G2 (45A) equivalent

Red(+V)  Black(-V)


















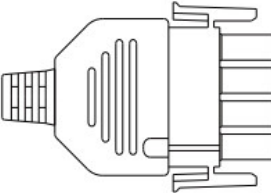
**TB**

DT-66-B11W-02 or equivalent Rating: 300V 40A

+V  -V



© Optional DC plug: (Available in customized)

Min. DIN 4 Pin with Lock (male)	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
   KYCON KPPX-4P equivalent	R7B	1	+Vo
		2	-Vo
		3	-Vo
		4	+Vo
DIN 4 Pin XLR	Type No.	Pin Assignment	
		PIN No.	Output(<10A)
  	XLR4	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo
DIN 3 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
  	D3P	1	+Vo
		2	-Vo
		3	-Vo
DIN 2 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<5A)
  	D2P	1	-Vo
		2	+Vo
DIN 3 Pin	Type No.	Pin Assignment	
		PIN No.	Output(<10A)
  	INL3	N	+Vo
		L	-Vo
AMP 1-480702-0 (6.35mm) equivalent	Type No.	Pin Assignment	
		PIN No.	Output(<7A)
   FG not connected to output connector	C4P	1	+Vo
		2	+Vo
		3	-Vo
		4	-Vo


INSTALLATION MANUAL

Please refer to: <http://www.meanwell.com/manual.html>

File Name: NPB-120-SPEC 2022-08-31



Documents / Resources

	<p>MEAN WELL NPB-120 Series 120W Compact Size and Wide Output Range Charger [pdf] Owner's Manual NPB-120-12, NPB-120-24, NPB-120-48, NPB-120 Series 120W Compact Size and Wide Output Range Charger, 120W Compact Size and Wide Output Range Charger, Compact Size and Wide Output Range Charger, Wide Output Range Charger, Range Charger, Charger</p>
---	---

References

- [MEAN WELL Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [MEAN WELL Product Liability Disclaimer-MEAN WELL Switching Power Supply Manufacturer](#)
- [MEAN WELL Global Trade Item Number \(GTIN\)-MEAN WELL Switching Power Supply Manufacturer](#)