



**NPF-60D Series
60W Single
Output LED Driver**



MEAN WELL NPF-60D Series 60W Single Output LED Driver Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL NPF-60D Series 60W Single Output LED Driver Owner's Manual 

Contents

- [1 MEAN WELL NPF-60D Series 60W Single Output LED Driver](#)
- [2 Features](#)
- [3 Description](#)
- [4 SPECIFICATION](#)
- [5 OUTPUT LOAD vs TEMPERATURE](#)
- [6 STATIC CHARACTERISTIC](#)
- [7 POWER FACTOR \(PF\) CHARACTERISTIC](#)
- [8 FAQs](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



MEAN WELL NPF-60D Series 60W Single Output LED Driver



Features

- Plastic housing with class II design
- Built-in active PFC function

- Class 2 power unit
- Standby power consumption <0.5W
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty

Applications

- LED panel lighting
- LED downlight
- LED decorative lighting
- LED tunnel lighting
- Moving sign
- Type “HL” for use in Class I, Division 2 hazardous (Classified) location


GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

NPF-60D series is a 60W AC/DC LED driver featuring the constant current mode output. NPF-60D operates from 90N305VAC and offers models with different rated voltage, ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C~+85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-60D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for the LED lighting system.

Model Encoding

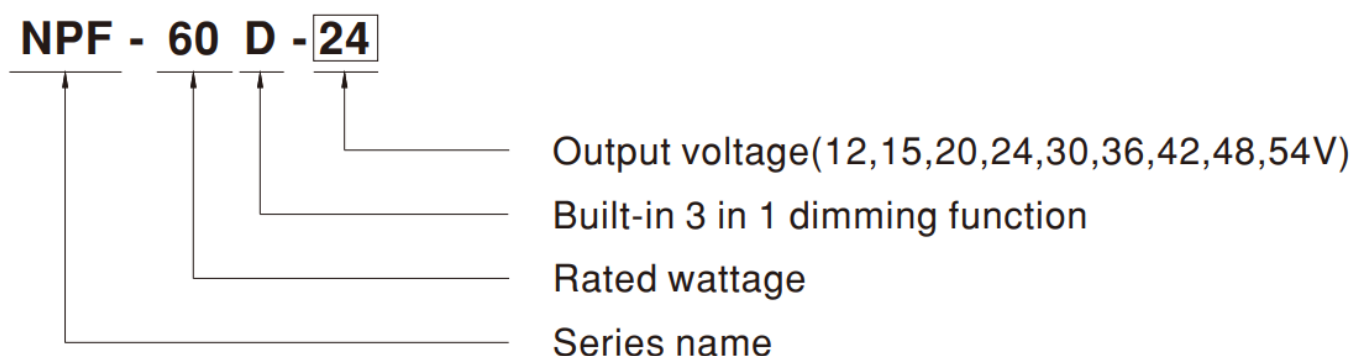

SPECIFICATION

MODEL		NPF-6 0D-12	NPF-6 0D-15	NPF-6 0D-20	NPF-6 0D-24	NPF-6 0D-30	NPF-6 0D-36	NPF-6 0D-42	NPF-6 0D-48	NPF-6 0D-54
	RATED CURRENT	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A

OUTP UT	RATED POWER	60W	60W	60W	60W	60W	60.12 W	60.06 W	60W	60.48 W
	CONSTANT CUR RENT REGION	7.2 ~ 1 2V	9 ~ 15 V	12 ~ 2 0V	14.4 ~ 24V	18 ~ 3 0V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	CURRENT RIPPL E	5.0% max. @rated current								
	CURRENT TOLE RANCE	±5.0%								
	SET UP TIME No te.3	500ms/115VAC, 230VAC								
INPU T	VOLTAGE RANG E Note.2	90 ~ 305VAC 127 ~ 431VDC (Please refer to “STATIC CHARACTERISTIC” section)								
	FREQUENCY RA NGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to “POWER FACTOR (PF) CHARACTERISTIC” section)								
	TOTAL HARMON IC DISTORTION	THD< 20%(@load≥60%/115VC, 230VAC; @load≥75%/277VAC) (Please refer to “TOTAL HARMONIC DISTORTION(THD)” section)								
	EFFICIENCY(Typ.)	86%	87%	88%	89%	90%	90%	90%	90%	90%
	AC CURRENT (Ty p.)	0.8A / 115VAC 0.4A / 230VAC 0.32A / 277VAC								
	INRUSH CURRE NT(Typ.)	COLD START 50A(twidth=270µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. NO. of PSU s on 16A CIRCUIT BREAKER	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURR ENT	<0.25mA / 277VAC								
	STANDBY POWE R CONSUMPTIO N	<0.5W								
PROT ECTI ON	OVER CURRENT	95 ~ 108%								
		Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE	15 ~ 1 7V	17.5 ~ 21V	23 ~ 2 7V	28 ~ 3 4V	34 ~ 4 0V	41 ~ 4 6V	46 ~ 5 4V	54 ~ 6 0V	59 ~ 6 6V
Shut down o/p voltage, re-power on to recover										

	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to “ OUTPUT LOAD vs TEMPERATURE” section)
	MAX. CASE TEMP.	Tcase=+85°C
	WORKING HUMIDITY	20 ~ 95% RH non-condensing
	STORAGE TEMP. , HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS	UL8750(type“HL”), UL879(for 12V,24V only), CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13, BS EN/EN62384 independent, EAC TP TC 004,GB19510.1,GB19510.14, IP67 approved ; Design refer to BS EN/EN60335-1
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load≥60%) ; BS EN/EN61000-3-3; GB/T 17743, GB17625.1,EAC TP TC 020
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity Line-Line 2KV); EAC TP TC 020
OTHERS	MTBF	3082.1K hrs min. Telcordia SR-332 (Bellcore) ; 287.9K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	150*53*35mm (L*W*H)
	PACKING	0.49Kg;30pcs/15.7Kg/1.0CUFT


1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.
2. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
4. The standby power consumption is specified for 230VAC.
5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

(as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
6. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly tc point (or TMP, per DLC), is about 75°C or less.
7. Please refer to the warranty statement on MEAN WELL's website at <http://www.meanwell.com>
8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
9. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf

NOTE


※ Product Liability Disclaimer For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

BLOCK DIAGRAM

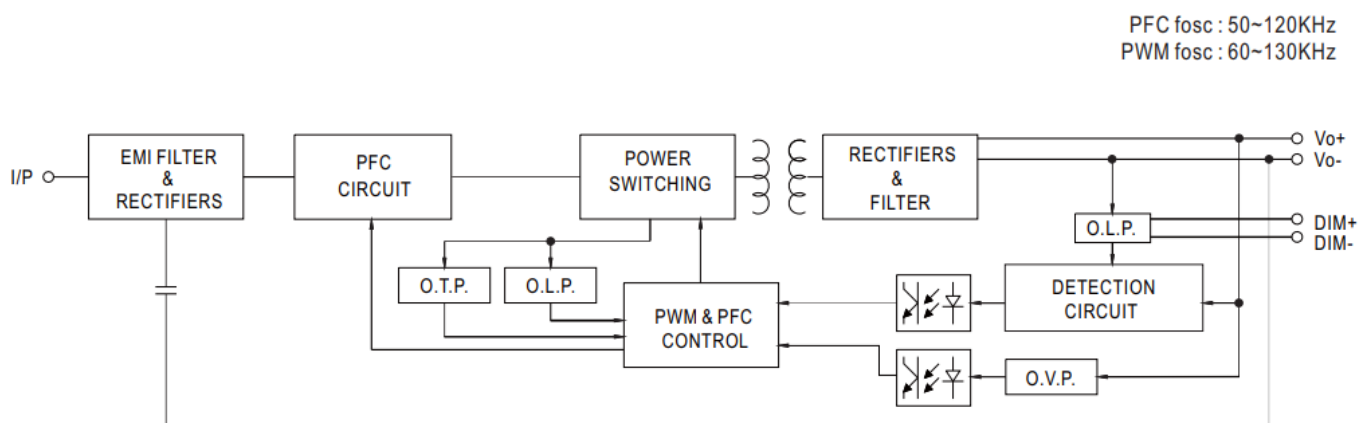

DRIVING METHODS OF LED MODULES

- This series works in constant current mode to drive the LEDs.

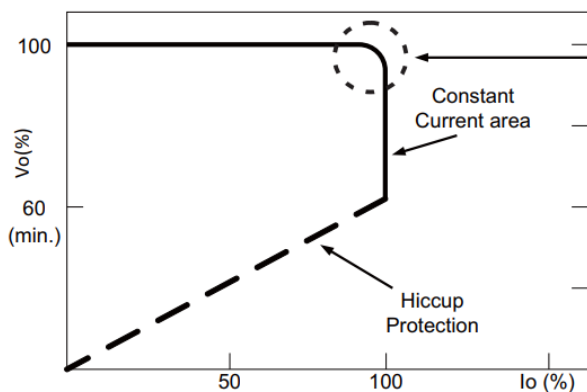


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



DIMMING OPERATION

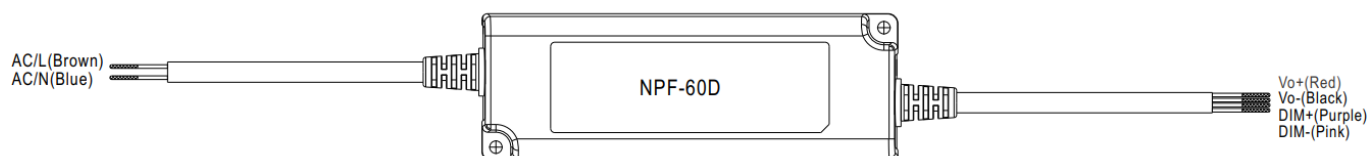



3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



Applying additive 0 ~ 10VDC

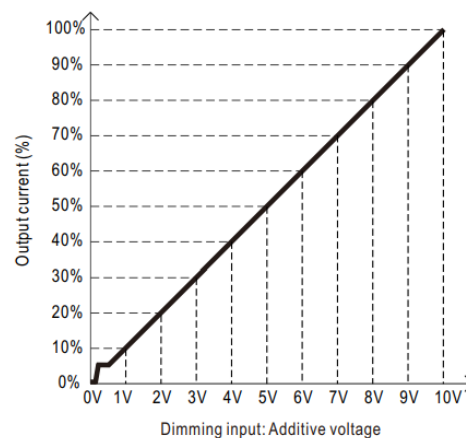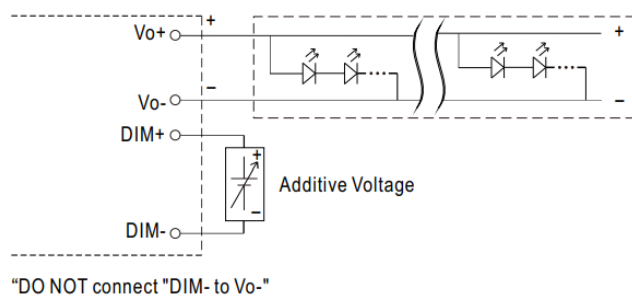

◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

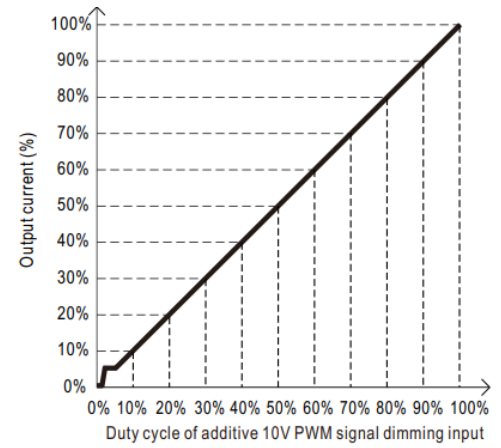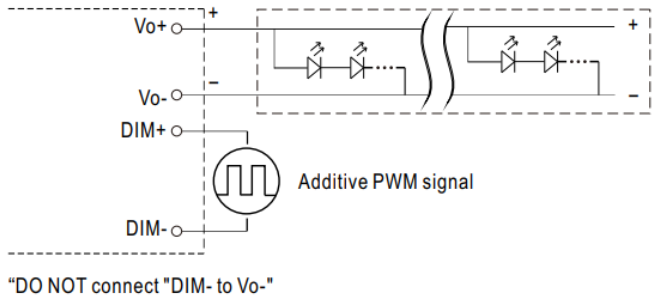



◎ Applying additive resistance:

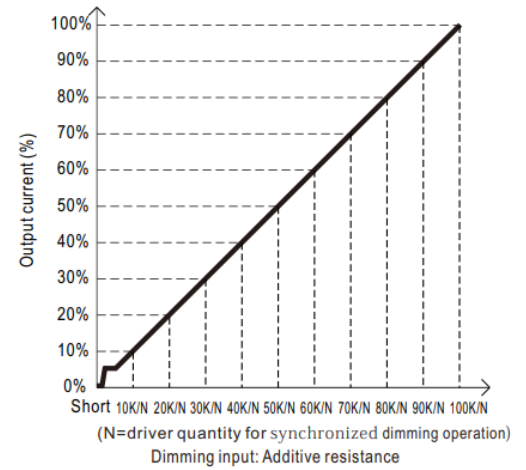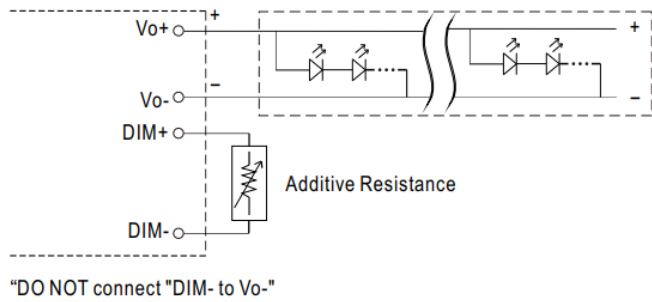


Note

1. Min. dimming level is about 6% and the output current is not defined when $0\% < I_{out} < 6\%$.
2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.

OUTPUT LOAD vs TEMPERATURE

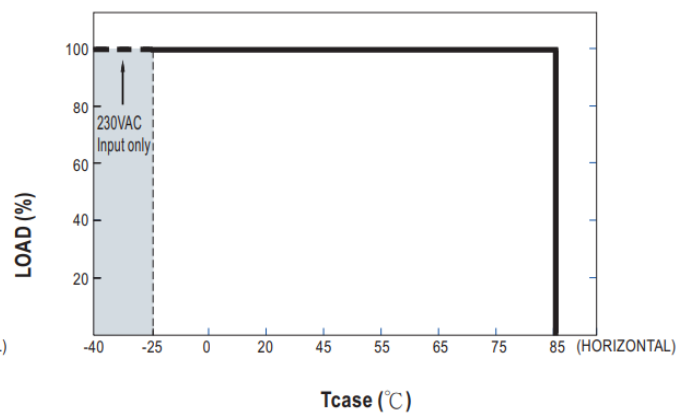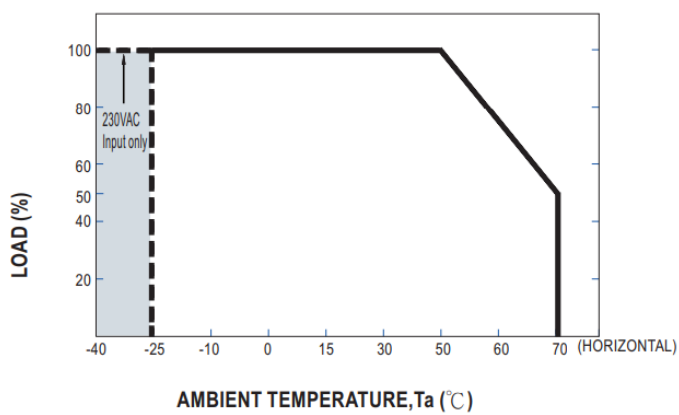


STATIC CHARACTERISTIC

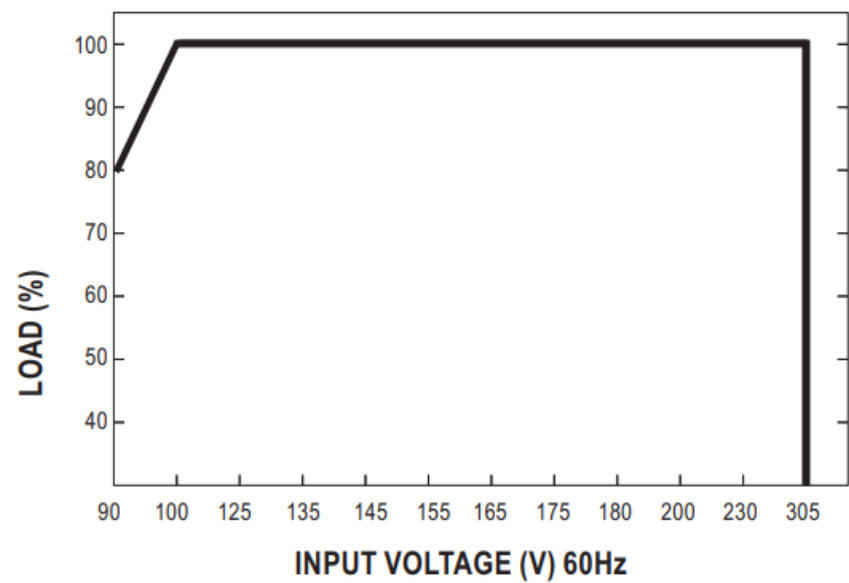


※ De-rating is needed under low input voltage.

POWER FACTOR (PF) CHARACTERISTIC

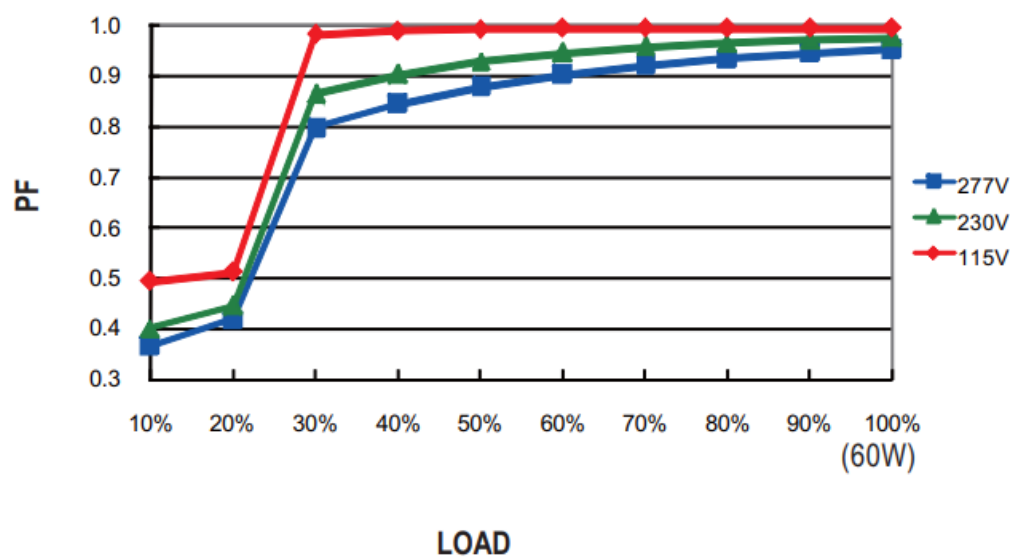

TOTAL HARMONIC DISTORTION (THD)


※ 48V Model, Tcase at 75°C

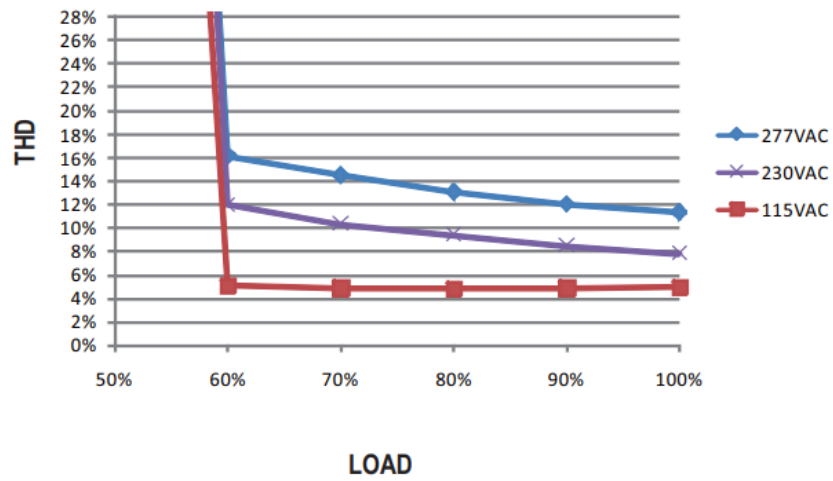


POWER FACTOR (PF) CHARACTERISTIC

NPF-60D series possess superior working efficiency that up to 90% can be reached in field applications.



- 48V Model, Tcase at 75°C

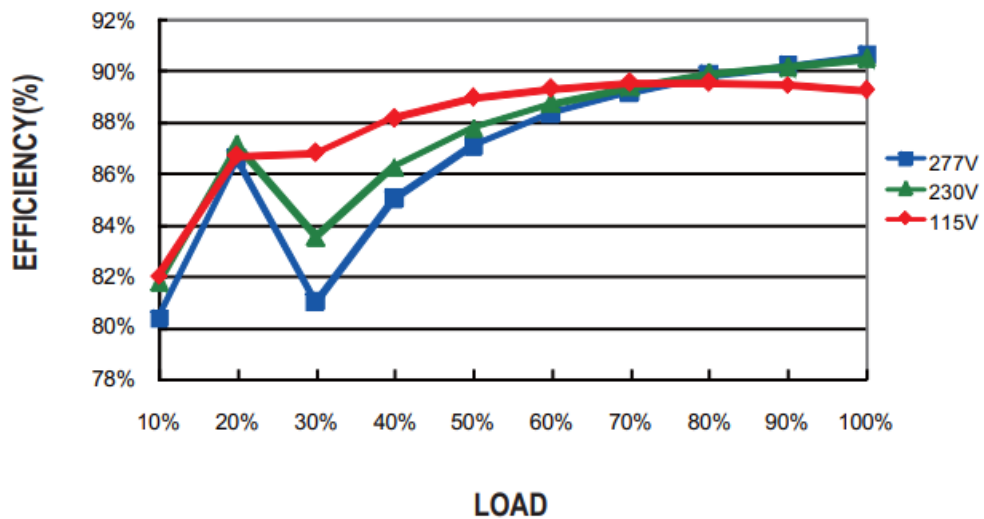


LIFE TIME

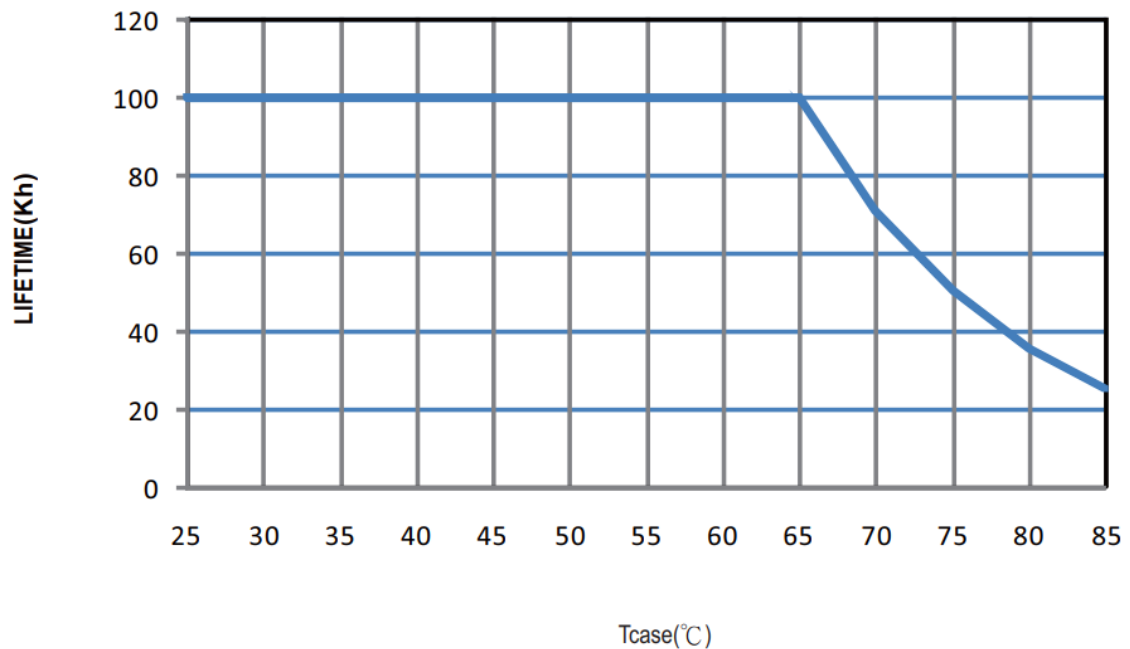

MECHANICAL SPECIFICATION

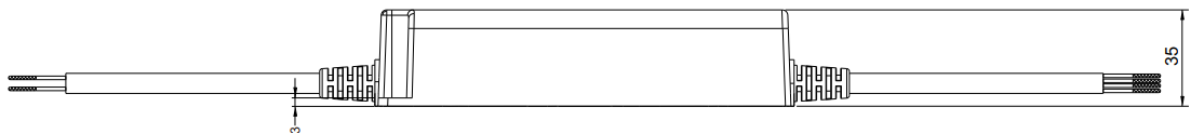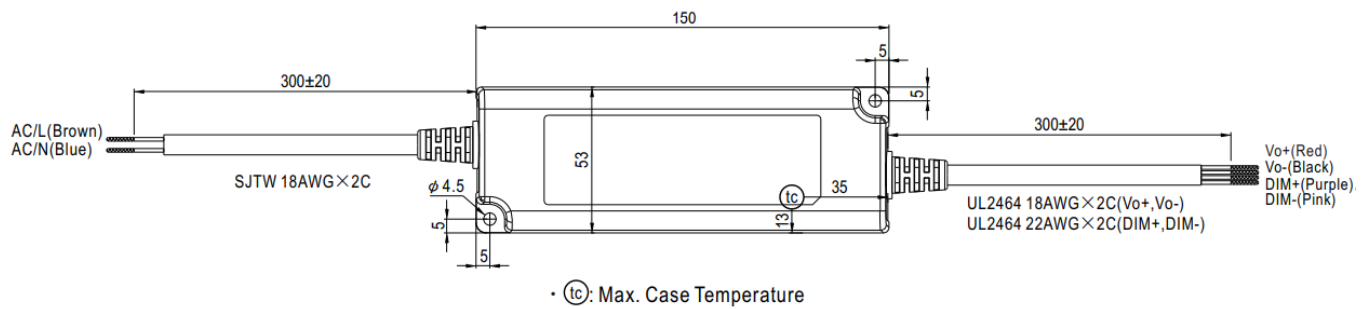

Recommend Mounting Direction

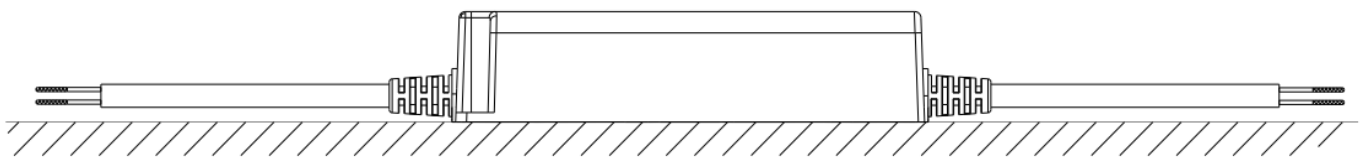

INSTALLATION MANUAL

Please refer to: <http://www.meanwell.com/manual.html>

FAQs

Q: What should I do if the LED driver overheats?


A: If the LED driver overheats, immediately switch off the power supply and allow it to cool down before investigating further. Check for any obstructions to ventilation and ensure proper airflow around the driver.

Q: Can I connect multiple LED modules to one LED driver?

A: The maximum number of LED modules that can be connected to one LED driver depends on the total power consumption of the LEDs and should not exceed the maximum load capacity specified for the LED driver in the

user manual.

Documents / Resources

	<p>MEAN WELL NPF-60D Series 60W Single Output LED Driver [pdf] Owner's Manual NPF-60D-12, NPF-60D-15, NPF-60D-20, NPF-60D-24, NPF-60D-30, NPF-60D-36, NPF-60D-42, NPF-60D-48, NPF-60D-54, NPF-60D Series 60W Single Output LED Driver, NPF-60D Series, 60W Single Output LED Driver, Output LED Driver, LED Driver, Driver</p>
---	--

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.