



MEAN WELL RST-15K-HV 15KW Input With High Voltage Output Instruction Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL RST-15K-HV 15KW Input With High Voltage Output Instruction Manual 

Contents

- 1 [MEAN WELL RST-15K-HV 15KW Input With High Voltage Output](#)
- 2 [Features](#)
 - 2.1 [Applications](#)
- 3 [SPECIFICATION](#)
 - 3.1 [Function Manual](#)
 - 3.2 [Mechanical Specification](#)
- 4 [Documents / Resources](#)
 - 4.1 [References](#)
- 5 [Related Posts](#)



MEAN WELL RST-15K-HV 15KW Input With High Voltage Output



Features

- 3 ψ 3-wire / Δ 196~305VAC or 3 ψ 4-wire / Y 340~530VAC
- High efficiency up to 94%
- Forced air cooling
- Output voltage and constant current level programmable
- Wide voltage adjustment range 1~120%
- Active current sharing up to 2 units(28.5KW)
- Built-in remote ON-OFF control / Alarm signal
- Protections: Short circuit / Overload / Over voltage / Over temperature / Fan fail
- 5 years warranty

Applications

Energy & power system

- U.V or laser diode application
- Electrolysis system
- Factory control or automation apparatus
- Burn-in facility
- RF application

·EV charging station


- **Description**

RST-15K-HV is a 15KW 3 ψ input enclosed type AC/DC power supply. This series operates for the wide range three phase AC input and offers the models with the high voltage DC output(115V/230V/380V) that mostly demanded from the industry. This series provides models with forced air cooling, that can be working at ambient temperature up to 70°C. Moreover, RST-15K-HV provides vast design flexibility by equipping various built-in functions such as the output programming, active current sharing, remote ON- OFF control, alarm signals. etc.

- Model Encoding

Model Encoding

RST - 15K - 115

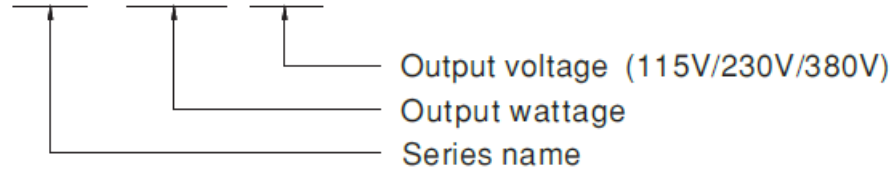

SPECIFICATION

MODEL		RST-15K-115	RST-15K-230	RST-15K-380
OUTPUT	DC VOLTAGE (factory default)	115V	230V	380V
	CURRENT (factory default)	130A	64.8A	39.55A
	CURRENT RANGE	0 ~ 130A	0 ~ 69A	0 ~ 45A
	RATED POWER	14950W	14904W	15030W
	FULL POWER VOLTAGE RANGE	115 ~ 138V	216 ~ 260V	334 ~ 400V
	RIPPLE & NOISE (max.) Note.2	1Vp-p	2Vp-p	4Vp-p
	VOLTAGE ADJ. RANGE	90 ~ 138V	170 ~ 260V	260 ~ 400V
		Can be adjusted via built-in potentiometer		
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%

	LOAD REGULATION	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	3000ms, 200ms at full load		
	HOLD UP TIME (Typ.)	16ms 230VAC/400VAC at 75% load 10ms / 230VAC/400VAC at full load		
INPUT	VOLTAGE RANGE	3 ψ 3W/ Δ 196~305VAC or 3 ψ 4W/Y 340~530VAC		
	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR (Typ.)	\geq 0.98/230VAC(400VAC)/ \geq 0.97/277VAC(480VAC) at full load		
	EFFICIENCY (Typ.) Note.7	93%	94%	94%
	AC CURRENT (Typ.)	45A/230VAC(3 ψ 3-wire / Δ) 26A/230VAC(3 ψ 4-wire / Y)		
	INRUSH CURRENT (Typ.)	150A/230VAC(3 ψ 3-wire / Δ) 100A/230VAC(3 ψ 4-wire / Y)		
	LEAKAGE CURRENT	<3.5mA/Y 530VAC <21mA / Δ 305VAC		
PROTECTION	OVERLOAD	100 ~ 107% of rated current		
		Protection type : Constant current limiting, unit will shutdown after 5 sec. re-power on to recover		
	OVER VOLTAGE	145 ~ 166V	273 ~ 312V	420 ~ 480V
		Protection type : Shut down o/p voltage, re-power on to recover		

	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down
FUNCTION	CURRENT SHARING	Up to 2 units. Please refer to the Function Manual
	OUTPUT VOLTAGE PROGRAMMABLE	Adjustment of output voltage is allowable between 1 ~ 120% of nominal output voltage. Please refer to the PV curve Function Manual
	CONSTANT CURRENT LEVEL PROGRAMMABLE	Adjustment of constant current level is allowable between 20 ~ 100% of rated current. Please refer to the Function Manual
	REMOTE ON-OFF CONTROL	Please refer to the Function Manual
	ALARM SIGNAL OUTPUT	AC fail, DC OK, fan fail, OTP. Please refer to the Function Manual.
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to “Derating Curve”)
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 45°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes
	SAFETY STANDARDS	UL62368-1, CAN/CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved
	WITHSTAND VOLTAGE	I/P-O/P:4.3KVDC I/P-FG:2.8KVDC O/P-FG:2.8KVDC


SAFETY & EMC
(Note 6,8)

	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032 (CISPR 32) / BS EN/EN55011 (CISPR11)	Class B
		Radiated	BS EN/EN55032 (CISPR 32) / BS EN/EN55011 (CISPR11)	Class A
		Harmonic Current	BS EN/EN61000-3-12	—
		Voltage Flicker	BS EN/EN61000-3-3	—
	EMC IMMUNITY	BS EN/EN55024 , BS EN/EN61204-3, BS EN/EN61000-6-2		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact
		Radiated	BS EN/EN61000-4-3	Level 3
		EFT / Burst	BS EN/EN61000-4-4	Level 3
		Surge	BS EN/EN61000-4-5	Level 4, 4KV/Line-Earth ; Level 3, 2KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 3
		Magnetic Field	BS EN/EN61000-4-8	Level 4


		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30 % dip 25 periods, >95% interruptions 250 periods
OTHERS	MTBF	121.9K hrs min. Telcordia SR-332 (Bellcore) ; 16.2K hrs min. MIL-HDB K-217F (25°C)		
	DIMENSION	540*424*83.5mm (L*W*H)		
	PACKING	25Kg; 1pcs/25Kg/2.82CUFT		
NOTE	<div>1. All parameters NOT specially mentioned are measured at Δ230VAC(Y 400VAC) input, rated load and 25°C of ambient temperature.</div> <div>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</div> <div>3. Tolerance :includes set up tolerance, line regulation and load regulation.</div> <div>4. Derating may be needed under low input voltages. Please check the derating curve for more details.</div> <div>5. If use PV signal to adjust Vo, under creatin operation conditions, ripple noise of Vo might go over rating defined in this specification.</div> <div>6. Need additional EMI filter to meet regulations of EMC conducted and radiated emission. Characteristics of EMI filter please refer to the table, Minimum Insertion Loss.</div> <div>7. The efficiency is measured at Δ: 230VAC/Y: 400VAC input. The efficiency level is measured at output voltage 115V(115V model)/230V(230V model)/ 380V(380V model).</div> <div>8. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 600mm*900mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</div> <div>9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</div> <div>10. An unstable O/P voltage is expected in the first 300ms after power on. A minimum load of 5% is suggested if fast load change is required at power on phase.</div> <div>11. Product Liability Disclaimer For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</div>			

Block Diagram


PFC fosc : 65KHz
PWM fosc : 85KHz

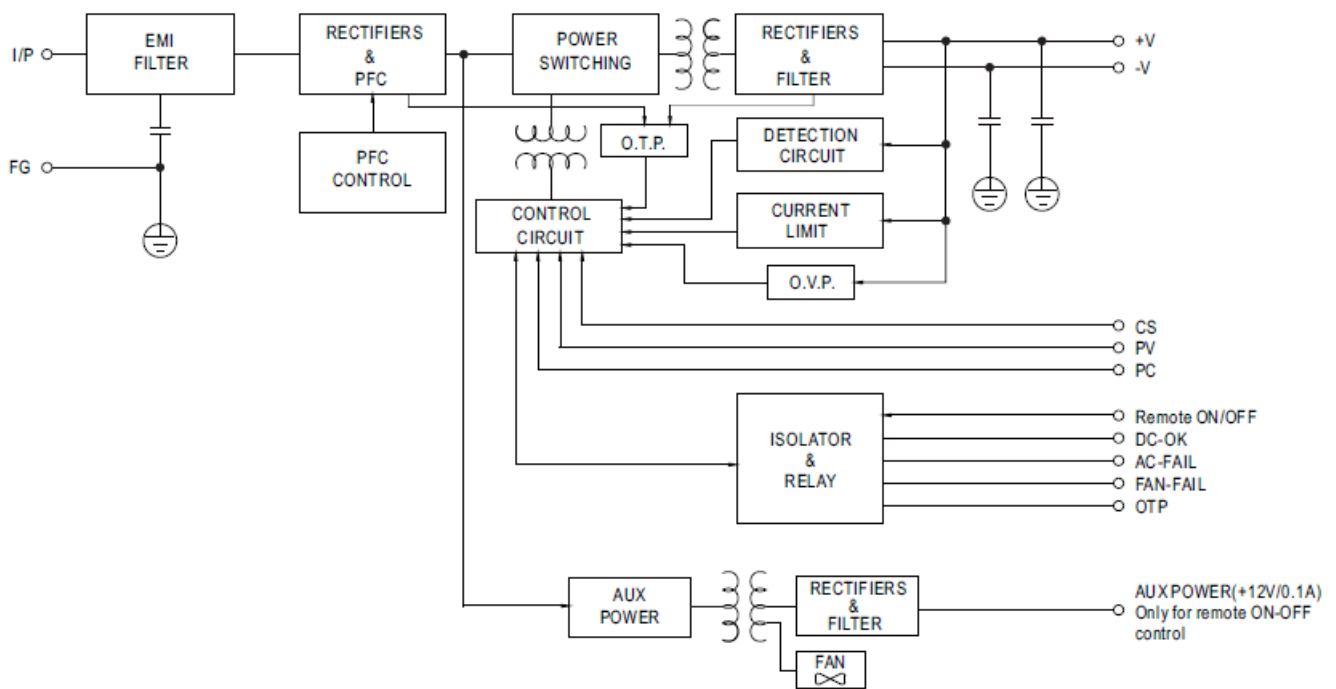


DERATING CURVE

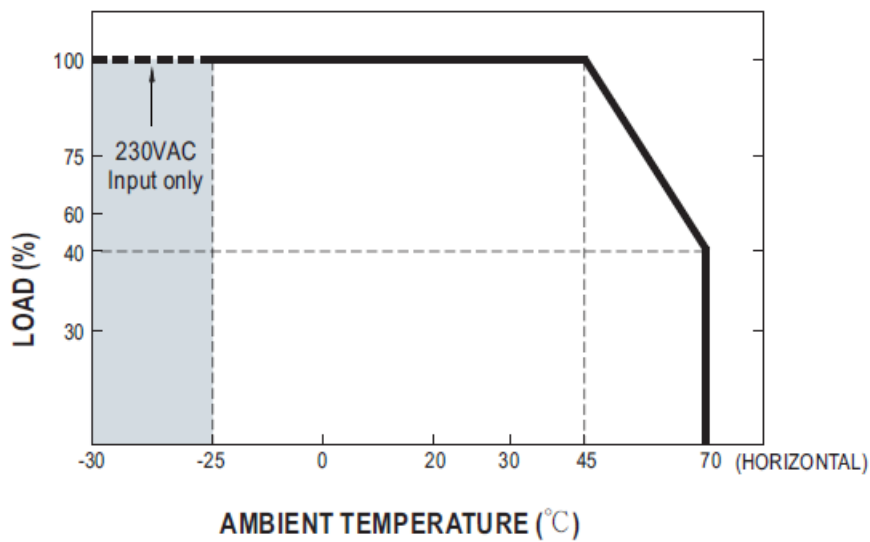

STATIC CHARACTERISTICS

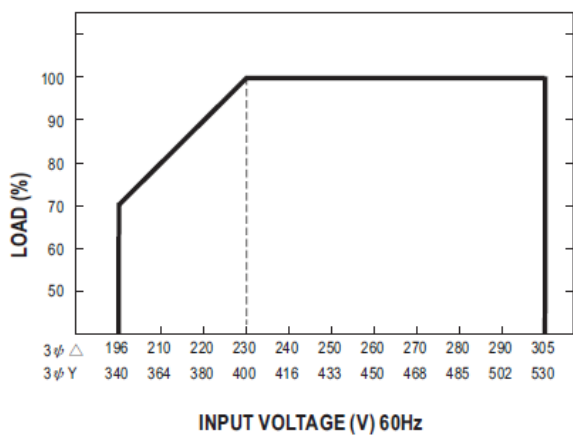

EFFICIENCY VS LOAD (380V MODEL)

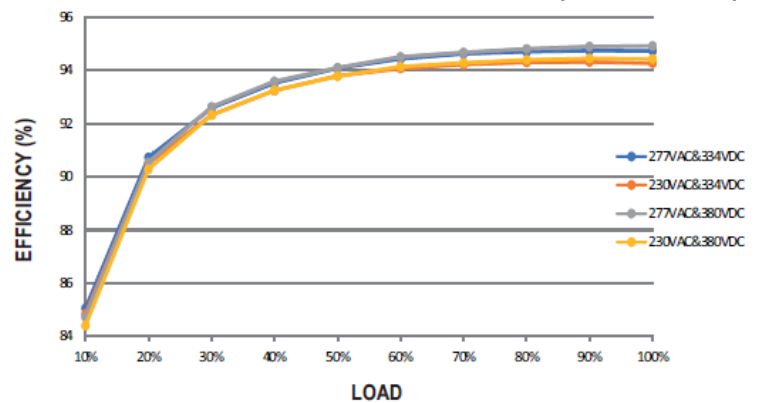

AC Power Connection

Fig 1.2

©3ψ3-wire /△196~305VAC

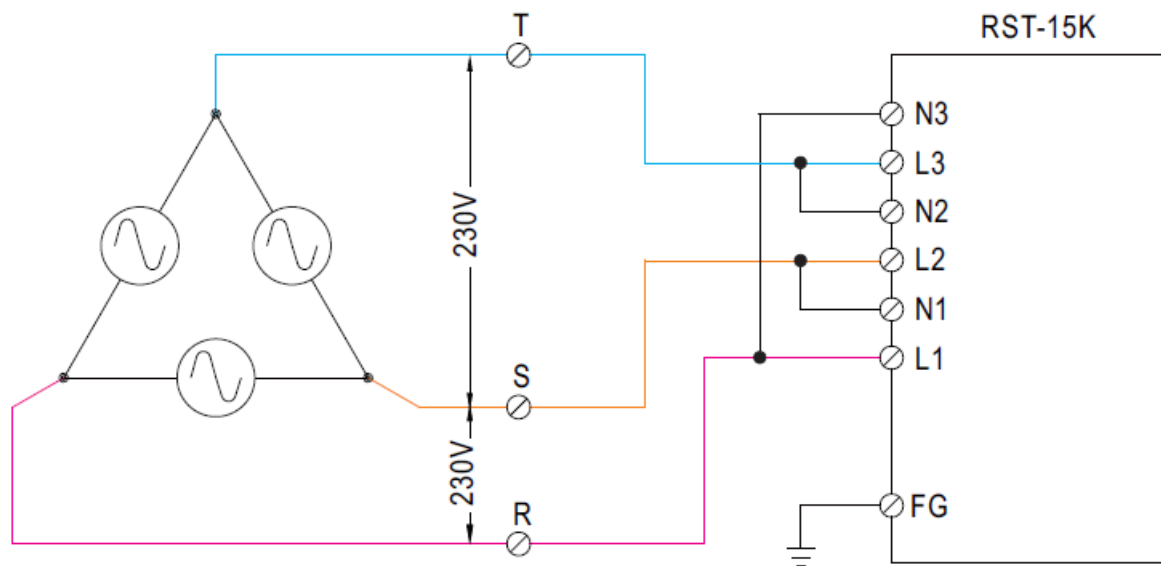


Fig 1.1

ψ 3 4-wire / Y 340~530VAC

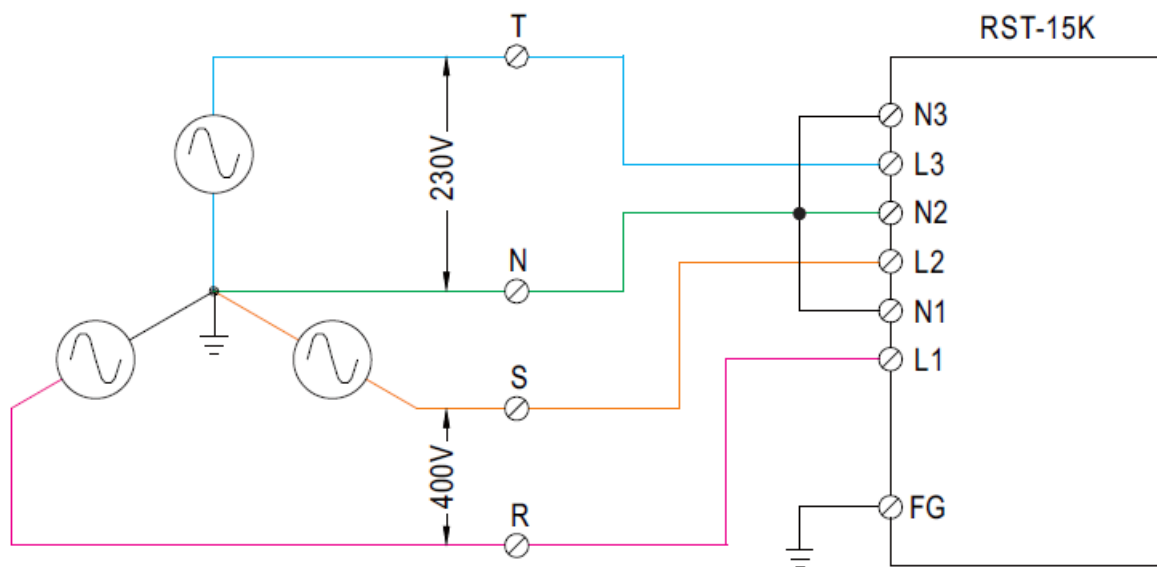


Fig 1.2

Note : RST-15K can also be operated by 1φ2-wire 196~305VAC input. Please refer to the connection diagram below.

Operating with 1φ2-wire may lead to certain characteristics different from the specification, such as the larger Ripple and Noise. Should there be any issues, please contact MEAN WELL.

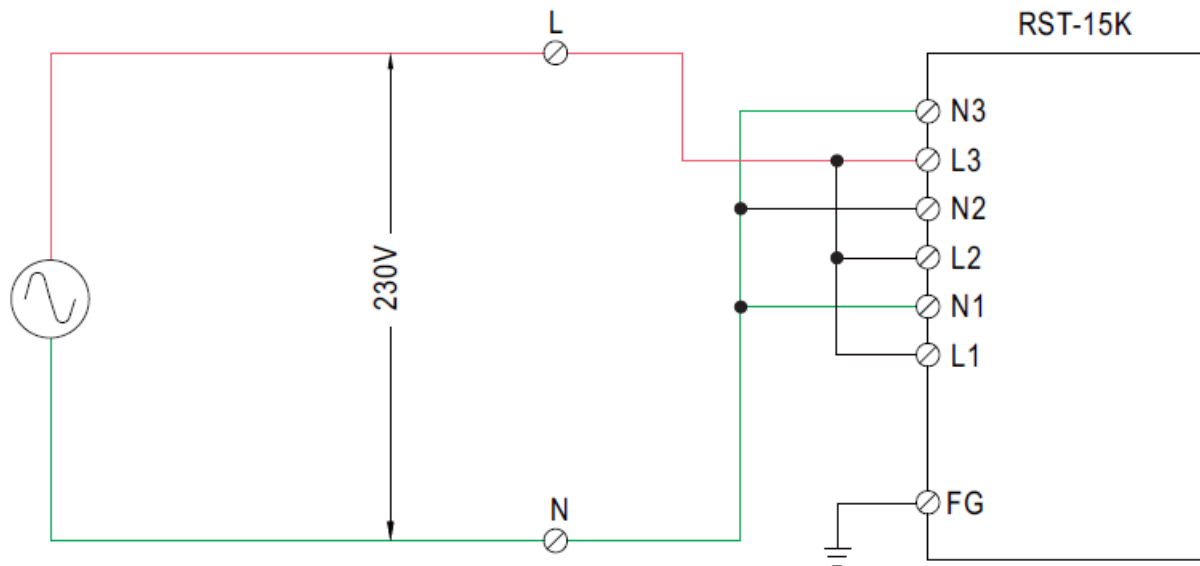


Fig 1.3

Function Manual

1. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

1. Default by potentiometer (SVR)

- Have the DIP switch position-3 set as
- Output voltage can be trimmed by SVR.

2. By Output Voltage Programming

- Have the DIP switch position-3 set as
- The output voltage can be trimmed to 1~120% by applying EXTERNAL VOLTAGE between PV+ and PV- on CN26 or CN27.



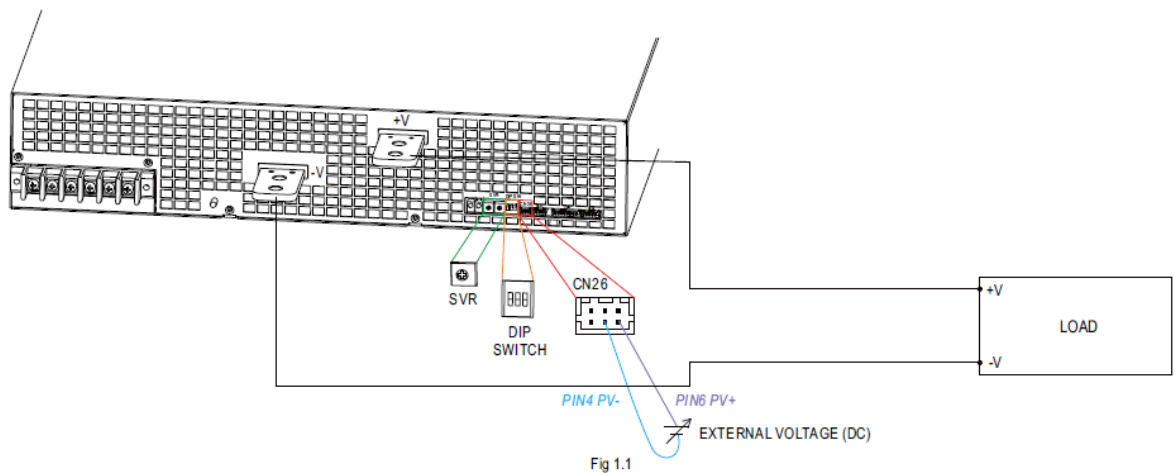


Fig 1.1

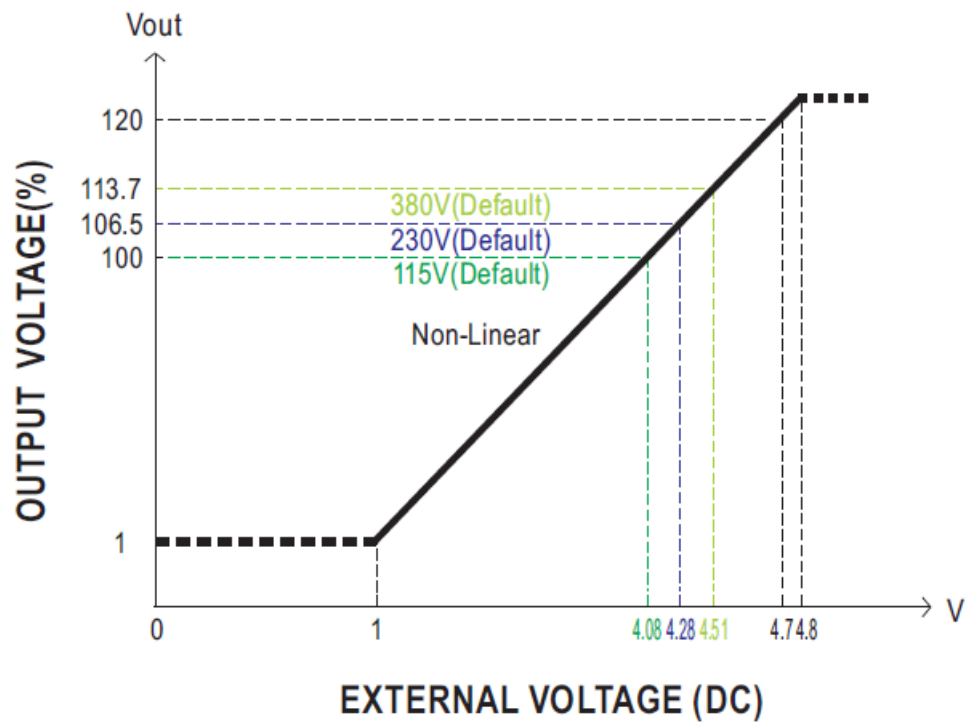

- The 100% output voltage is 115/216/334V.
- When PV signal to adjust voltage under $V_o < 11.5V$ (115V model) / $21.6V$ (230V model) / $33.4V$ (380V model) with dynamic load condition, the V_o overshoot & undershoot might go over rating.

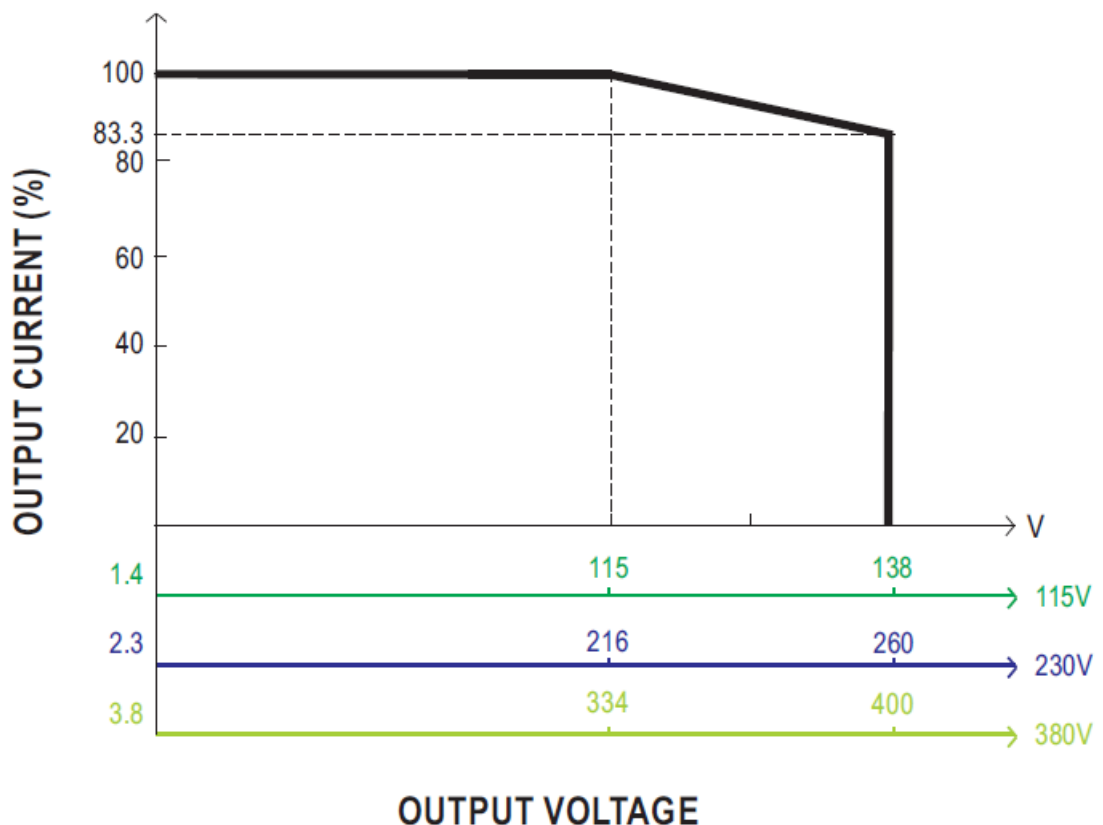

- The rated current should change with the Output Voltage Programming accordingly.
 - Maximum output current is Based on rated power wattage.
- Constant Current Programming (or, PC / remote current programming / dynamic current trim)
 - Default Overload Protection(OLP) 100~107% of rated current
 - Have the DIP switch position-2 set as
 - Output current is set default value.
 - by Constant Current Level Programming

- Have the DIP switch position-2 set as
- The constant current level can be trimmed to 20~100% of the rated current by applying EXTERNAL VOLTAGE between PC+ and PC- on CN26 or CN27.


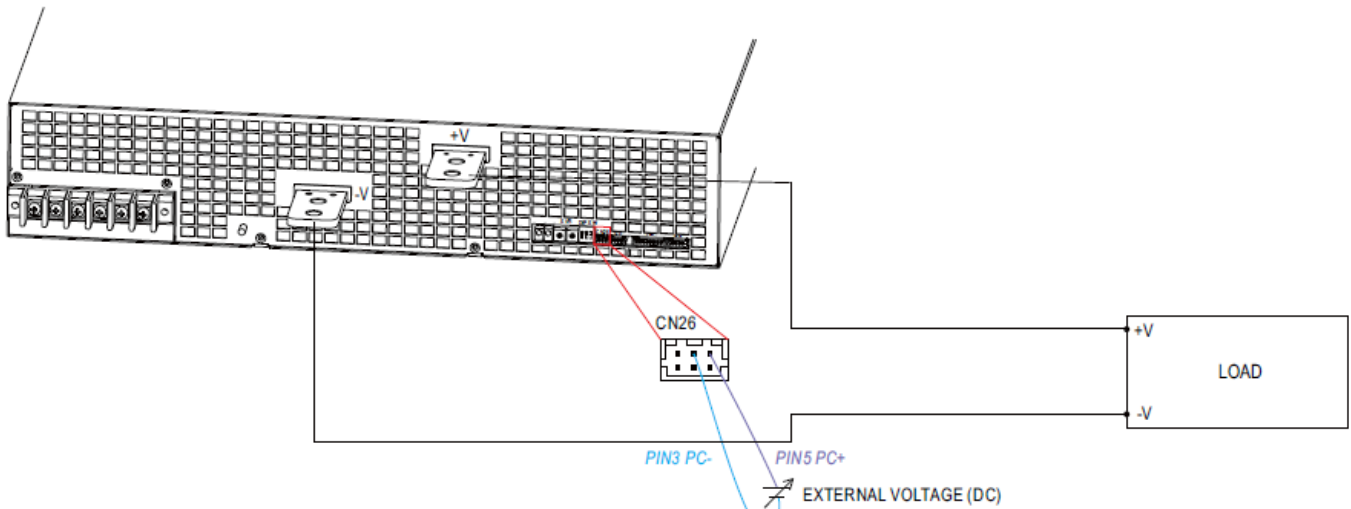


Fig 2.1

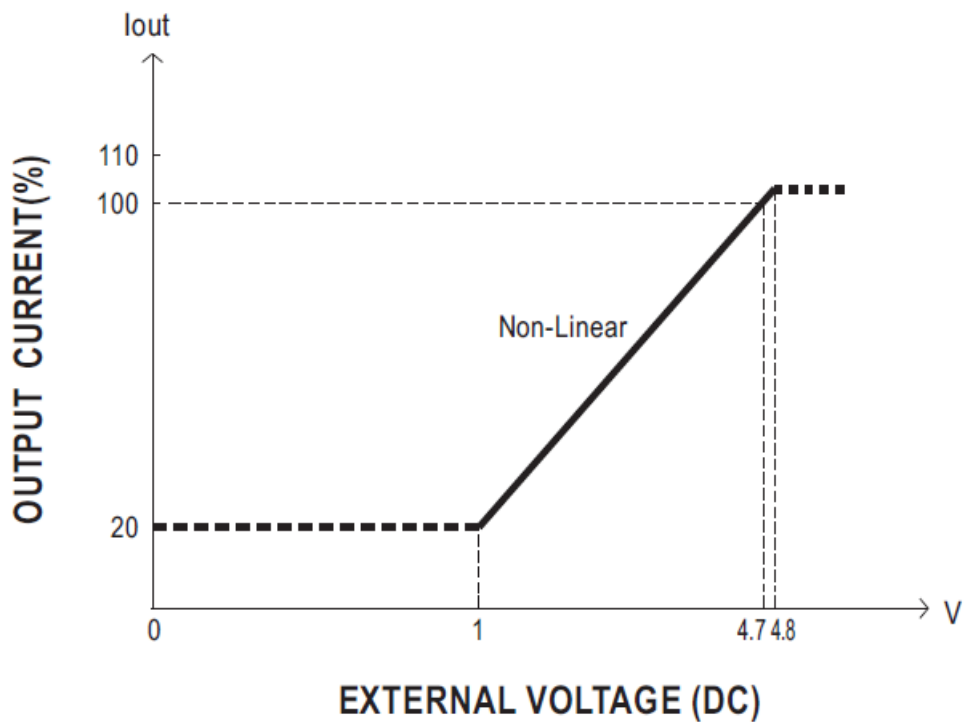


EXTERNAL VOLTAGE (DC)


Fig 2.2


3. Select Overload Protection (OLP) Mode

(1) Default Continuous Constant Current mode

Have the DIPswitch position-1 set as , and RST-15K will work in continuous constant current mode when the output is overloaded and the output voltage is greater than 50% of the rated output voltage.

Delay Shutdown mode




Have the DIPswitch position-1 set as , and RST-15K will shut down after 5 seconds of constant current operation, when the output is overloaded or short-circuited.

Remote ON-OFF Control

- The power supply can be turned ON-OFF by using the “Remote ON-OFF” function.

Between Remote ON-OFF(CN25 pin5) and 12V-AUX(CN25 pin1)	Output Status
Switch close (Short)	power supply ON
Switch open (Open)	power supply OFF

Table 4.1

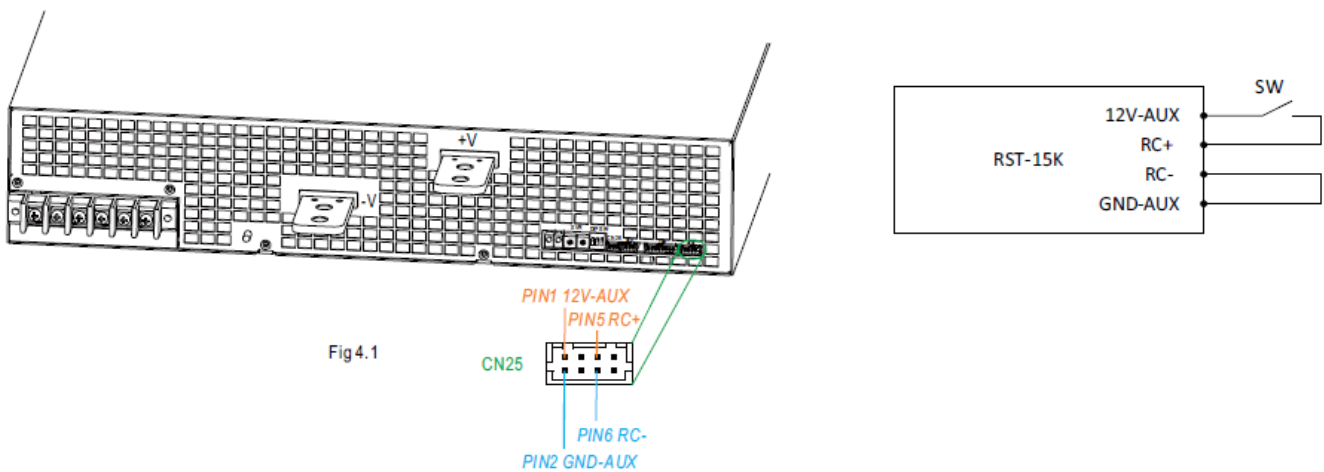

5. Alarm Signal Output

※ There are 4 alarm signals on CN22, and each signal can select two types of output circuit.

(1) Relay contact output {OTP1, OTP1-GND} ; (DC-OK1, DC-OK1-GND) ; (AC-FAIL1-GND, AC-FAIL1) ; (FAN-FAIL1-GND, FAN-FAIL1)} Normally open contact. “Short” when the alarm arises. Relay contact rating(maximum) is 30V/1A resistive.

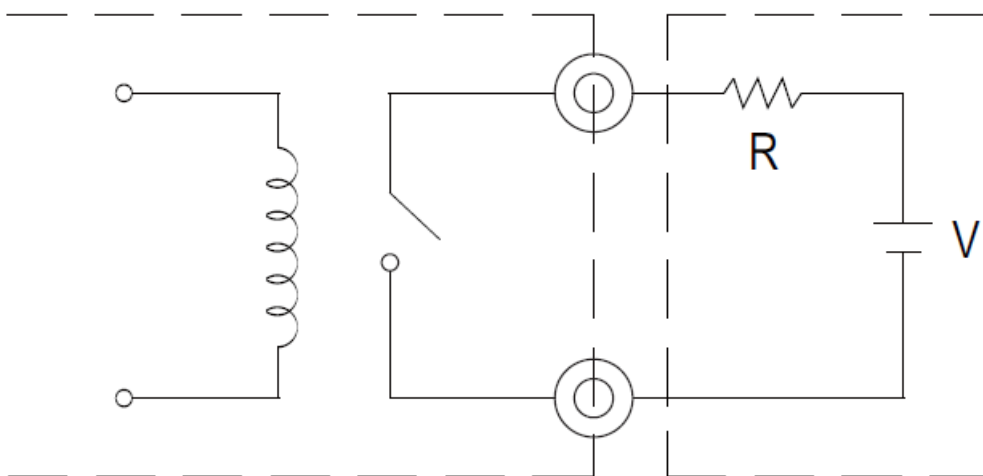


Fig 5.1

(2) Open collector output {DC-OK2-GND, DC-OK2} ; (AC-FAIL2-GND, AC-FAIL2) ; (OTP2, OTP2-GND) ; (FAN-FAIL2, FAN-FAIL2-GND)} An external voltage source is required for this function that is shown in Fig 5.2. These

signals are isolated from output. The maximum sink current is 10mA and the maximum external voltage is 20V (there is a built-in 24V zener diode in inner circuitry).

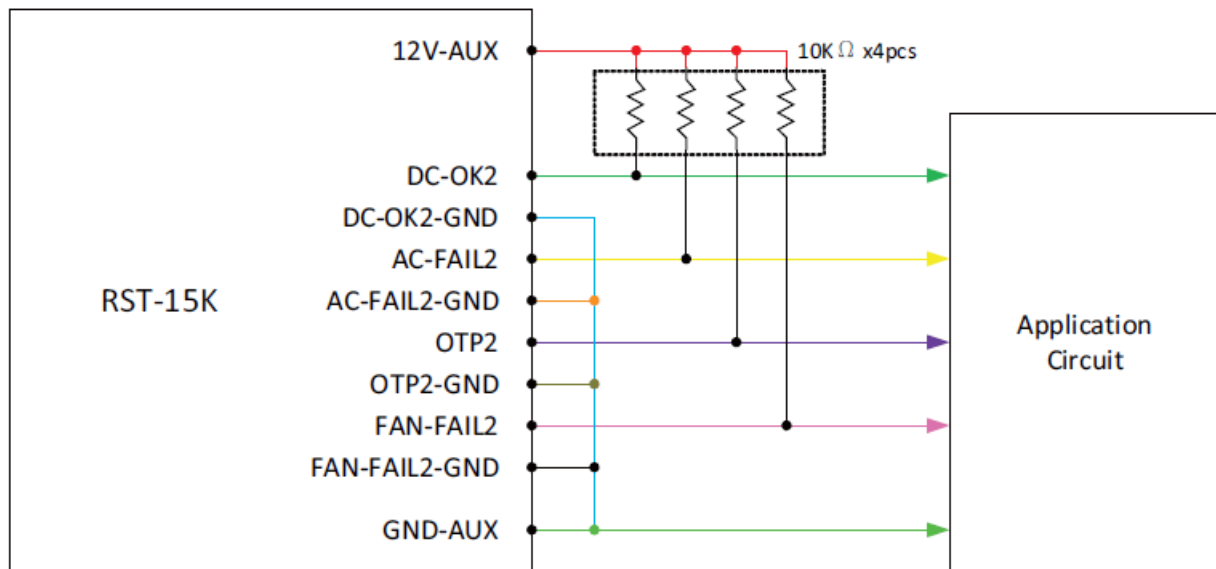


Fig 5.2

6. Current Sharing

RST-15K has the built-in active current sharing function and can be connected in parallel, up to 2 units, to provide higher output power as exhibited below :


※ The voltage difference among each output should be minimized that less than 0.2V is required.

※ The total output current must not exceed the value determined by the following equation.

Maximum output current at parallel operation=(The rated current per unit) \times (Number of unit) \times 0.95


※ When the total output current is less than 5% of the total rated current, or say (5% of Rated current per unit) \times (Number of unit)

the current shared among units may not be fully balanced.

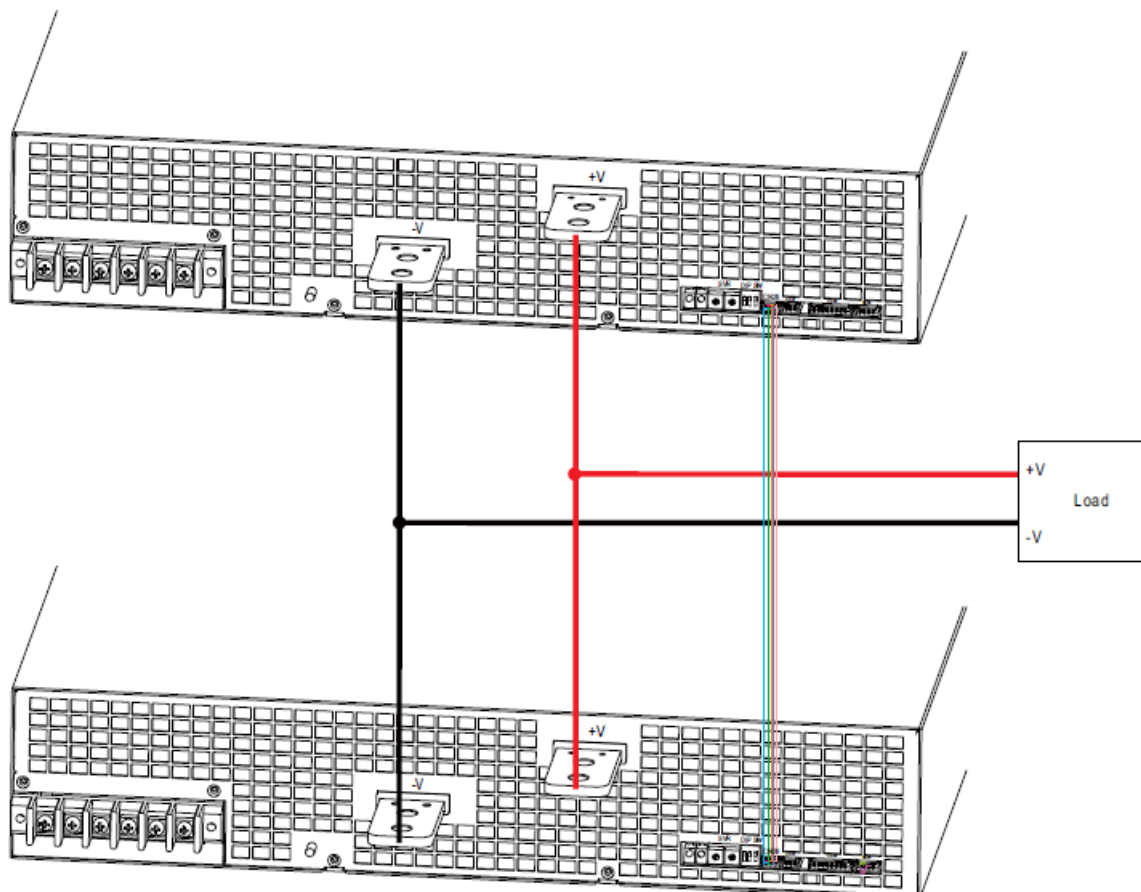


CS+, CS- and RC+, RC- are connected mutually in parallel.

Mechanical Specification

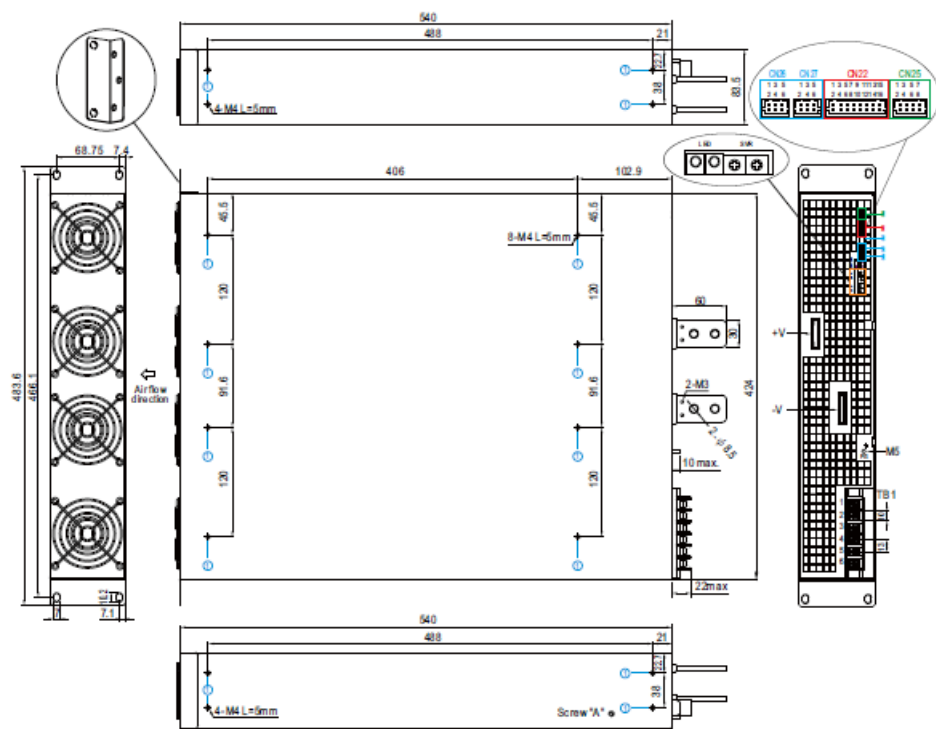


Mounting Instruction

Hole No .	Recommended Screw Si ze	MAX. Penetration Depth L	Recommended mounting torque
1	M4	5mm	7~10Kgf-cm

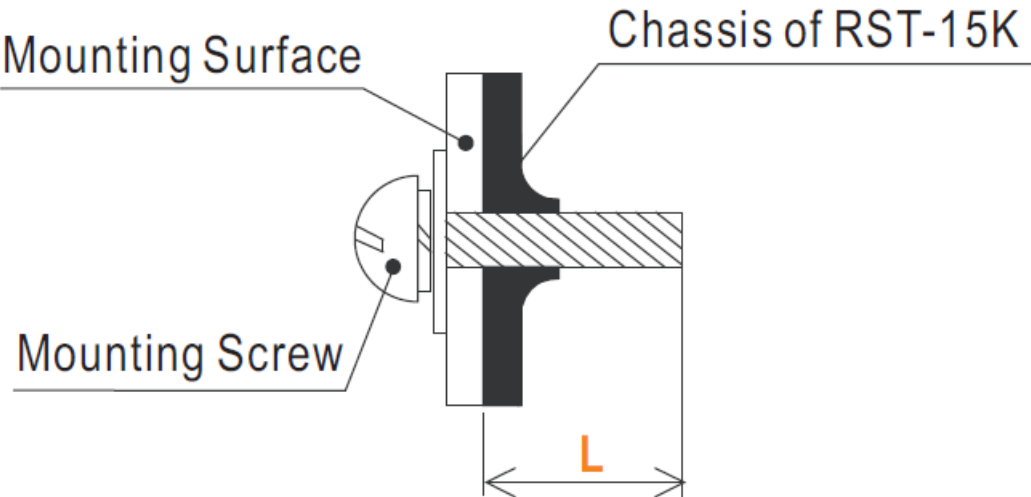

Control Pin No. Assignment CN26,CN27(): HRS DF11-06DP-2DS or equivalent 15




Mating Housing	HRS DF11-06DS or equivalent
Terminal	HRS DF11-**SC or equivalent

CN26 and CN27 are connected internally.

Pin No.	Function	Description
1	CS-	Current sharing signal. When units are connected in parallel, the CS pins of the units should be connected to allow current balance between units.
2	CS+	
3	PC-	Connection for output current programming.
4	PV-	Connection for output voltage programming.
5	PC+	Connection for output current programming.
6	PV+	Connection for output voltage programming.


Control Pin No. Assignment CN22(): HRS DF11-16DP-2DS or equivalent 1 15



Mating Housing	HRS DF11-16DS or equivalent
Terminal	HRS DF11-**SC or equivalent


Pin No.	Function	Description
1	DC-OK1	Alarm signal of DC-OK. Normally open contact. "Short" when the PSU turns on. Relay contact rating(maximum) is 30 V/1A resistive.
2	AC-FAIL1	Alarm signal of AC-fail. Normally open contact. "Short" when the PSU input voltage is too low. Relay contact rating(maximum) is 30V/1A resistive.
3	DC-OK1-GND	Alarm signal of DC-OK. Normally open contact. "Short" when the PSU turns on. Relay contact rating(maximum) is 30 V/1A resistive.



4	AC-FAIL1 -GND	Alarm signal of AC-fail. Normally open contact. "Short" when the PSU input voltage is too low. Relay contact rating(maximum) is 30V/1A resistive.
5	DC-OK2	Alarm signal of DC-OK. Open collector signal. Low when the PSU turns on. The maximum sink current is 10mA and the maximum external voltage is 20V.
6	AC-FAIL2	Alarm signal of AC fail. Open collector signal. Low when the PSU input voltage is too low. The maximum sink current is 10mA and the maximum external voltage is 20V.
7	DC-OK2- GND	Alarm signal of DC-OK. Open collector signal. Low when the PSU turns on. The maximum sink current is 10mA and the maximum external voltage is 20V.
8	AC-FAIL2 -GND	Alarm signal of AC fail. Open collector signal. Low when the PSU input voltage is too low. The maximum sink current is 10mA and the maximum external voltage is 20V.
9	OTP1	Alarm signal of OTP. Normally open contact. "Short" when the PSU over temperature protection occurs. Relay contact rating(maximum) is 30V/1A resistive.
10	FAN-FAIL 2	Alarm signal of fan fail. Open collector signal. Low when the internal fan fails. The maximum sink current is 10mA and the maximum external voltage is 20V.
11	OTP1-GN D	Alarm signal of OTP. Normally open contact. "Short" when the PSU over temperature protection occurs. Relay contact rating(maximum) is 30V/1A resistive.
12	FAN-FAIL 2-GND	Alarm signal of fan fail. Open collector signal. Low when the internal fan fails. The maximum sink current is 10mA and the maximum external voltage is 20V.
13	OTP2	Alarm signal of OTP. Open collector signal. Low when the PSU over temperature protection occurs. The maximum sink current is 10mA and the maximum external voltage is 20V.
14	FAN-FAIL 1	Alarm signal of fan fail. Normally open contact. "Short" when the internal fan fails. Relay contact rating(maximum) is 30V/1A resistive.
15	OTP2-GN D	Alarm signal of OTP. Open collector signal. Low when the PSU over temperature protection occurs. The maximum sink current is 10mA and the maximum external voltage is 20V.
16	FAN-FAIL 1-GND	Alarm signal of fan fail. Normally open contact. "Short" when the internal fan fails. Relay contact rating(maximum) is 30V/1A resistive.




Mating Housing	HRS DF11-08DS or equivalent
Terminal	HRS DF11-**SC or equivalent

Pin No.	Function	Description
1,3	12V-AUX	Auxiliary voltage output, 11.4~12.6V, referenced to pin 2,4(GND-AUX). Only for remote on-off control & Alarm signal. The maximum load current is 0.1A. This output is not controlled by the "Remote ON/OFF" function.
2,4	GND-AUX	Auxiliary voltage output GND. The signal return is isolated from the output terminals (+V & -V).
5,7	RC+	The output can be turned ON-OFF in association with RC+ and RC-.
6,8	RC-	

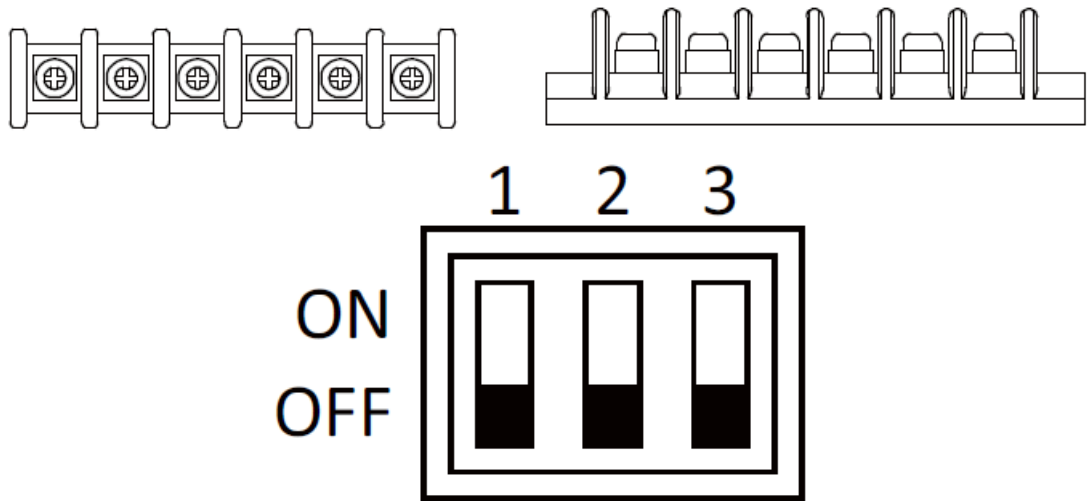

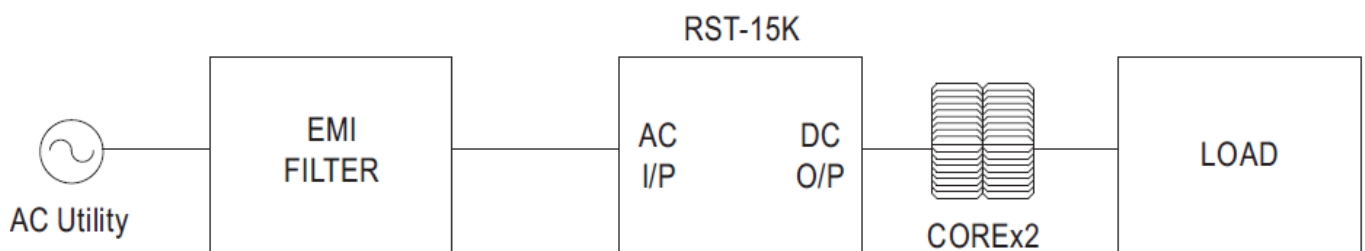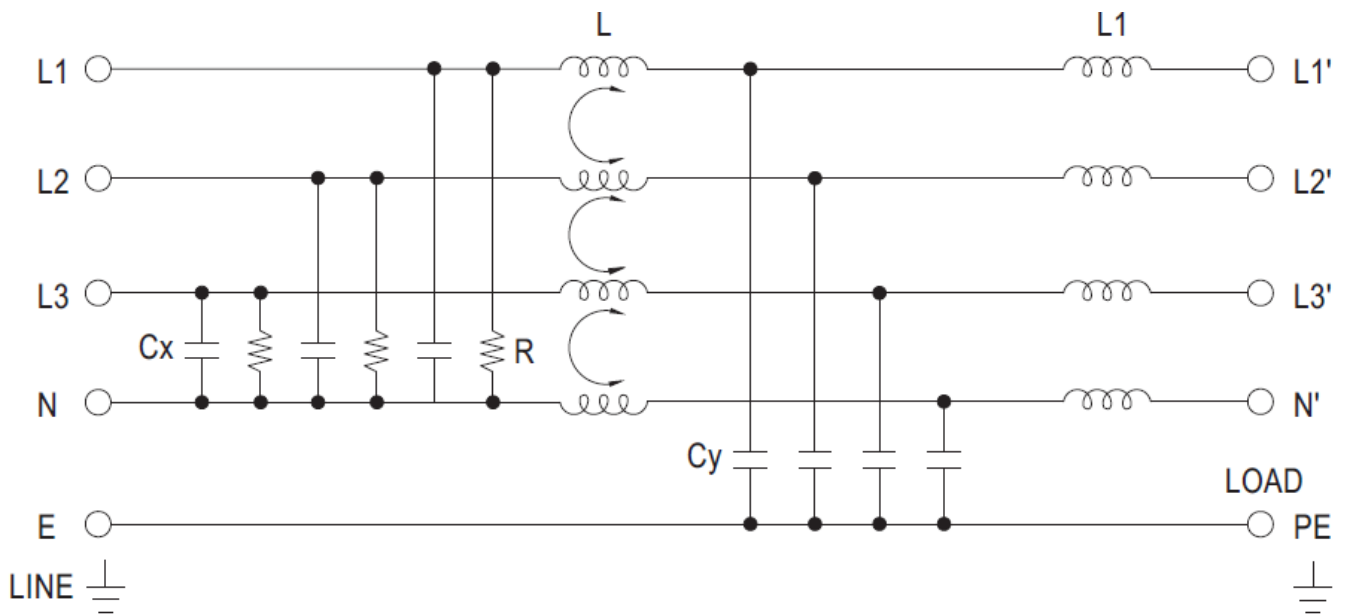

Documents / Resources

	<p>MEAN WELL RST-15K-HV 15KW Input With High Voltage Output [pdf] Instruction Manual RST-15K-HV, 15KW Input With High Voltage Output, High Voltage Output, 15KW Input Output, Output</p>
---	--

References

- [TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [MEAN WELL Switching Power Supply Manufacturer](#)
- [Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [Product Liability Disclaimer-MEAN WELL Switching Power Supply Manufacturer](#)
- [Global Trade Item Number \(GTIN\)-MEAN WELL Switching Power Supply Manufacturer](#)